
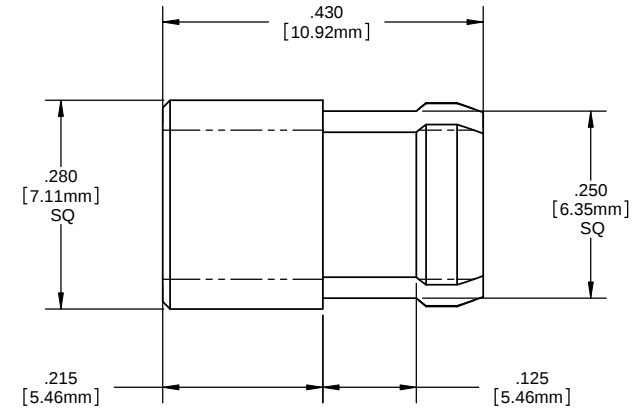



NOTES:

1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] square punched hole on .375 [9.5mm] centers. Panel thickness .063 [1.6mm] to .125 [3.17mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.


REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	4-23-10	SMU



ORDERING CODE : **SQL 360 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES DECIMALS ±.1 X ±.020 XX ±.010 XXX ±.005 FINISH BREAK ALL CORNERS AND SHARP EDGES (SEE VIEW)		MATERIAL POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
THIRD ANGLE PROJECTION THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. AND REPRODUCTION IN WHOLE OR AS A SINGLE PART OF THE DRAWING IS PROHIBITED. VISUAL COMMUNICATIONS COMPANY, INC.		FINISH SEE NOTES		TITLE: 5MM SQUARE STANDARD HEIGHT FRESNEL LENS	
APPROVAL		DATE		SIZE	DWG. NO.
DRAWN: SMU		4-23-10		B	SQL 360 XXX
CHECKED: DZ		4-23-10		SCALE: 1:1	REV 001
DO NOT SCALE DRAWING				SHEET 1 OF 1	