
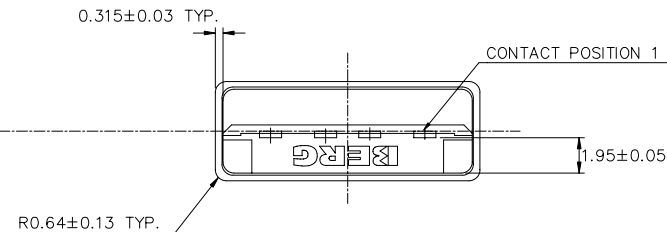
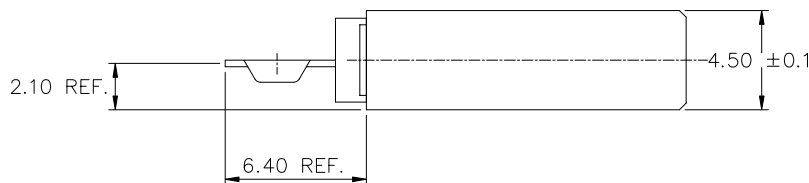


Tous droits strictement reserves. Reproduction ou communication a des tiers int
sans autorisation ecrite du proprietaire.
Droits de reproduction BERG ELECTRONICS BV

All rights strictly reserved. Reproduction or issue to third parties in any for
whatever is not permitted without written authority from the proprietor.
Copyright BERG ELECTRONICS BV

PRODUCT NO.
74032

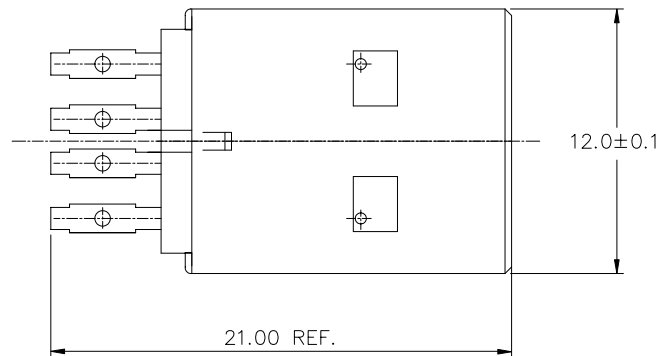

PRODUCT NUMBER CODE

7 4 0 3 2 - X 0 X LF

BASE PRODUCT NUMBER

HOUSING COLOR OPTION

0-WHITE
1-BLACK

TERMINAL PLATING OPTION

1-30 u" GXT IN CONTACT AREA
3-30u"Au IN CONTACT AREA

LEAD FREE OPTION

(SELECTED OR NOT SELECTED)

LF-TIN/LEAD PLATING ON TERMINAL WILL BE REPLACED
WITH PURE TIN PLATING

NOTES:

- 1.MATERIAL:
SHIELD: SPCC
CONTACTS :COPPER ALLOY
HOUSING :UL 94V-0 THERMOPLASTIC COLOR:SEE PRODUCT NUMBER CODE
- 2.CONTACT PLATING : SEE PRODUCT NUMBER CODE
- 3.SHIELD PLATING : 2.5 um MINIMUM NICKEL
- 4.PRINT IS ONLY FOR ASSEMBLY REFERENCE
5. P/N'S WITH SUFFIX "LF" ARE LEAD FREE P/N'S
6. PACKING STANDARD GS-14-920 WILL BE APPLIED FOR LEAD FREE P/N'S
7. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
8. FOR LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TERMERATURE FOR 40 SECONDS IN A CONVECTION,
INFRO-RED OR VAPOR PHASE REFLOW OVEN.

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
rev.	ecn no.	dr	date	linear	.0 ± 0.3 .00 ± 0.20 .000± 0.10	projection		title USB A TYPE PLUG KIT SUB-ASS'Y	
A	T70418	P P	10/06/97	angles	± 2°	unit	mm	product family	code
B	T80068	P P	02/16/98	enr	R Y LIU	08/14/97	scale	size	dwg no.
C	T80388	P P	08/27/98	chr	R Y LIU	08/14/97	A3	74032	sheet 1 OF 1
D	T80579	P P	12/21/98	appd	JENN TSAO	08/14/97			
E	T20162	W L	05/20/02						
F	N05-0097	PH	03/31/05						
sheet	revision	F							
index	sheet								

PDM: Rev:F

STATUS: Released

Printed: Jul 28, 2010