

StaticGuard Automotive Series



Multilayer Varistors for Automotive Applications



GENERAL DESCRIPTION

The StaticGuard Automotive Series are low capacitance versions of the TransGuard and are designed for general ESD protection of CMOS, Bi-Polar, and SiGe based systems. The low capacitance makes these products suitable for use in high speed data transmission lines.

FEATURES

- AEC Q200 Qualified
- ISO 7637 Pulse 1-3 capability
- Meet 27.5Vdc Jump Start requirements
- Multi-strike capability
- Sub 1nS response to ESD strike

HOW TO ORDER

VC Varistor Chip	AS Series AS = Automotive	06 Case Size 04 = 0402 06 = 0603 08 = 0805	LC Low Cap Design	18 Working Voltage 18 = 18.0VDC	X Energy Rating A = 0.10 Joules V = 0.02 Joules X = 0.05 Joules	500 Clamping Voltage 150 = 18V 200 = 22V 300 = 32V 400 = 42V 500 = 50V	R Packaging (PCS/REEL) D = 1,000 R = 4,000 T = 10,000 W = 0402 10000	P Termination P = Ni/S
----------------------------	--	---	-----------------------------	--	--	---	---	-------------------------------------



ELECTRIAL CHARACTERISTICS

AVX Part Number	Working Voltage (DC)	Working Voltage (AC)	Clamping Voltage	Test Current For V_C	Maximum Leakage Current	Transient Energy Rating	Peak Current Rating	Typical Cap	Case Size	Power Dissipation
VCAS04LC18V500	≤ 18.0	≤ 14.0	50	1	10	0.02	15	40	0402	0.0004
VCAS06LC18X500	≤ 18.0	≤ 14.0	50	1	10	0.05	30	50	0603	0.001
VCAS08LC18A500	≤ 18.0	≤ 14.0	50	1	10	0.10	30	80	0805	0.002


V_W (DC)	DC Working Voltage (V)
V_W (AC)	AC Working Voltage (V)
V_C	Clamping Voltage (V @ I_{VC})
I_{VC}	Test Current for V_C (A, 8x20 μ S)
I_L	Maximum Leakage Current at the Working Voltage (μ A)
E_T	Transient Energy Rating (J, 10x1000 μ S)
I_P	Peak Current Rating (A, 8x20 μ S)
Cap	Typical Capacitance (pF) @ frequency specified and 0.5 V_{RMS}

StaticGuard Automotive Series

Multilayer Varistors for Automotive Applications




VOLTAGE/CURRENT CHARACTERISTICS

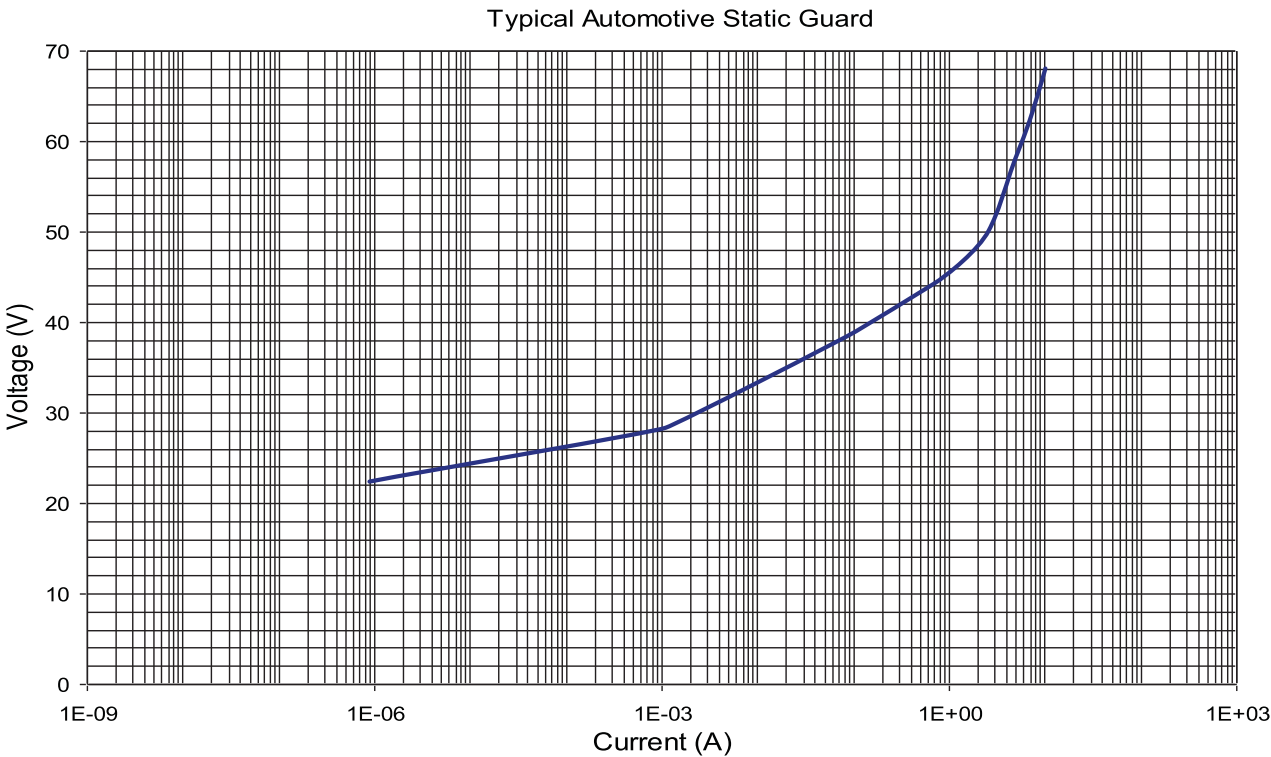

ELECTRICAL TRANSIENT CONDUCTION

ISO 7637 Pulse 1-3

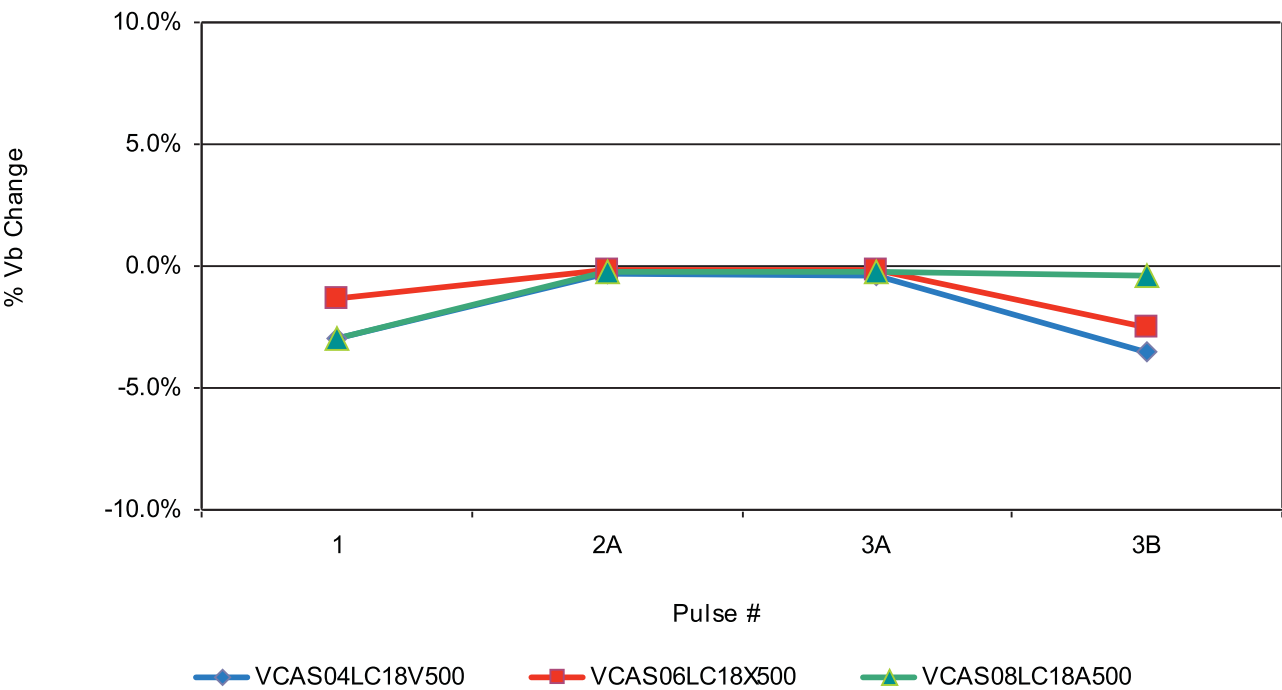


StaticGuard Automotive Series




Multilayer Varistors for Automotive Applications

VOLTAGE/CURRENT CHARACTERISTICS

VCAS04LC18V500

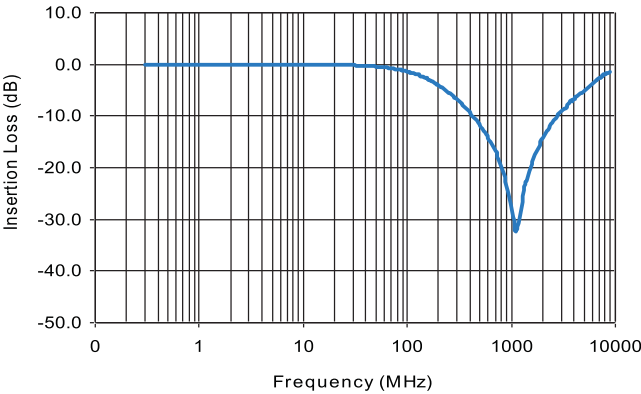

VCAS06LC18X500

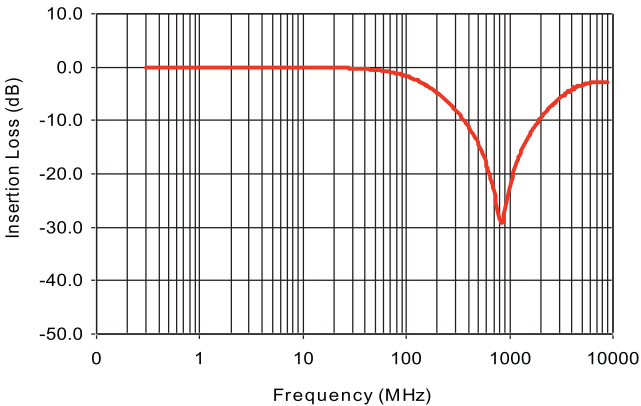

VCAS08LC18A500

