


Slide Switch Spring Return

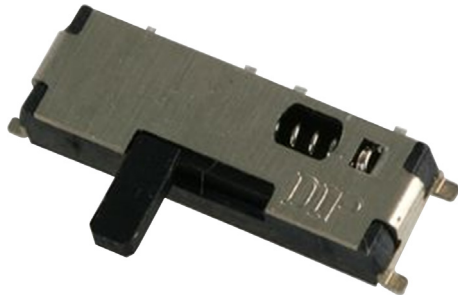

Specifications:

Orientation	: Right Angle
Series	: MCSSS
Termination Type	: SMD
External Depth	: 3.5mm
External Length / Height	: 2mm
External Width	: 11mm
Lever Length	: 2.5mm

Mechanical:

Operating Force	: 180 $\pm$ 70gf
Operating Temperature Range	: -10 to +60°C
Storage Temperature Range	: -20 to +75°C

Electrical:

Electrical Life	: 10,000 cycles
Rating	: 25mA, 24V DC
Maximum Contact Resistance	: 70m Ω
Minimum Insulation Resistance	: 100m Ω at 100V DC
Dielectric Strength	: 100V AC/1 minute
Circuit	: 1P2T
Contact Configuration	: SPDT
Actuator Style	: Lever
Switch Operation	: On-(On)
Switch Mounting	: Panel


Materials:


Cover	: Nickel silver
Spring	: Stainless silver
Contact	: Alloy copper, gold plated
Base	: LCP high temperature thermoplastic
Terminal	: Phosphor bronze, with silver plated

Soldering Process:

Hand Soldering : Use a soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while Applying solder




Reflow Soldering : When applying reflow soldering, the peak temperature of the reflow oven should be set to 260°C maximum

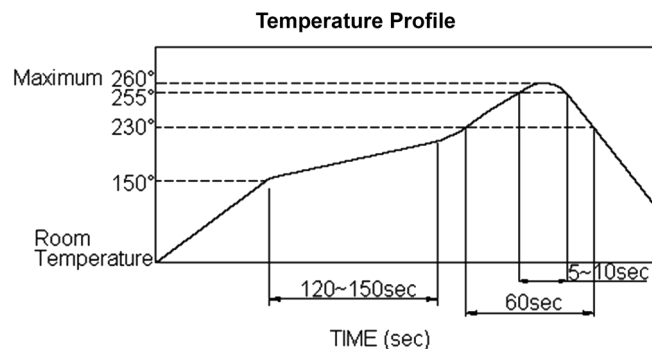

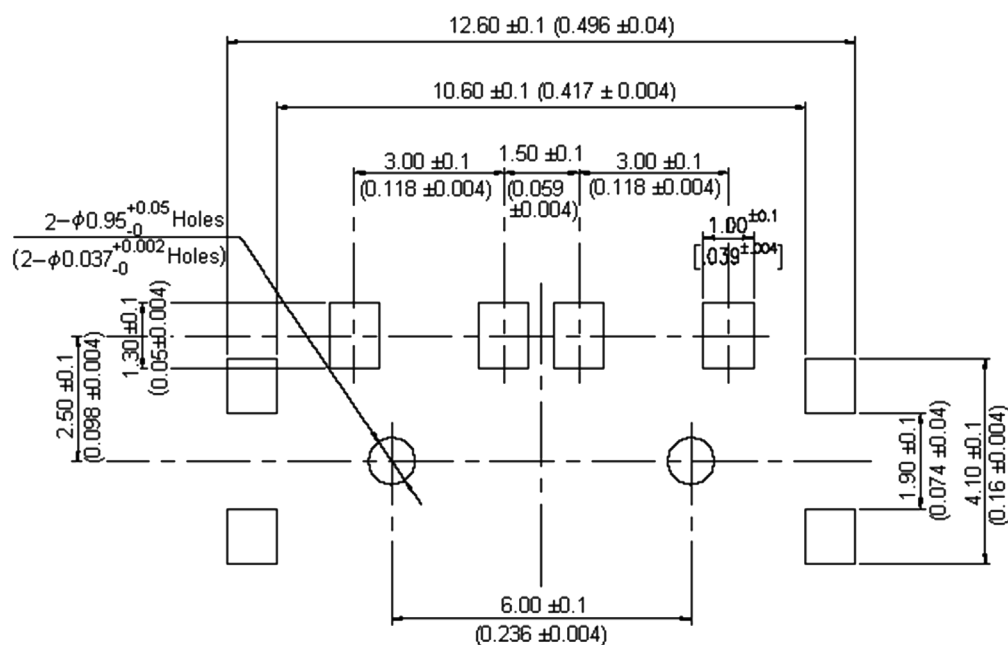[illegible]

Dimensions : Millimetres (Inches)

Slide Switch Spring Return

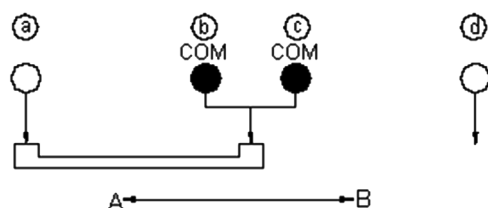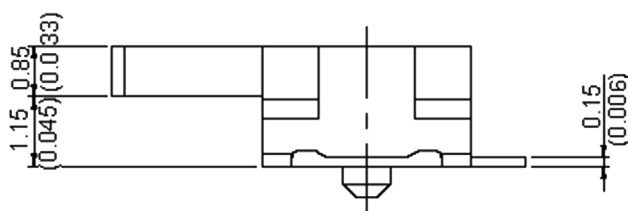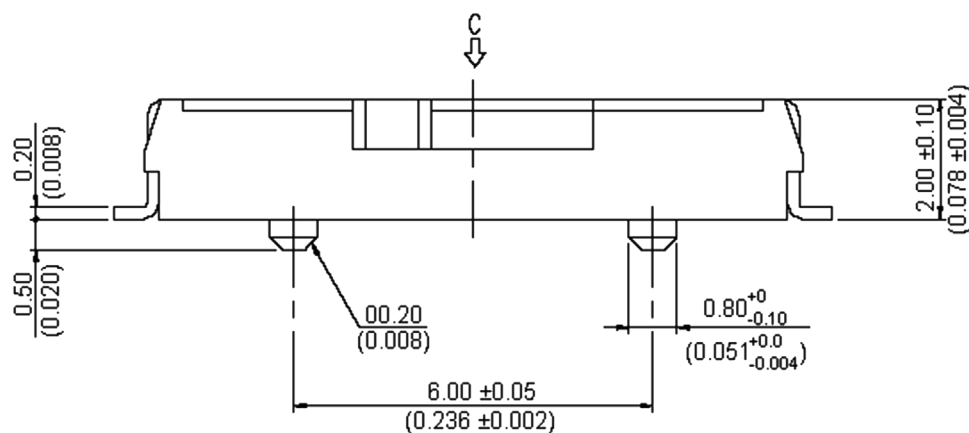

Circuit


Dimensions : Millimetres (Inches)



Slide Switch Spring Return





MCSSS-12RG

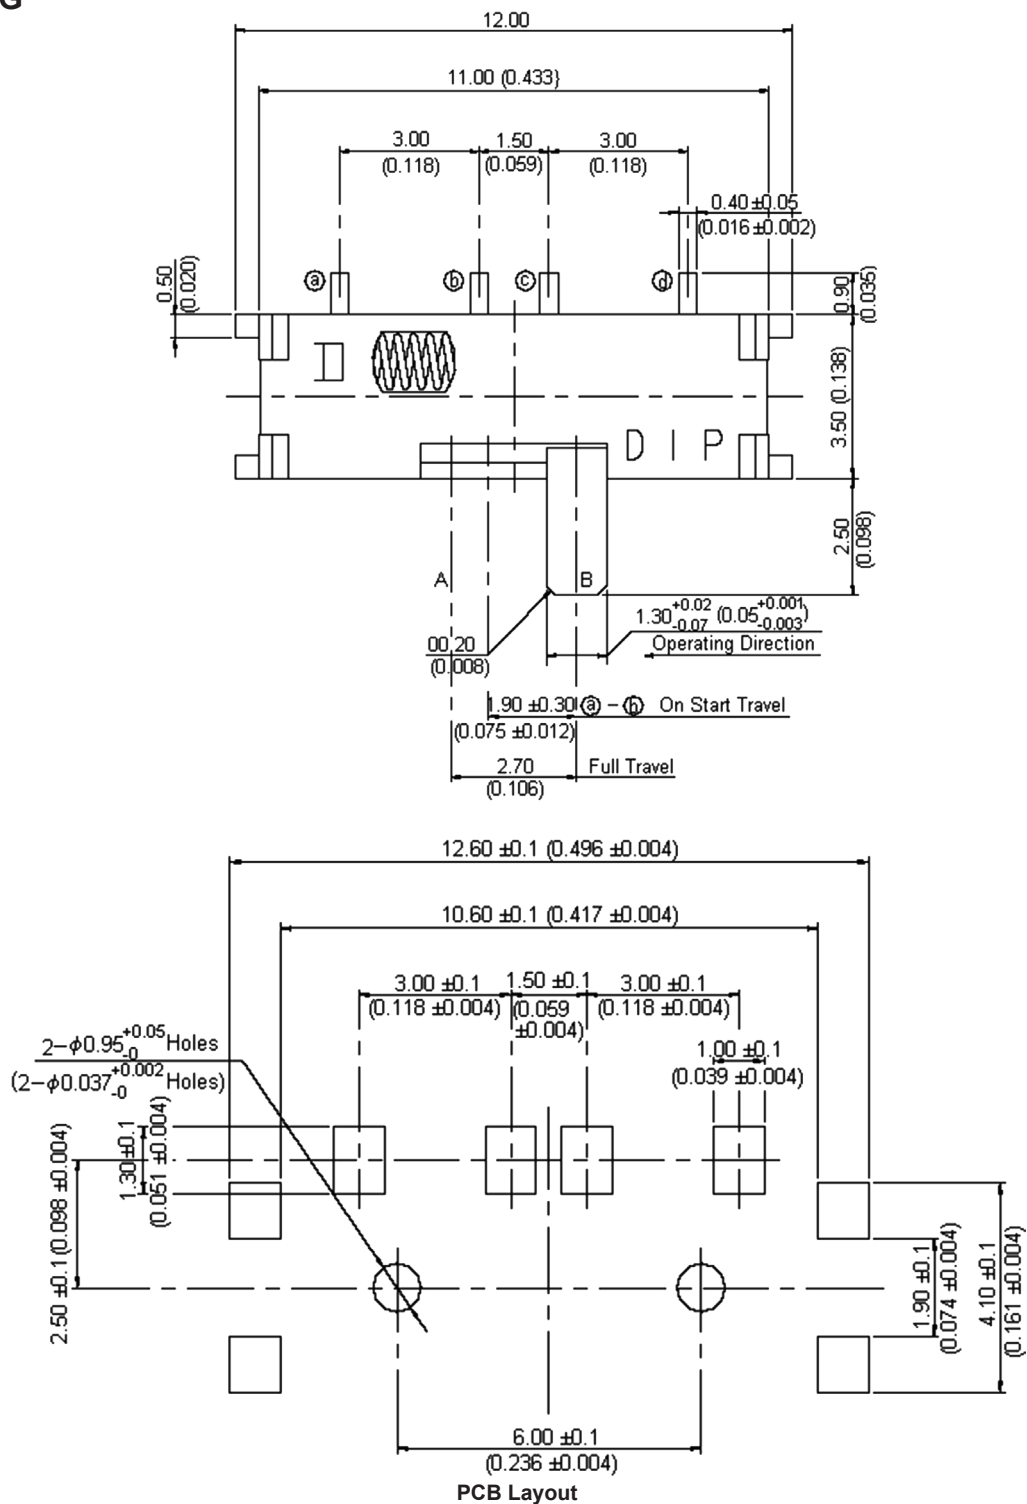

View from the Direction C

Dimensions : Millimetres (Inches)

Slide Switch Spring Return

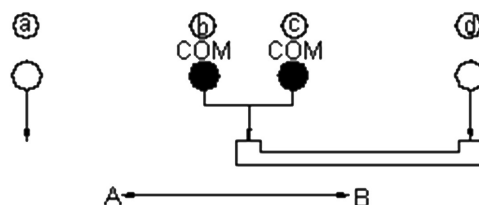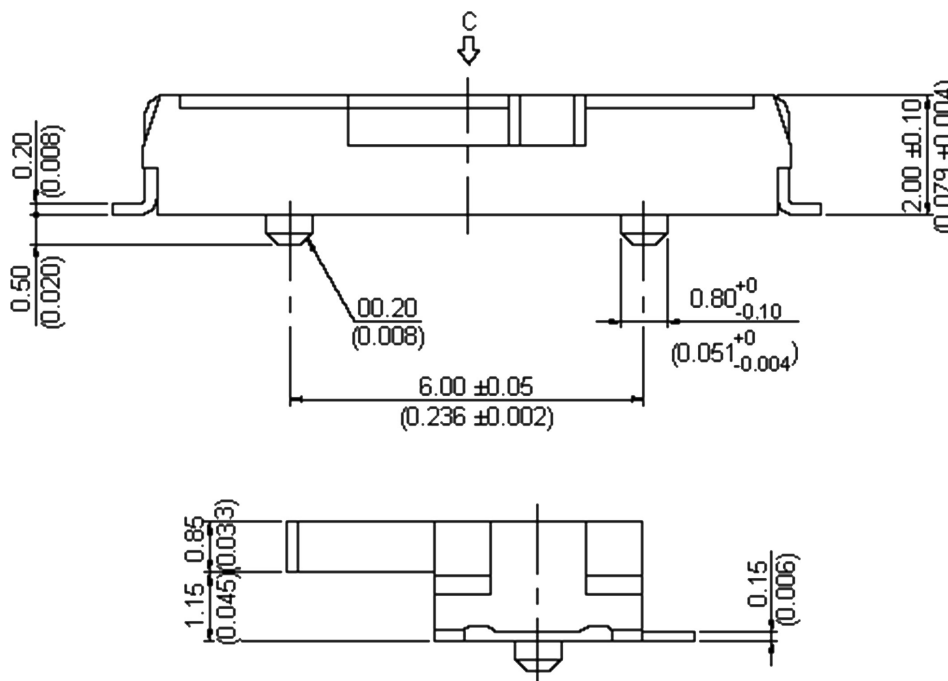

Circuit

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
Slide Switch, SMD, ON-MOM	MCSSS-12LG
Slide Switch, SMD, ON-MOM	MCSSS-12RG

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.