


REVISION		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE OF DWG PER ECO-10-010723	20May2010
B	(-00) Lanyard Max Length was 3.65 per ECO-10-012443	14Jun2010

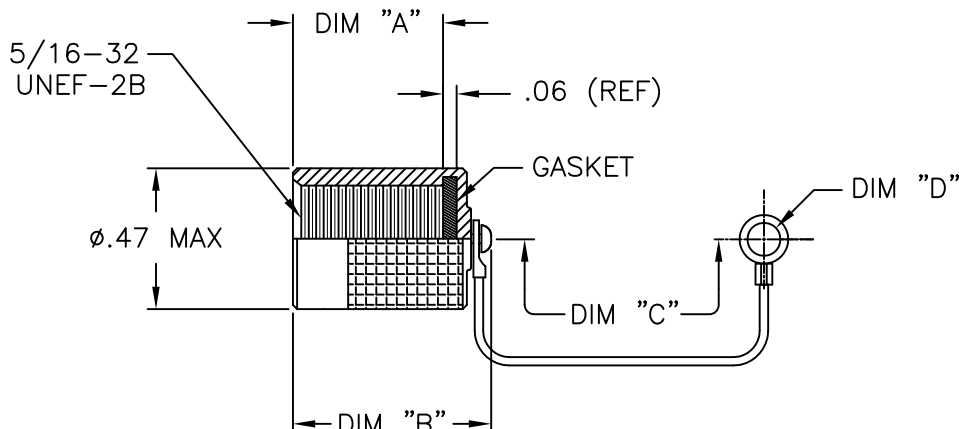

DRAWING NUMBER	DIM "A" (REF)	DIM "B" MAXIMUM	DIM "C" CENTERLINES	DIM "D" (DIAMETER)	WIRE ROPE COATING
D-600-0429-00	.40 [10,2]	.845 [21,47]	3.50/3.75 [88,9/95,25]	.142 ± .010 [3,61 ± 0,25]	TEFLON
D-600-0429-01	.50 [12,7]	.945 [24,0]	7.00 ± .25 [177,8 ± 6,35]	.142 ± .010 [3,61 ± 0,25]	TEFLON
D-600-0429-02	.50 [12,7]	.945 [24,0]	7.00 ± .25 [177,8 ± 6,35]	.325 ± .010 [8,25 ± 0,25]	NONE
D-600-0429-03	.50 [12,7]	.945 [24,0]	3.50/3.65 [88,9/92,71]	.142 ± .010 [3,61 ± 0,25]	TEFLON

NOTES:

1. COMPONENTS: MATERIAL / FINISH

- COVER: ALUM ALLOY / CAD PLATED PER QQ-P-416, TYPE II, OLIVE DRAB OVER ELECTROLESS NICKEL.
- WIRE ROPE ASSEMBLY: CRES / PASSIVATED, COATINGS AS DESCRIBED IN TABLE ABOVE.
- RIVET: STAINLESS STEEL / PASSIVATED PER QQ-P-35.
- GASKET: SILICONE RUBBER.

2. KNURL STYLE IS MAUFACTURER'S OPTION.

If this document is printed it becomes uncontrolled. Check for the latest revision

© 2010 Tyco Electronics Corporation. All Rights Reserved. CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES. METRIC
DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES

.XXX ± 0.005 [0.13 mm]
.XX ± 0.010 [0.25 mm]
.X ± 0.020 [0.50 mm]

ANGLE TOLERANCE

.X ± 0.5 DEG.

DRAWN

G.Rositano

DATE

06/May/10

MATERIAL

SEE NOTES

FINISH

SEE NOTES



Tyco Electronics

Raychem Databus

300 Constitution Drive
Menlo Park, CA 94025 U.S.A.

TITLE

PROTECTIVE COVER,
CAD PLATE, OLIVE DRAB


WEIGHT (MAX)

.0165 LBS. [7.5 gm]

CAD FILE

D-500-0429-00-03_B-CD

THIRD ANGLE
PROJECTION



SIZE
A

CODE IDENT. NO.
06090

DWG. NO.

D-600-0429-00/-03

DO NOT SCALE THIS DRAWING

SHEET 1 OF 1