

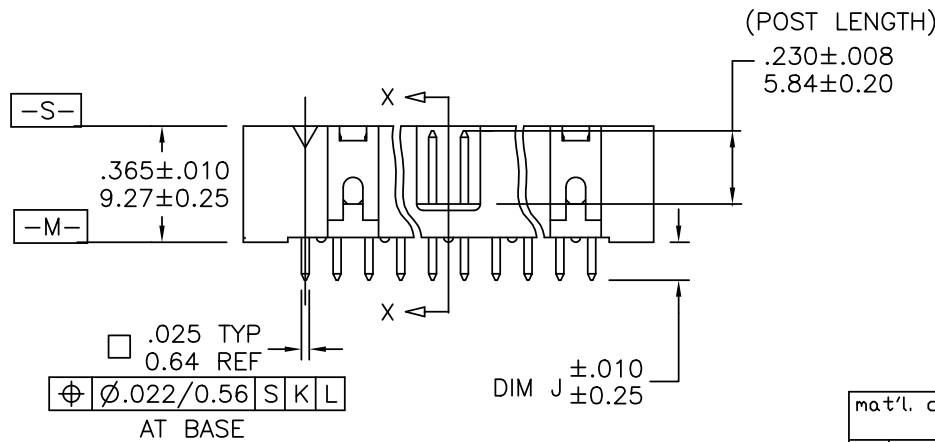


PRODUCT NUMBER
SEE TABLE


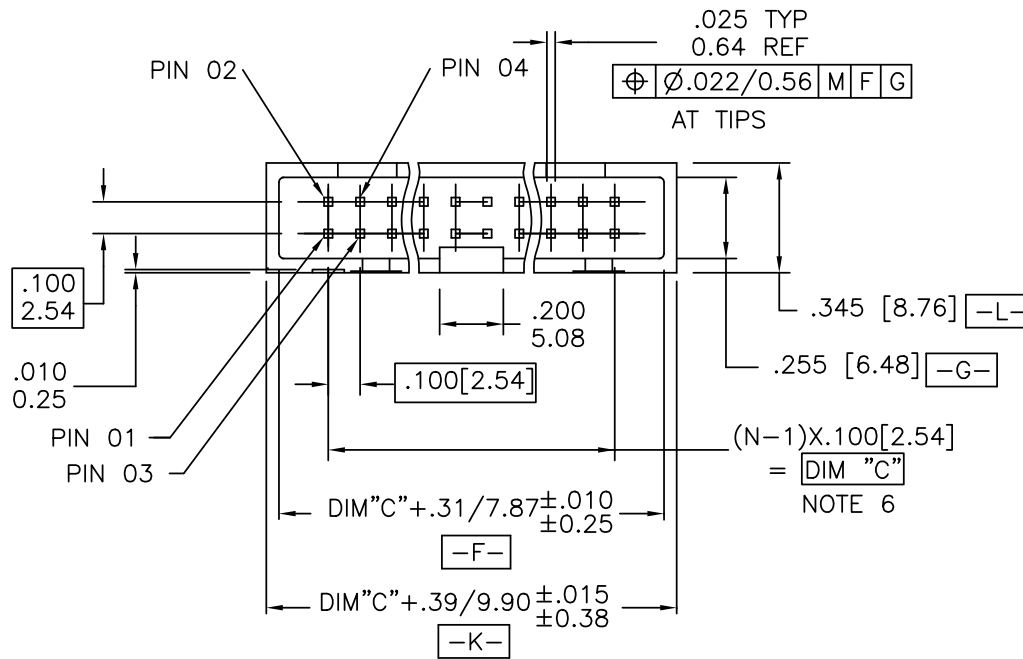


mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 1302	ISO 406	ISO 1101	QUICKIE
ltr	ecr	n	dr	date	tolerances unless otherwise specified
H	N05-0123	ZC	5/9/05		angles
J	N07-0151	WG	8/02/07		linear
K	SLX-N-012098	J.Z	2012-07-04	$\pm 2^\circ$	
dr	M. CLOUSER	7/11/90			
engr	M. SMYK	7/11/90			
chr	M. SMYK	8/21/91			
appd	M. SMYK	8/21/91			
sheet	revision	K	K	K	K
index	sheet	1	2	3	4
		5	6	7	8
		9	10		

title	product family
HEADER, QUICKIE, SLIM LINE	QUICKIE
VERTICAL, 4-WALL	
dwg no	sheet of 10 size
88880	A3
type	Product Customer Drawing

PRODUCT NUMBER
SEE TABLE

HEADER STYLE

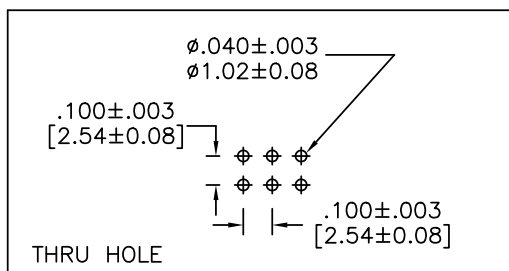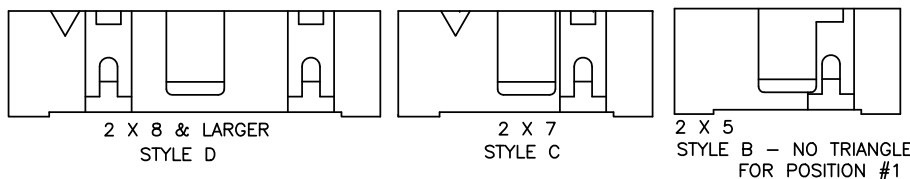

RECOMMENDED BOARD LAYOUT

NOTES:

1. SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
2. MOLDING MATERIAL: GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94 V-0, COLOR: BLACK.
3. 1° MAX. DRAFT PERMISSIBLE ON ALL SURFACES.
4. 3 LBS./1.36 KG MIN. TERMINAL PULL-OUT FORCE.
5. TERMINAL MATERIAL: PHOSPHORUS BRONZE.
6. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
7. SEE 68751 FOR LATCHES.
8. PART NUMBERS WITH "R" FOLLOWING THE PART NUMBER (EXAMPLE 66506-326 R) HAS RETENTION. (ONLY PARTS WITH .105, .120, AND .150 ROUND OR SQUARE TAILS CAN HAVE RETENTION.) LOCATION IS MANUFACTURERS OPTION.
FOR CONNECTORS:
RETENTIVE LEG APPLICABLE TO TAIL LENGTHS .125/3.18 MAX.
5LB/2.3KG MAX INSERTION FORCE AND .25LB/1KG MIN RETENTION FORCE
PER RETENTIVE PIN USING .062/1.57 THICK CIRCUIT BOARD AND RECOMMENDED HOLE PATTERN. RETENTIVE LOCATION AT THE DISCRETION OF THE MANUFACTURER. RETENTION PIN MAY BE SHIFTED TO NEXT POSITION.
9. PART NUMBERS WITH "T" FOLLOWING PART NUMBER (EXAMPLE 66506-068 T IS PACKED IN TUBES.) (CALL PRODUCT MANAGER FOR AVAILABILITY.)
10. MAY BE ORDERED WITH "G" PACK PACKAGING BY ADDING "G" TO DASH NUMBER.
11. UNDER PLATING: 50μ"/1.27μm Ni.
12. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION & PART NUMBERS WITH "LF" SUFFIX ADDED IN THE TABLE ARE LEAD FREE.
13. IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
14. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
15. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."
16. PLATING OPTIONS:
PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON CONTACT OR TAIL, OPTIONALLY TIN ON TAIL.

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family QUICKIE
l	tr	ec	n	dr	date
K					
		angles	linear	tolerances unless otherwise specified	
		±2°		X.XX±.01/X.XX±.03	
				X.XX±.005/X.XX±.013	
				X.XX±.0020/X.XX±.0051	
		dr	M. CLOUSER	7/11/90	
		engr	M. SMYK	7/11/90	
		chr	M. SMYK	8/21/91	
		appd	M. SMYK	8/21/91	
sheet	revision				
index	sheet				



FCIconnect.com

Copyright FCI

PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
88880-001	2 X 5	B	. 400/10. 16	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	NOTE 2
-002				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-003				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-004				. 105/2. 67	150u"/3. 81u TIN	
-005				. 150/3. 81	150u"/3. 81u TIN	
-006	2 X 5	B	. 400/10. 16	. 675/17. 15	150u"/3. 81u TIN	
-007	2 X 10	D	. 900/22. 86	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-008				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-009				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-010				. 105/2. 67	150u"/3. 81u TIN	
-011				. 150/3. 81	150u"/3. 81u TIN	
-012	2 X 10		. 900/22. 86	. 675/17. 15	150u"/3. 81u TIN	
-013	2 X 13		1. 200/30. 48	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-014				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-015				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-016				. 105/2. 67	150u"/3. 81u TIN	
-017				. 150/3. 81	150u"/3. 81u TIN	
-018	2 X 13		1. 200/30. 48	. 675/17. 15	150u"/3. 81u TIN	
-019	2 X 17		1. 600/40. 64	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-020				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-021				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-022				. 105/2. 67	150u"/3. 81u TIN	
-023				. 150/3. 81	150u"/3. 81u TIN	
-024	2 X 17		1. 600/40. 64	. 675/17. 15	150u"/3. 81u TIN	
-025	2 X 20		1. 900/48. 26	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-026				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-027				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-028				. 105/2. 67	150u"/3. 81u TIN	
-029				. 150/3. 81	150u"/3. 81u TIN	
-030	2 X 20		1. 900/48. 26	. 675/17. 15	150u"/3. 81u TIN	
-031	2 X 25		2. 400/60. 96	. 105/2. 67	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-032				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-033				. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-034				. 105/2. 67	150u"/3. 81u TIN	
88880-035	2 X 25	D	2. 400/60. 96	. 150/3. 81	150u"/3. 81u TIN	NOTE 2

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family QUICKIE	
ltr ecn nchr date		tolerances unless otherwise specified		angles linear ±2°		scale 1:1		title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL	
K		dir M. CLOUSER 7/11/90		engr M. SMYK 7/11/90		chr M. SMYK 8/21/91		dwg no 88880	
		appd M. SMYK 8/21/91						type Product Customer Drawing	
sheet index		revision sheet						size A3	

PRODUCT NO.	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
NOTE 8 & 9						
88880-036	2 X 25	D	2. 400/60. 96	. 675/17. 15	150u" /3. 81u TIN	NOTE 2
-037	2 X 7	C	. 600/15. 24	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-038				. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-039				. 675/17. 15	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-040				. 105/2. 67	150u" /3. 81u TIN	
-041				. 150/3. 81	150u" /3. 81u TIN	
-042	2 X 7	C	. 600/15. 24	. 675/17. 15	150u" /3. 81u TIN	
-043	2 X 8	D	. 700/17. 78	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-044				. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-045				. 675/17. 15	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-046				. 105/2. 67	150u" /3. 81u TIN	
-047				. 150/3. 81	150u" /3. 81u TIN	
-048	2 X 8	D	. 700/17. 78	. 675/17. 15	150u" /3. 81u TIN	
-049	2 X 5	B	. 400/10. 16	. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-050	2 X 10	D	. 900/22. 86			
-051	2 X 13		1. 200/30. 48			
-052	2 X 17		1. 600/40. 64			
-053	2 X 20		1. 900/48. 26			
-054	2 X 25	D	2. 400/60. 96			
-055	2 X 7	C	. 600/15. 24			
-056	2 X 8	D	. 700/17. 78	. 150/3. 81		
-057	2 X 30		2. 900/73. 66	. 105/2. 67		
-058				. 150/3. 81		
-059				. 675/17. 15	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-060				. 105/2. 67	150u" /3. 81u TIN	
-061				. 150/3. 81	150u" /3. 81u TIN	
-062				. 675/17. 15	150u" /3. 81u TIN	
-063				. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-064				. 150/3. 81		
-065	2 X 30	D	2. 900/73. 66	. 675/17. 15		
-066	2 X 5	B	. 400/10. 16	. 105/2. 67		
-067	2 X 5	B	. 400/10. 16	. 675/17. 15		
-068	2 X 7	C	. 600/15. 24	. 105/2. 67		
-069	2 X 7	C	. 600/15. 24	. 675/17. 15		
88880-070	2 X 8	D	. 700/17. 78	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE	
ltr ecn nodr date		tolerances unless otherwise specified		linear XXX.X/XXX.X XXX.X/XXX.X XXX.X/XXX.X		INCH/MM		title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL	
K		angles ±2°				scale 1:1		dwg no 88880	
		dir		M. CLOUSER 7/11/90				shee# of 10 size A3	
		enr		M. SMYK 7/11/90					
		chr		M. SMYK 8/21/91					
		app		M. SMYK 8/21/91				type Product Customer Drawing	
sheet index		revision sheet							

FCI
FCIconnect.com

Copyright FCI

D



Copyright FCI

1		2		3		4		5		6	
PRODUCT NO.		SIZE	STYLE	DIM C	DIM J	PIN PLATING		PLASTIC MATERIAL			
NOTE 8 & 9											
88880-071		2 X 8	D	. 700/17. 78	. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni		NOTE 2			
-072		2 X 10		. 900/22. 86	. 105/2. 67						
-073		2 X 10		. 900/22. 86	. 675/17. 15						
-074		2 X 13		1. 200/30. 48	. 105/2. 67						
-075		2 X 13		1. 200/30. 48	. 675/17. 15						
-076		2 X 17		1. 600/40. 64	. 105/2. 67						
-077		2 X 17		1. 600/40. 64	. 675/17. 15						
-078		2 X 20		1. 900/48. 26	. 105/2. 67						
-079		2 X 20		1. 900/48. 26	. 675/17. 15						
-080		2 X 25		2. 400/60. 96	. 105/2. 67						
-081		2 X 25	D	2. 400/60. 96	. 675/17. 15	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni					
-082		2 X 5	B	. 400/10. 16	. 105/2. 67	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni					
-083		2 X 5	B	. 400/10. 16	. 150/3. 81						
-084		2 X 5	B	. 400/10. 16	. 675/17. 15						
-085		2 X 7	C	. 600/15. 24	. 105/2. 67						
-086		2 X 7	C	. 600/15. 24	. 150/3. 81						
-087		2 X 7	C	. 600/15. 24	. 675/17. 15						
-088		2 X 8	D	. 700/17. 78	. 105/2. 67						
-089		2 X 8		. 700/17. 78	. 150/3. 81						
-090		2 X 8		. 700/17. 78	. 675/17. 15						
-091		2 X 10		. 900/22. 86	. 105/2. 67						
-092		2 X 10		. 900/22. 86	. 150/3. 81						
-093		2 X 10		. 900/22. 86	. 675/17. 15						
-094		2 X 13		1. 200/30. 48	. 105/2. 67						
-095		2 X 13		1. 200/30. 48	. 150/3. 81						
-096		2 X 13		1. 200/30. 48	. 675/17. 15						
-097		2 X 17		1. 600/40. 64	. 105/2. 67						
-098		2 X 17		1. 600/40. 64	. 150/3. 81						
-099		2 X 17		1. 600/40. 64	. 675/17. 15						
-100		2 X 20		1. 900/48. 26	. 105/2. 67						
-101		2 X 20		1. 900/48. 26	. 150/3. 81						
-102		2 X 20		1. 900/48. 26	. 675/17. 15						
-103		2 X 25		2. 400/60. 96	. 105/2. 67						
-104		2 X 25		2. 400/60. 96	. 150/3. 81						
88880-105		2 X 25	D	2. 400/60. 96	. 675/17. 15	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni		NOTE 2			

FCIconnect.com

FCI

Form A3

mat'l. code		surface		tolerance		projection		product family	
ISO 1302		✓		ISO 406		ISO 1101		QUICKIE	
ltn ecn nopr		date		tolerances unless otherwise specified		INCH/MM		title	
K				linear		scale 1:1		HEADER, QUICKIE, SLIM LINE	
				±2"				VERTICAL, 4-WALL	
				dr		M. CLOUSER		dwg no	
				engr		M. SMYK		shee5 of10size	
				chr		M. SMYK		88880	
				appd		M. SMYK		A3	
sheet		revision						type Product Customer Drawing	
index		sheet							

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

</

mat'l. code		surface	tolerance	projection	product family	
		ISO 1302	ISO 406 ISO 1101		QUICKIE	
ltr	ecr	ndr	date	tolerances unless otherwise specified		title
K				angles	linear	HEADER, QUICKIE, SLIM LINE
						VERTICAL, 4-WALL
				±2°		
				dr	M. CLOUSER	7/11/90
				engr	M. SMYK	7/11/90
				chr	M. SMYK	8/21/91
				appd	M. SMYK	8/21/91
sheet	revision					
index	sheet					

scale 1:1		dwg no		shee	5 of 10	size
		88880				A3
		type		Product Customer Drawing		

1

2 3

4

5

6

PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
88880-106	2 X 30	D	2. 900/73. 66	. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2
-107	2 X 30	D	2. 900/73. 66	. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-108	2 X 30	D	2. 900/73. 66	. 675/17. 15	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-109	2 X 5	B	. 400/10. 16	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-110				. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-111				. 675/17. 15	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-112				. 105/2. 67	150u" /3. 81u TIN	
-113				. 150/3. 81	150u" /3. 81u TIN	
-114				. 675/17. 15	150u" /3. 81u TIN	
-115				. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-116				. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-117				. 675/17. 15	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-118				. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-119				. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
88880-120	2 X 5	B	. 400/10. 16	. 675/17. 15	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2
88880-121	DISCONTINUED					
THRU						
88880-216						
88880-217	2 X 12	D	1. 100/27. 94	. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2
-218					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-219					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-220				. 105/2. 67	150u" /3. 81u TIN	
-221				. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-222					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-223					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-224				. 150/3. 81	150u" /3. 81u TIN	
-225				. 675/17. 15	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-226					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-227					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-228	2 X 12		1. 100/27. 94	. 675/17. 15	150u" /3. 81u TIN	
-229	2 X 15		1. 400/35. 56	. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-230					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-231					30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-232				. 105/2. 67	150u" /3. 81u TIN	
88880-233	2 X 15	D	1. 400/35. 56	. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE	
ltr ecn nldr date		tolerances unless otherwise specified		linear		INCH/MM		title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL	
K		angles		±2"		scale 1:1		dwg no 88880	
		dir		M. CLOUSER		7/11/90		shee 6 of 10 size	
		engr		M. SMYK		7/11/90		A3	
		chr		M. SMYK		8/21/91			
		appd		M. SMYK		8/21/91		type Product Customer Drawing	
sheet index		revision sheet							



FCIconnect.com

Copyright FCI

PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
88880-234	2 X 15	D	1. 400/35. 56	. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	NOTE 2
-235				. 150/3. 81	30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-236				. 150/3. 81	150u"/3. 81u TIN	
-237				. 675/17. 15	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-238					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-239					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-240	2 X 15		1. 400/35. 56	. 675/17. 15	150u"/3. 81u TIN	
-241	2 X 22		2. 100/53. 34	. 105/2. 67	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-242					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-243					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-244				. 105/2. 67	150u"/3. 81u TIN	
-245				. 150/3. 81	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-246					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-247					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-248				. 150/3. 81	150u"/3. 81u TIN	
-249				. 675/17. 15	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-250					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-251					30u"/0. 76u MIN (NOTE 16) OVER 50u"/1. 27u Ni	
-252	2 X 22					
88880-253	2 X 17	D	1. 600/40. 64	. 105/2. 67	15u"/0. 38u MIN (NOTE 16) OVER 50u"/1. 27u Ni	NOTE 2
88880-254	UNAVAILABLE					
THRU						
88880-279	UNAVAILABLE					
88880-280	2 X 10	D	. 900/22. 86	. 105/2. 67	150u"/3. 81u TIN	NOTE 2
88880-281	UNAVAILABLE					
THRU						
88880-306						

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection FIRST ANGLE		product family QUICKIE	
ltr ecn nodr date		tolerances unless otherwise specified		linear		INCH/MM		title	
K		angles		XXX-01/XXX-03				HEADER, QUICKIE, SLIM LINE	
		±2"		XXX-005/XXX-013				VERTICAL, 4-WALL	
				XXX-0020/XXX-0051		scale 1:1		dwg no	
		dr		M. CLOUSER 7/11/90		FCI		sheet 7 of 10	
		engr		M. SMYK 7/11/90				size	
		chr		M. SMYK 8/21/91				A3	
		appd		M. SMYK 8/21/91				type Product Customer Drawing	
sheet index		revision sheet							

1

2 3

4

5

6

PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
88880-307	2 X 5	B	. 400/10. 16	. 097/2. 46	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2
-308	2 X 5	B	. 400/10. 16			
-309	2 X 7	C	. 600/15. 24			
-310	2 X 8	D	. 700/17. 78			
-311	2 X 10		. 900/22. 86			
-312	2 X 12		1. 100/27. 94			
-313	2 X 13		1. 200/30. 48			
-314	2 X 15		1. 400/35. 56			
-315	2 X 17		1. 600/40. 64			
-316	2 X 20		1. 900/48. 26			
-317	2 X 22		2. 100/53. 34			
-318	2 X 25		2. 400/60. 96			
-319	2 X 30		2. 900/73. 66	. 097/2. 46		
-320	2 X 8		. 700/17. 78	. 105/2. 67		
-321	2 X 25		2. 400/60. 96		30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-322	2 X 8		. 700/17. 78		50u" /1. 27u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-323	2 X 17		1. 600/40. 64	. 105/2. 67	50u" /1. 27u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-324	2 X 25		2. 400/60. 96	. 120/3. 05	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-325	2 X 25		2. 400/60. 96	. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-326	2 X 10		. 900/22. 86	. 120/3. 05	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-327	2 X 17		1. 600/40. 64	. 120/3. 05	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-328	2 X 25		2. 400/60. 96	. 120/3. 05	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-329	2 X 13		1. 200/30. 48	. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-330	2 X 25		2. 400/60. 96		15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-331	2 X 30		2. 900/73. 66		15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-332	2 X 17		1. 600/40. 64		15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-333	2 X 20		1. 900/48. 26	. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-334	2 X 10		. 900/22. 86	. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-335	2 X 20		1. 900/48. 26	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-336	2 X 22	D	2. 100/53. 34	. 105/2. 67	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-337	2 X 12	D	1. 100/27. 94	. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-338	2 X 5	B	. 400/10. 16	. 150/3. 81	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
-339	2 X 4	B	. 300/7. 62	. 105/2. 67	15u" /0. 38u MIN (NOTE 16) OVER 50u" /1. 27u Ni	
88880-340	2 X 10	D	. 900/22. 86	. 150/3. 81	30u" /0. 76u MIN (NOTE 16) OVER 50u" /1. 27u Ni	NOTE 2

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family QUICKIE	
ltr ecn nodr date		tolerances unless otherwise specified		title		dwg no		shee 8 of 10 size	
K		angles	linear	88880-005/88880-13		88880		A3	
		±2°		88880-0020/88880-051					
		dr	M. CLOUSER	7/11/90					
		engr	M. SMYK	7/11/90					
		chr	M. SMYK	8/21/91					
		appd	M. SMYK	8/21/91					
sheet index		revision sheet							

1

2 3

4

5

6

PRODUCT NO.	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL
NOTE 8 & 9						
88880-341	2 X 17	D	1.600/40.64	.150/3.81	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-342	2 X 10	D	.900/22.86	.150/3.81	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-343	2 X 17	D	1.600/40.64	.150/3.81	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-344	U N A S S I G N E D					
-345	2 X 20	D	1.900/48.26	.120/3.05	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-346	U N A S S I G N E D					
-347	U N A S S I G N E D					
-348	2 X 5	B	.400/10.16	.105/2.67	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-349	2 X 7	C	.600/15.24			
-350	2 X 8	D	.700/17.78			
-351	2 X 10		.900/22.86			
-352	2 X 13		1.200/30.48			
-353	2 X 17		1.600/40.64			
-354	2 X 20		1.900/48.26			
-355	2 X 22		2.100/53.34			
-356	2 X 25		2.400/60.96			
-357	2 X 30		2.900/73.66	.105/2.67	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	
-358	2 X 10		.900/22.86	.150/3.81	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	
-359	2 X 17		1.600/40.64	.150/3.81	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	
-360	2 X 12	D	1.100/27.94	.295/7.49	15u"/0.38u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-361	U N A S S I G N E D					
-362	2 X 5	B	.400/10.16	.105/2.67	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2
-363	2 X 8	D	.700/17.78			
-364	2 X 10	D	.900/22.86			
-365	2 X 15	D	1.400/35.56			
-366	2 X 17	D	1.600/40.64	.105/2.67		
-367	2 X 5	B	.400/10.16	.150/3.81		
-368	2 X 17	D	1.600/40.64	.150/3.81		
88880-369	2 X 25	D	2.400/60.96	.150/3.81	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE	
ltr ecn nopr date		tolerances unless otherwise specified		linear XXX±.01/XXX.3 XXX±.005/XXX.13 XXX±.0020/XXX±0.051		INCH/MM		title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL	
K		angles ±2°		dr M. CLOUSER 7/11/90		scale 1:1		dwg no 88880	
				engr M. SMYK 7/11/90				shee 9 of 10 size A3	
				chr M. SMYK 8/21/91					
				appd M. SMYK 8/21/91				type Product Customer Drawing	
sheet index		revision sheet							



FCIconnect.com

Copyright FCI

PRODUCT NO.	SIZE	STYLE	DIM C	DIM J	PIN PLATING	PLASTIC MATERIAL	POLARIZED PIN
88880-404	2 X 20	D	1.900/48.26	.120/3.05	15μ/0.38μm MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2	20
↑ -410	2 X 25	↑	2.400/60.96	↑	↑	↑	—
↑ -418	2 X 10	↑	.900/22.86	↑	↑	↑	14
↑ -423	2 X 25	↓	2.400/60.96	↑	↑	↑	25
↑ -426	2 X 17	D	1.600/40.64	↓	↓	↓	3
88880-427	2 X 5	B	.400/10.16	.120/3.05	15μ/0.38μm MIN (NOTE 16) OVER 50u"/1.27u Ni	↓	1
88880-428	2 X 5	B	.400/10.16	.150/3.81	30u"/0.76u MIN (NOTE 16) OVER 50u"/1.27u Ni	NOTE 2	10

mat'l. code			surface	tolerance	projection	product family		
			ISO 1302 ✓	ISO 406 ISO 1101		QUICKIE		
ltr	ecn	ndr	date	tolerances unless otherwise specified		title		
K				angles	linear	INCH/MM		
				±2°				
				dr	M. CLOUSER	7/11/90	scale 1:1	
				engr	M. SMYK	7/11/90		
				chr	M. SMYK	8/21/91		
				appd	M. SMYK	8/21/91	dwg no	
sheet		revision					sheet 10 of 10	
index	sheet						88880	
							type Product Customer Drawing	
							size A3	