




REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
S3	REVISED PER ECR-17-008392		28JUN2017	BW

D


C

B


A

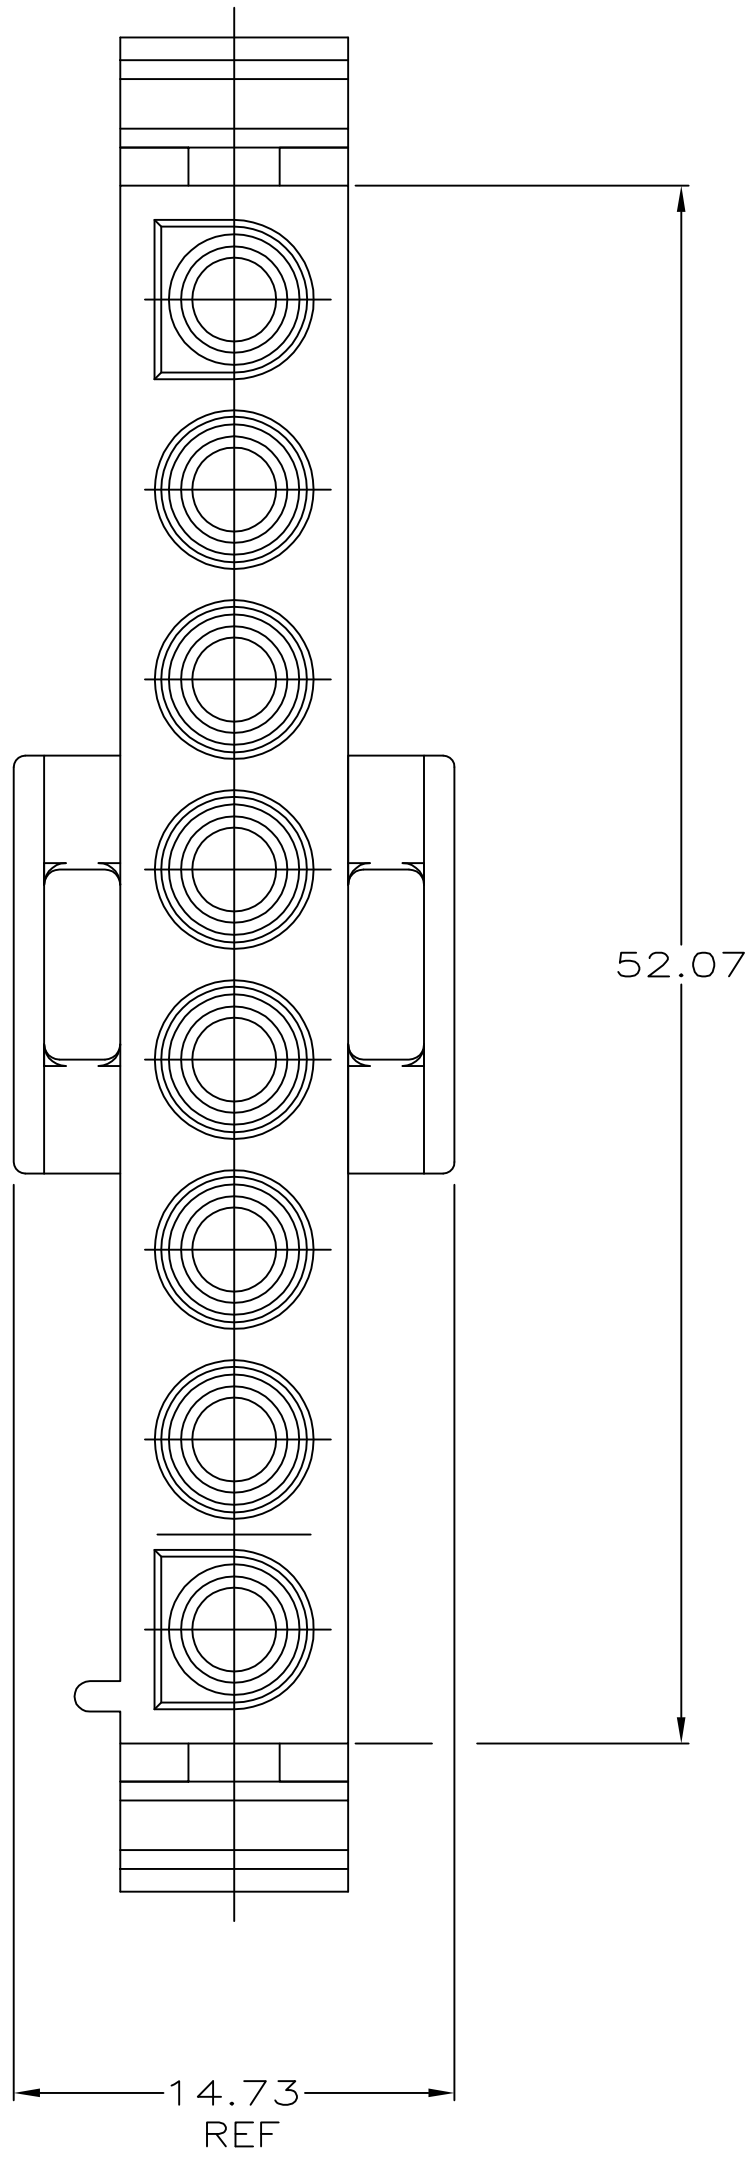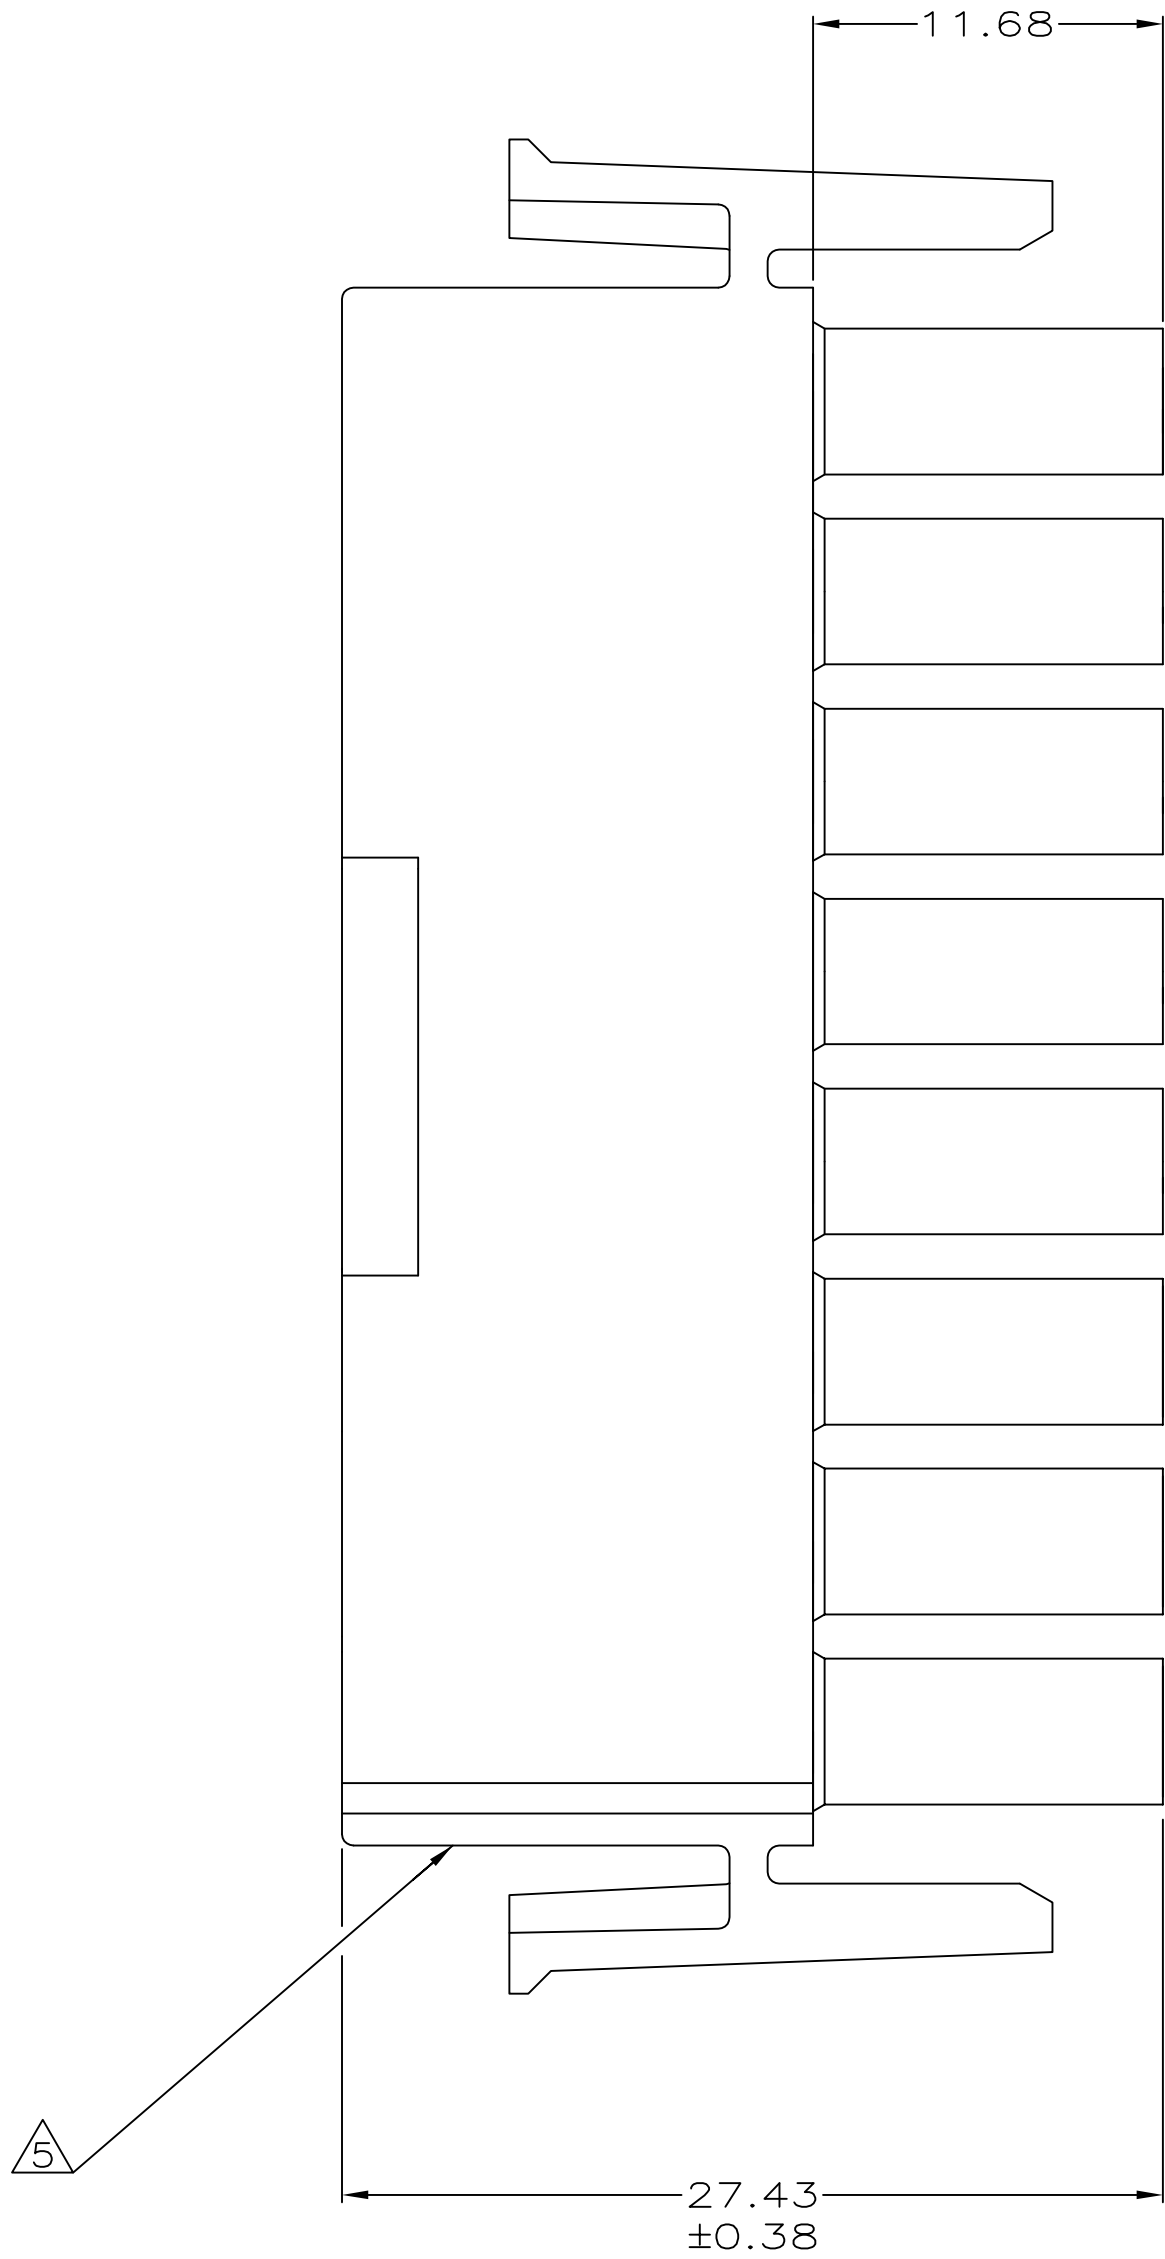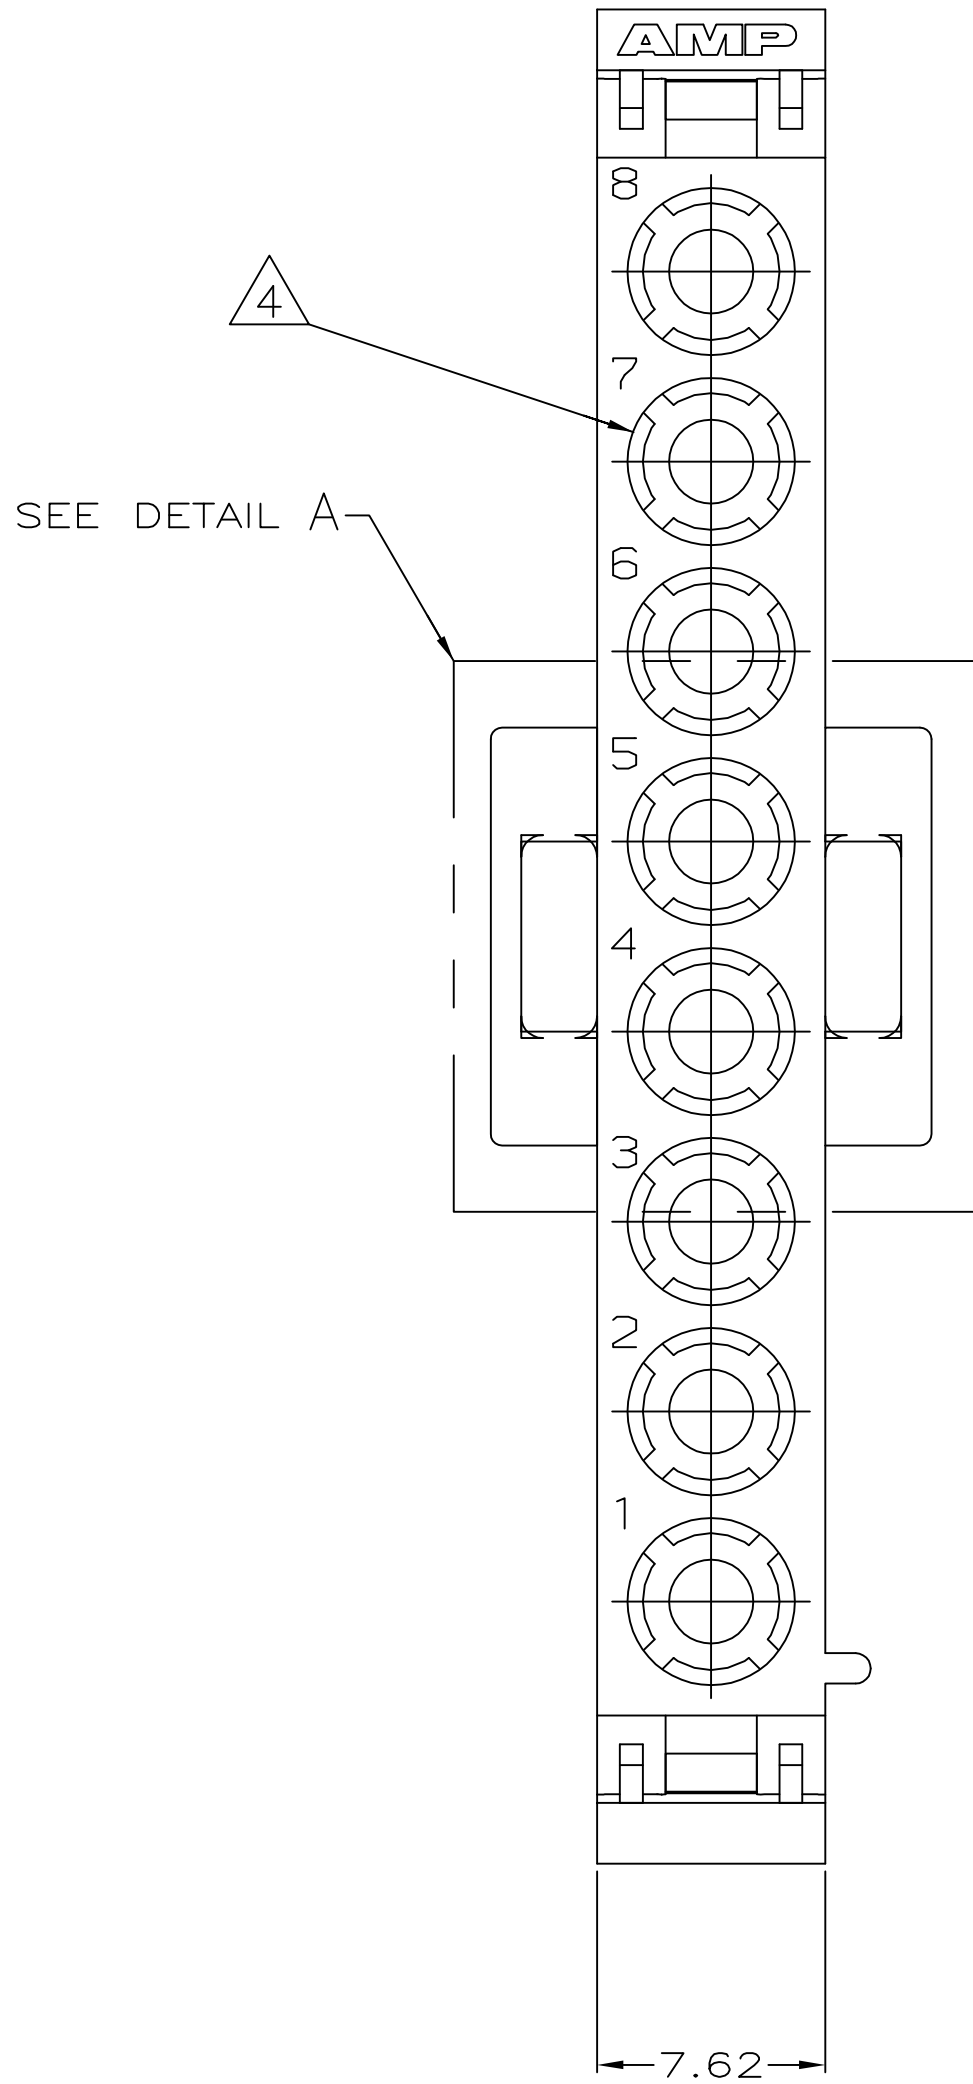


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
6. PRELIMINARY PART. NOT RELEASED FOR PRODUCTION.

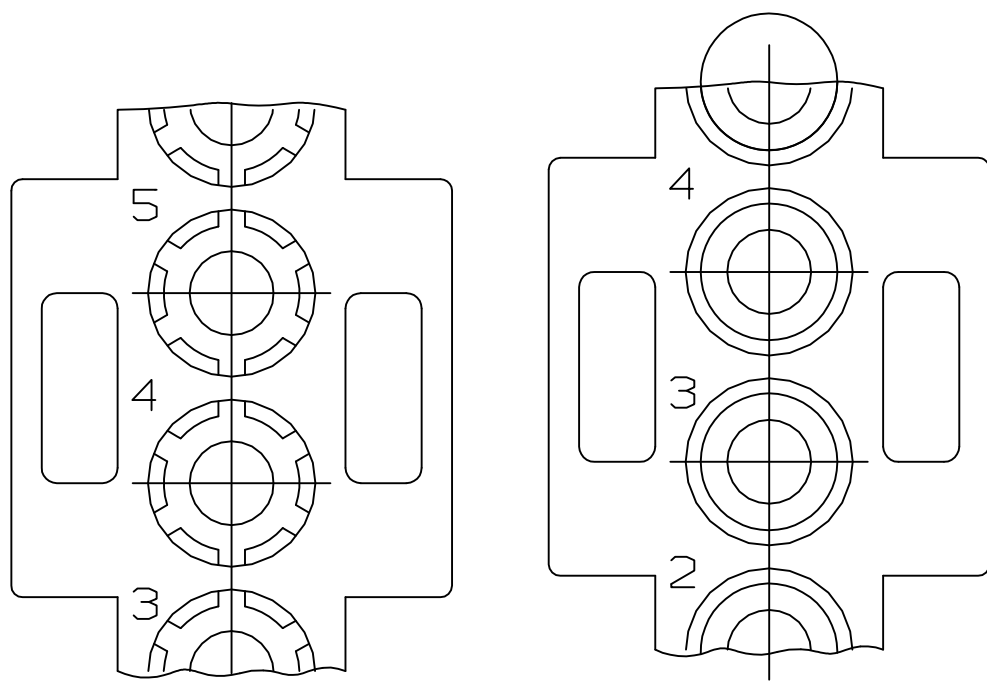

DETAIL A  
OPTIONAL CONSTRUCTIONS

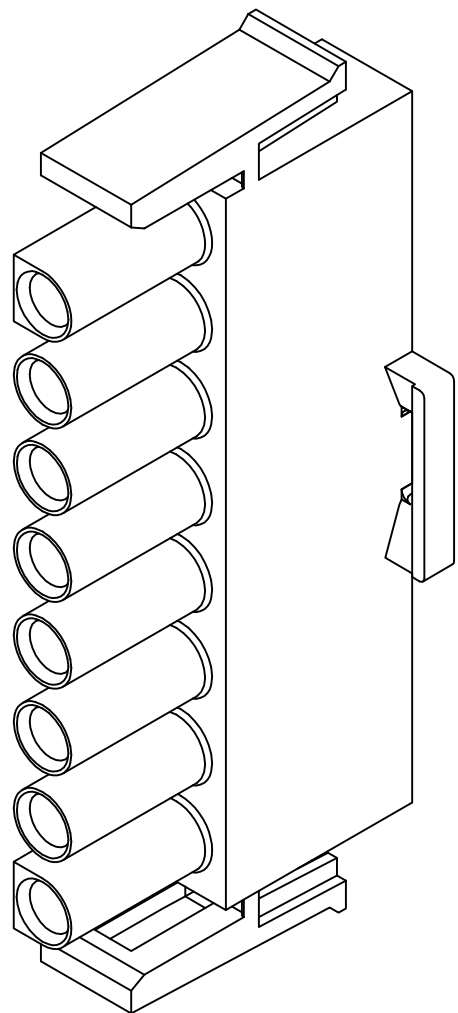

3-DIMENSIONAL MODEL  
NTS

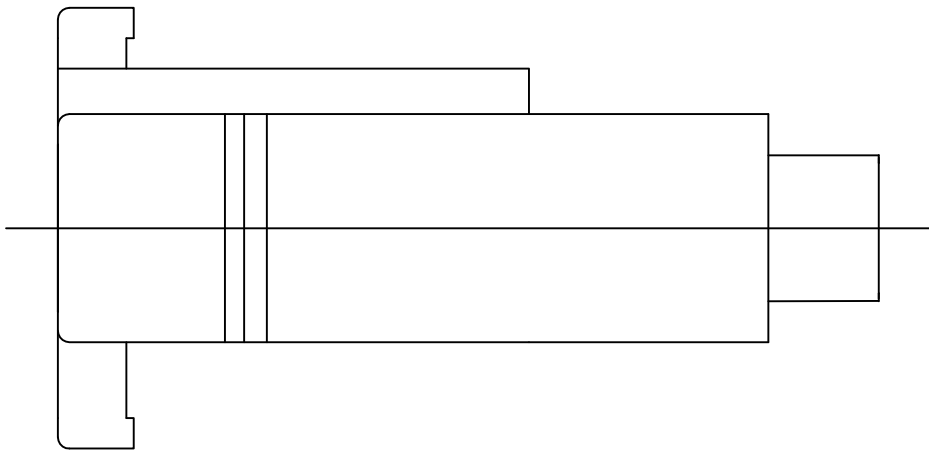

52.07	2.050
27.43	1.080
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm(INCHES)

MATERIAL  
NYLON,UL 94V-0

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
0 PLC ± -  
1 PLC ± -  
2 PLC ± 0.13  
3 PLC ± -  
4 PLC ± -  
ANGLES ± 0° 30'  
FINISH -

OWN  
K. WHITAKER  
CHK  
P. SWING  
APVD  
D. SELF  
PRODUCT SPEC:  
108-1031  
APPLICATION SPEC:  
114-1010  
WEIGHT  
0.000000  
CUSTOMER DRAWING

2-28-92  
2-28-92  
3-5-92  
NAME  
PLUG,  
8 CIRCUIT,  
UNIVERSAL MATE-N-LOK™  
SIZE  
CAGE CODE  
DRAWING NO  
00779  
SCALE  
4:1

RESTRICTED TO  
-

SHEET  
1  
OF  
1  
REV  
S3

RED  
WHITE  
COLOR

640582-2  
640582-1  
PART NO

STE

TE Connectivity

4805 (1/15)