


Surface Mount LC Filters

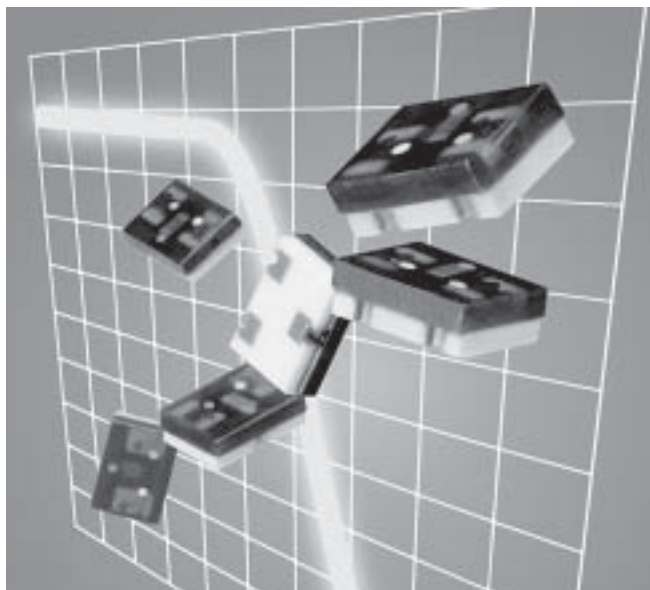

These space saving low and high pass filters are pre-tuned, tight tolerance modules which serve a wide variety of filtering requirements.

They feature 3rd order Butterworth alignment, less than 0.3 dB insertion loss and a compact, 1812-size construction ideally suited for auto insertion and reflow soldering.

- 3rd order Butterworth alignment
- 50 Ohm characteristic impedance
- Less than 0.3 dB insertion loss

Coilcraft **Designer's Kit D102** contains samples of all low pass filters. To order, contact Coilcraft or visit <http://order.coilcraft.com>.

S-Parameter files
ON OUR WEB SITE OR CD

PSpice models
SEE CATALOG, WEB SITE OR CD



Low Pass Filters

Part number	-3 dB Cutoff	Irms (mA) ¹
S3LP156	15 MHz	200
S3LP306	30 MHz	300
S3LP606	60 MHz	300
S3LP157	150 MHz	400
S3LP307	300 MHz	400
S3LP507	500 MHz	500
S3LP707	700 MHz	500
S3LP807	800 MHz	500
S3LP907	900 MHz	500
S3LP108	1.0 GHz	500
S3LP128	1.2 GHz	500
S3LP158	1.5 GHz	500
S3LP188	1.8 GHz	500
S3LP218	2.1 GHz	500



High Pass Filters

Part number	-3 dB Cutoff	Irms (mA) ¹
S3HP156	15 MHz	300
S3HP306	30 MHz	300
S3HP606	60 MHz	300
S3HP157	150 MHz	300
S3HP307	300 MHz	300
S3HP507	500 MHz	500
S3HP807	800 MHz	500

1. Average current for a 15°C rise above 25°C ambient.
2. Operating temperature range -40°C to +85°C.
3. Electrical specifications at 25°C.

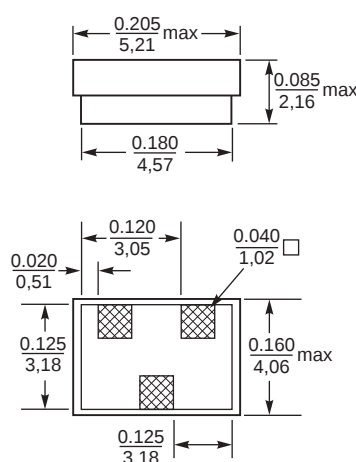

Alternate marking

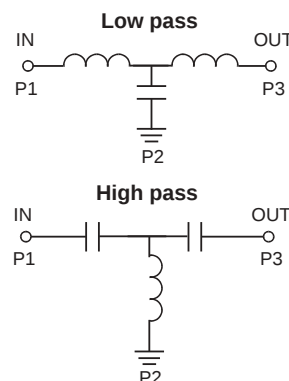

Parts/reel: 7 600, 13 2,200 Tape width: 12 mm
For packaging data see Tape and Reel Specifications section.

Coilcraft[®]





Specifications subject to change without notice. Document 124-1 Revised 10/17/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469



E-mail info@coilcraft.com Web <http://www.coilcraft.com>

Surface Mount LC Filters

Frequency Response—Low Pass Filters*

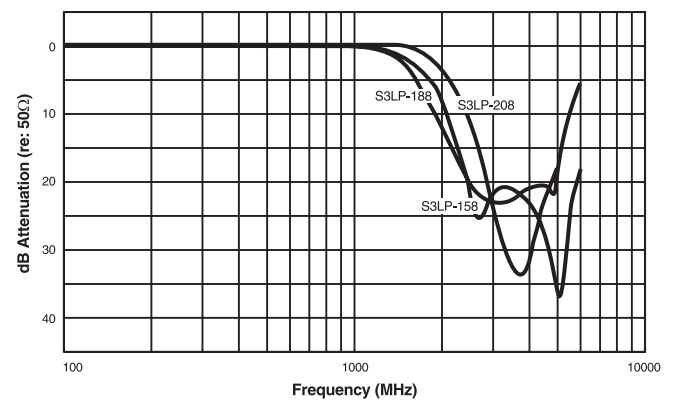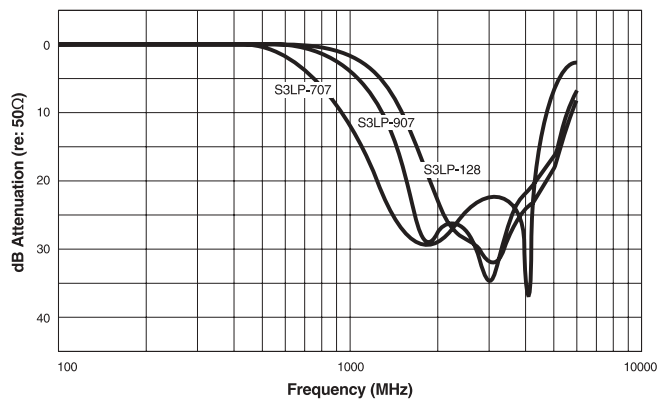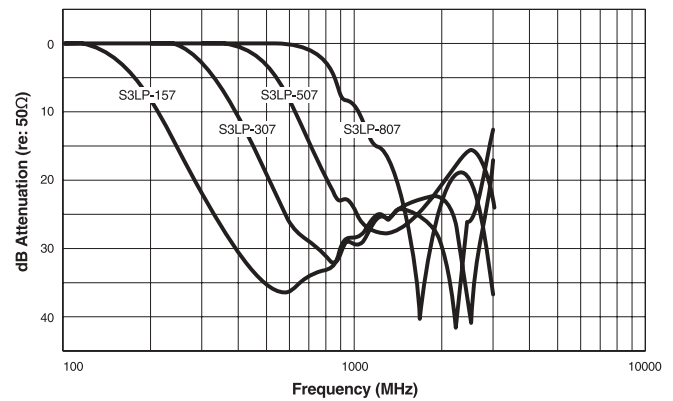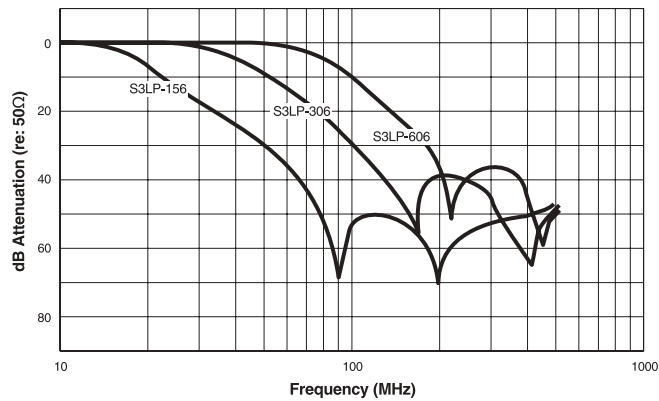

Frequency Response—High Pass Filters*

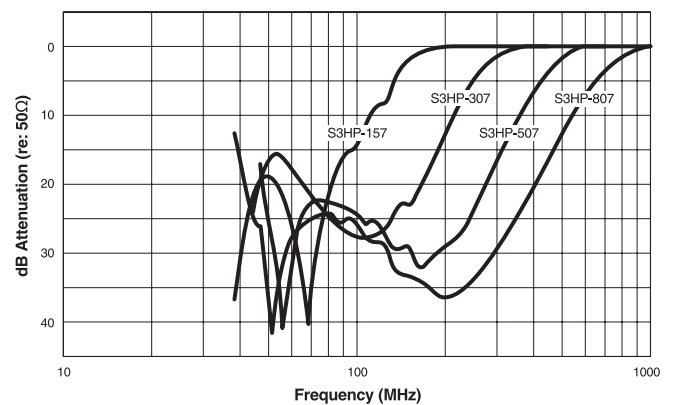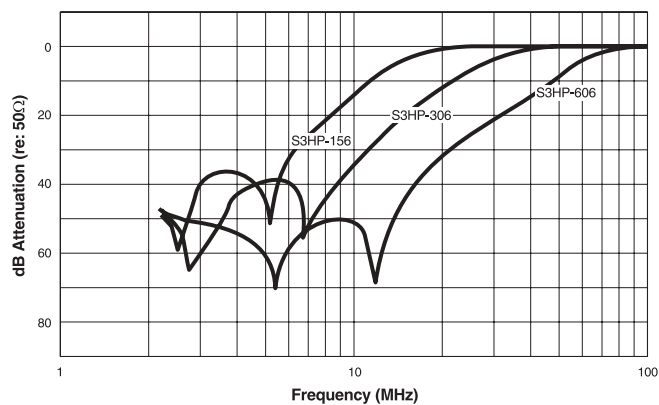

*Measured on Agilent/HP8753D network analyzer

Coilcraft®

Specifications subject to change without notice. Document 124-2 Revised 6/3/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>