



Typical Applications

Central door lock, Anti-theft lock, Power doors & windows, Turning lamp, dangerous signal & scram lamp control, Seat adjustment, Audio system, Air-conditioning, Fuel pump control, Low temperature control, Rear window defoggers, Sunroof motor control, Starter solenoid switches

Features

- 45A switching capability
- PCB terminals
- Two pin layout choices
- 1 Form A & 1 Form C contact arrangement
- Unenclosed and plastic sealed types available
- RoHS & ELV compliant

CHARACTERISTICS

Contact arrangement	1A, 1C	Ambient temperature	-40°C to 125°C
Voltage drop (initial) ¹⁾	NO:Typ.20mV,250mV max.(at 10A) NC:Typ.30mV,250mV max.(at 10A)	Vibration resistance ^{7) 9)}	10Hz to 40Hz 1.27mm DA 40Hz to 70Hz 49m/s ² 70Hz to 100Hz 0.5mm DA 100Hz to 500Hz 98m/s ²
Max. continuous current ^{2) 9)}	30A (at 85°C, 8h)	Shock resistance ^{7) 9)}	98m/s ²
Max. switching current ^{3) 9)}	Make: 100A (Lamp, Inrush current) Break: 60A (Resistive)	Termination	PCB ⁸⁾
Max. switching voltage ⁴⁾	75VDC	Construction	Plastic sealed, Unenclosed
Min.contact load	1A 6VDC	Unit weight	Unenclosed: Approx. 16g Plastic sealed: Approx. 20g
Electrical endurance	See "CONTACT DATA"		
Mechanical endurance	1x10 ⁷ OPS (300OPS/min)		
Initial insulation resistance	500MΩ (at 500VDC)		
Dielectric strength ⁵⁾	between contacts: 500VAC between coil & contacts: 500VAC		
Operate time ⁹⁾	Typ.: 5ms Max.: 10ms (at nomi. vol.)		
Release time ^{6) 9)}	Typ.: 3ms Max.: 10ms		

- 1) Equivalent to the max. initial contact resistance is 100mΩ (at 1A 6VDC).
 2) For NO contacts, measured when applying 100% rated voltage on coil.
 3) For NO contacts, at 23°C, 13.5VDC, resistive load (100 cycles).
 4) For NO contacts, see "Load limit curve" for details.
 5) 1min, leakage current less than 1mA.
 6) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.
 7) When energized, opening time of NO contacts shall not exceed 100μs, when non-energized, opening time of NC contacts shall not exceed 1ms, meantime, NO contacts shall not be closed.
 8) Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is (250±3)°C, (5±0.3)s.
 9) Only for the 12VDC coil voltage type.

CONTACT DATA ³⁾

at 23°C

Load voltage	Load type		Load current A			On/Off ratio		Electrical endurance	Contact material	Load wiring diagram ²⁾
			1C		1A	On s	Off s			
			NO	NC	NO					
13.5VDC	Resistive	Make	45	30	45	1.5	1.5	1×10 ⁵ OPS	AgSnO ₂	See diagram 1
		Break	45	30	45					
	Flasher ¹⁾		2×21W+5W	---	2×21W+5W	0.375	0.375	1000h	Special AgSnO ₂	See diagram 2
			4×21W+2×5W	---	4×21W+2×5W	0.375	0.375	360h		



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2014 Rev. 1.01

- 1) When it is utilized in flasher, a special AgSnO₂ contact material should be used and the customer special code should be (170) as a suffix. Please connect by the polarity according to the diagram below.
- 2) The load wiring diagrams are listed below:

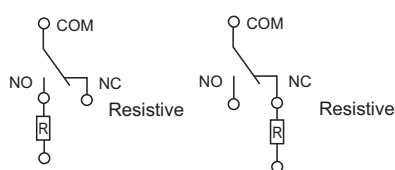


diagram 1




diagram 2

- 3) When the load voltage is at 24VDC or higher, or the applications conditions are different from the table above, please submit the detailed application conditions to Hongfa to get more support.

COIL DATA

at 23°C

	Nominal voltage VDC	Pick-up voltage VDC max.	Drop-out voltage VDC min.	Coil resistance x(1±10%)Ω	Power consumption W	Max. allowable overdrive voltage ¹⁾ VDC	
						at 23°C	at 85°C
Standard	6	3.3	0.6	19	1.9	9.0	6.5
	12	6.8	1.2	90	1.6	19.6	14.3
	24	13.9	2.4	362	1.6	39.3	28.6
Sensitive	6	4.5	0.6	30	1.2	11.0	8.0
	12	9.0	1.2	120	1.2	22.1	16.0
	24	19.2	2.4	480	1.2	44.3	30.0

1) Max. allowable overdrive voltage is stated with no load applied, illustrated with open version.

ORDERING INFORMATION



Type		HFKP /		012		-1H		1		T		S		(XXX)	
Coil voltage		006: 6VDC		012: 12VDC		024: 24VDC									
Contact arrangement		1H: 1 Form A		1Z: 1 Form C											
Version ¹⁾		1: U.S.A. Unenclosed model		2: U.S.A. Plastic sealed model		3: European Unenclosed model		4: European Plastic sealed model		5: U.S.A. Plastic sealed model, 3 yoke terminals		6: European Plastic sealed model, 3 yoke terminals			
Contact Material		T: AgSnO ₂													
Coil Power		S: Sensitive		Nil: Standard											
Customer special code		e.g. (170) stands for flasher load													

1) For unenclosed type, because there is no cover protection, the products may be contaminated by particles during transportation, assembly or usage which may cause relay failure. So the products should be effectively protected at customer side. Hongfa suggest to use sealed type if no other special requirements.



2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.

Outline Dimensions



HFKP/11111-111111(XXX)





HFKP/11111-112111(XXX)



HFKP/11111-113111(XXX)





HFKP/11111-114111(XXX)





Outline Dimensions

HFKP/11111-115111(XXX)




HFKP/11111-116111(XXX)




PCB Layout (Bottom view)


HFKP/11111-111111(XXX)




HFKP/11111-112111(XXX)




HFKP/11111-113111(XXX)

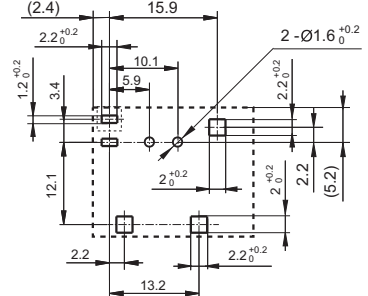


HFKP/11111-114111(XXX)

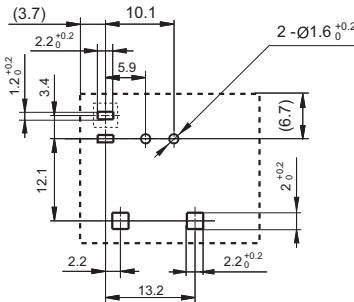

HFKP/11111-115111(XXX)



HFKP/11111-116111(XXX)

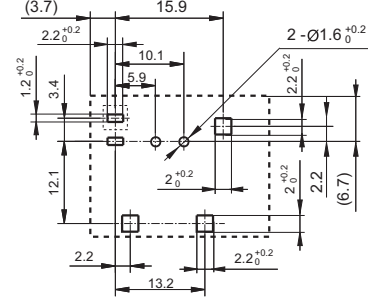

Remark: 1) * The additional tin top is max. 1mm.

2) The tolerance without indicating is always ± 0.1 mm.


3) □ means that the mounting hole doesn't exist for HFKP/□□□-1H□□□(XXX) type.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Wiring Diagram (Bottom view)


HFKP/11111-1H1111(XXX)
HFKP/11111-1H3111(XXX)
HFKP/11111-1H5111(XXX)
HFKP/11111-1H6111(XXX)




HFKP/11111-1Z1111(XXX)
HFKP/11111-1Z3111(XXX)
HFKP/11111-1Z5111(XXX)
HFKP/11111-1Z6111(XXX)



HFKP/11111-1H2111(XXX)
HFKP/11111-1H4111(XXX)




HFKP/11111-1Z2111(XXX)
HFKP/11111-1Z4111(XXX)



CHARACTERISTIC CURVES


1. Coil operating voltage range

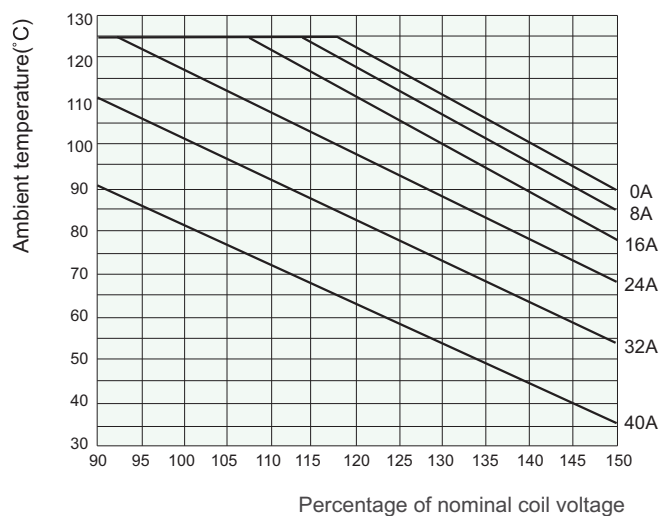

- 1) This chart takes sensitive unenclosed version as example.
- 2) The maximum allowable coil temperature is 180°C. For the coil temperature rise which is measured by resistance is average value, we recommend the coil temperature should be below 170°C under the different application ambient, different coil voltage and different load etc.
- 3) If the actual operating coil voltage is out of the specified range, please contact Hongfa for further details.

CHARACTERISTIC CURVES

2. Load limit curve (at 23°C)

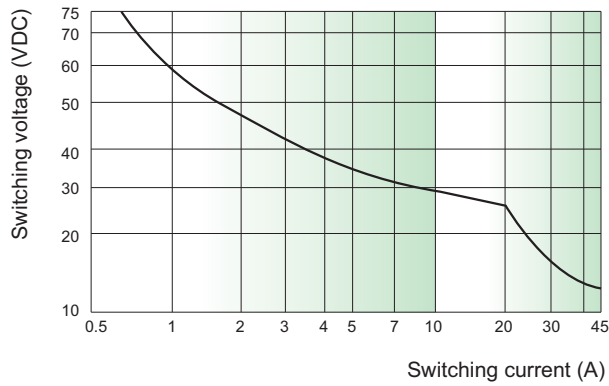

- 1) This chart takes NO contact, Resistive load as example.
- 2) The load and electrical endurance tests are made according to "CONTACT DATA" parameters' table. If actual load voltage, current, operate frequency, or ambient temperature is different from "CONTACT DATA" table, please arrange corresponding tests for confirmation.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.