

TG/LTG-Series



The TG-Series Mini Tippette rocker switches are single or double pole and feature an all nylon double-insulated construction. These switches are designed with snap-in mounting for fast, low cost assembly. The illuminated version (LTG) is available with either a paddle or rocker actuator. These AC rated switches are also suitable for low-voltage DC applications.

- Specifications
- Certifications*: UL, CSA, VDE
 - Dielectric Strength: 1,000 V (minimum)
 - Insulation Resistance: 100 Megohms (minimum)
 - Base Material: Nylon
 - Actuator Material: Nylon or Polycarbonate
 - Bezel Material: Nylon

* Due to ongoing technological advances, consult factory for certification specifics.


Dimensional Specifications: in. [mm]



LTG		G	O	50	1	-	T	B	-	B	-	R	/	125N			
SERIES		RATING			ACTUATOR STYLE		ACTUATOR COLOR ²			BASE COLOR ²							
TG	DOUBLE POLE NON-LIGHTED	40	5A 250VAC 10A 125VAC	1/2HP 125-250VAC	P	PADDLE	B	BLACK	B	BLACK	LENS COLOR ³						
LTG	DOUBLE POLE W/INDICATOR LIGHTS	41	5A 250VAC 10A 125VAC	10(4)A 250VAC μ	T	ROCKER	W	WHITE	W	WHITE							
CIRCUIT ¹		TERMINATION/FUNCTION			FUNCTION		.250 SOLDER TAB LUG	.187 TAB (QC)	WIRE LEAD	LAMP VOLTAGE							
See Circuit Designation Chart Page 39		50	10A 250VAC 15A 125VAC 3/4HP 125-250VAC														
		51	10A 250VAC 15A 125VAC				0	1	3	5	6V	6 VOLT/ INCANDESCENT					
							A	B	D	F	12V	12 VOLT/ INCANDESCENT					
							L	M	R	T	18V	18 VOLT/ INCANDESCENT					
CENTER POSITION					ON-NONE-ON		0	1	3	5	24V	24 VOLT/ INCANDESCENT					
C	CENTER OFF THREE POSITION				ON-NONE-(OFF)		A	B	D	F	28V	28 VOLT/ INCANDESCENT					
O	NO CENTER OFF TWO POSITION				ON-NONE-(ON)		A	B	D	F	125N	125 VOLT/ NEON					
					ON-OFF-ON		0	1	3	5	250N	250 VOLT/ NEON					

NOTES:
Shading indicates standard configurations.
Imprinting is available. Please specify when ordering.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in

Circuit Designation Chart - refers to TG/LTG, TTG and TLG-Series Switches pages 36-38

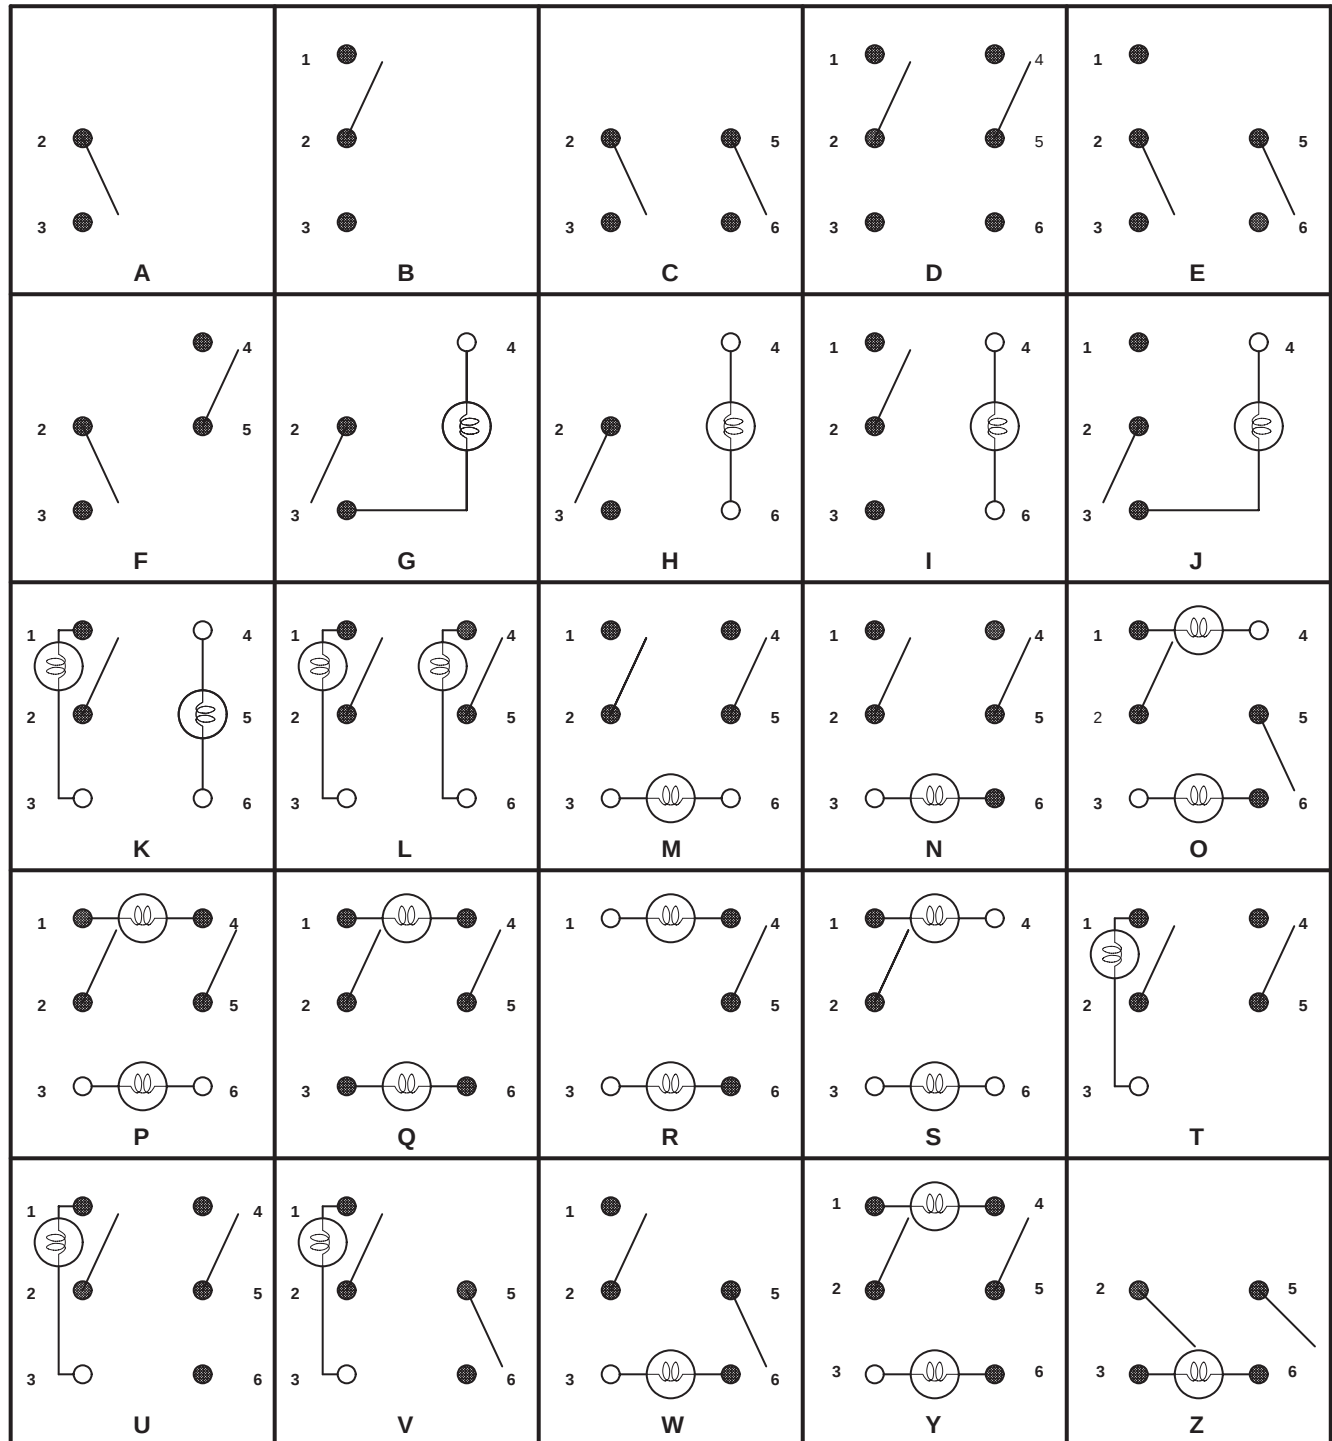

● CONTACT TERMINAL
Will make contact with switching lever

● CONTACT TERMINAL AND SWITCH LEVER

○ ISOLATED TERMINAL
Does not make contact with switching lever

○ BULB

NOTES:
For variations to above circuits, consult factory.