

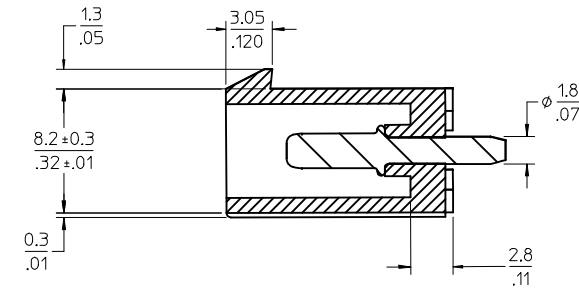
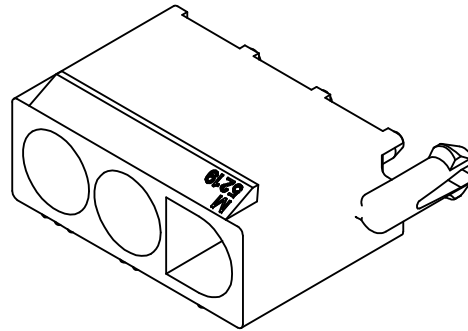




CIRCUITS	EDP NO.	ENG. NO.
3	39287038	5219-03A-201
	15311036	5219-03A

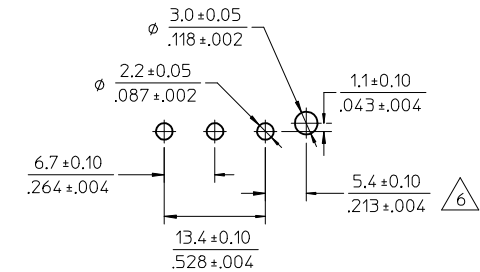

SECTION C-C

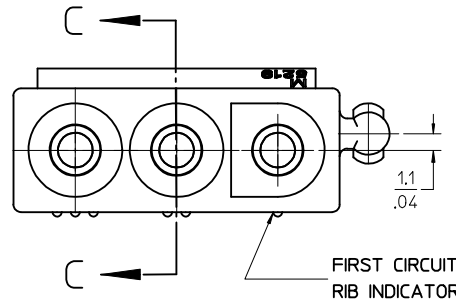

RECOMMENDED P.C. BOARD HOLE DIM.
SCALE 2:1

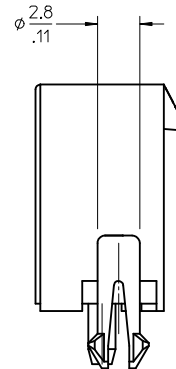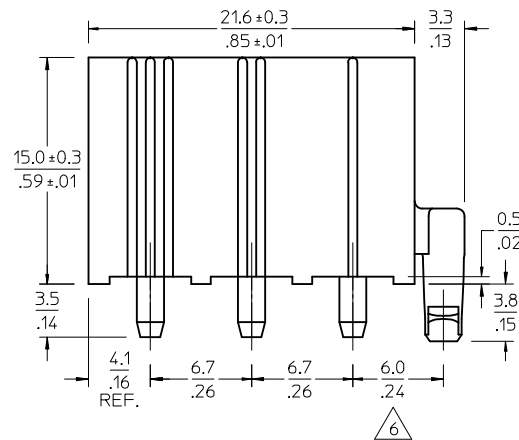

NOTES:

1) MATERIAL:

HOUSING: "BLANK" = NYLON 6/6, UL94V-2, COLOR: NATURAL

"201" = NYLON 6/6, UL94V-0, COLOR: NATURAL

TERMINAL: C2700W BRASS

2) FINISH: 0.000003/(.0000001) MIN. TIN OVERALL OVER

0.000001/(.00000004) MIN. NICKEL OVERALL

3) PRODUCT SPECIFICATION: PS-3191-003

4) PACKAGING: NONE


5) MATES WITH: 3191-03R SERIES

△ DIFFERENCE OF DIMENSION IS INTENTIONAL TO PREVENT PART RISING FROM P.C.B.

7) PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC

SPECIFICATION PS-45499-002.

8) ASSEMBLIES MAY CONTAIN SOLID OR SWAGED (HOLLOW) PINS.

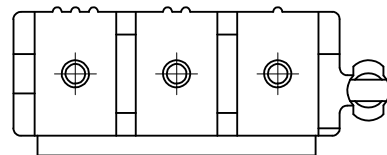

REVISE NOTE #6 EC NO: UCP2012-1165 DRWN: AELHAG 2012/06/13 CHKD: J.BELL 2012/06/13 APPR: FSMITH 2012/08/16 N3	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	NEW INTERNATIONAL CONN. HEADER AND ASSY. MOLEX INCORPORATED SD-5219-03A-*			
				mm	INCH	DRAWN BY TASAKAWA	DATE 1995/11/18	TITLE					
			4 PLACES	± ---	± ---	CHECKED BY HIRAMOT	DATE 1995/11/18						
			3 PLACES	± ---	± .005								
			2 PLACES	± 0.13	± .010								
			1 PLACE	± 0.25	± ---	APPROVED BY FUKUSHIM	DATE 1995/11/18						
			ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.	SHEET NO.				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		1 OF 1					
			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									