

Customer Information Sheet

DRAWING No.: M80-540XXX

SHEET 2 OF 2






IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

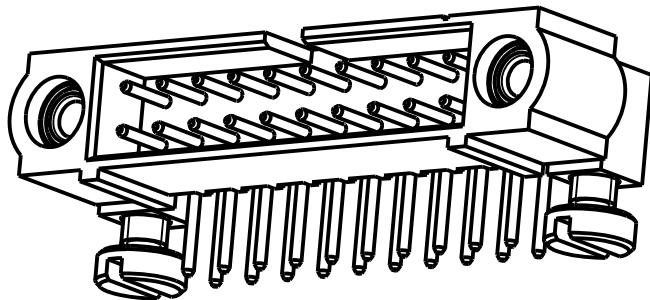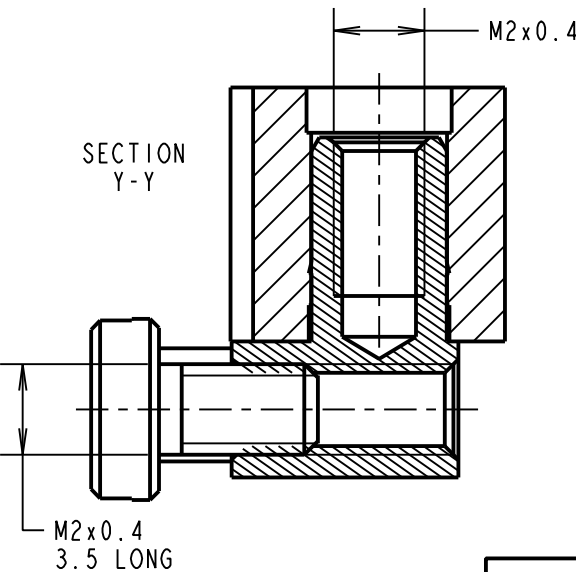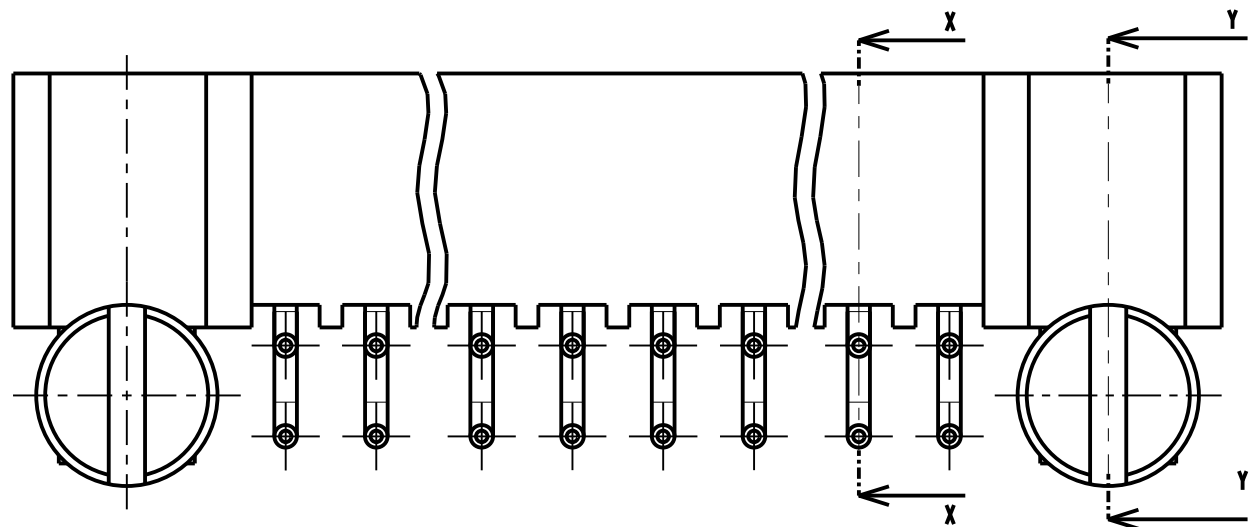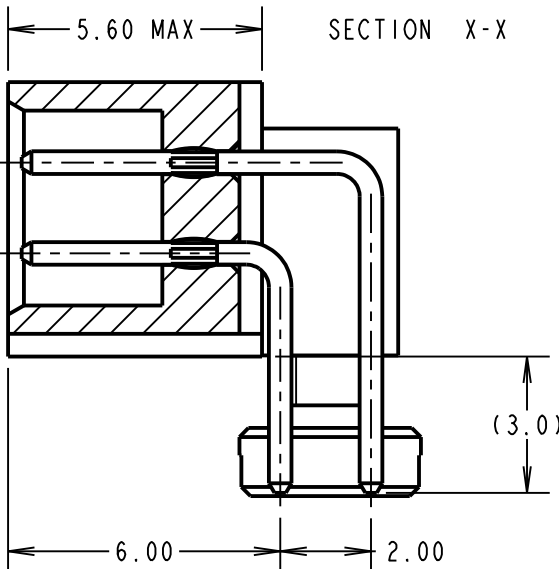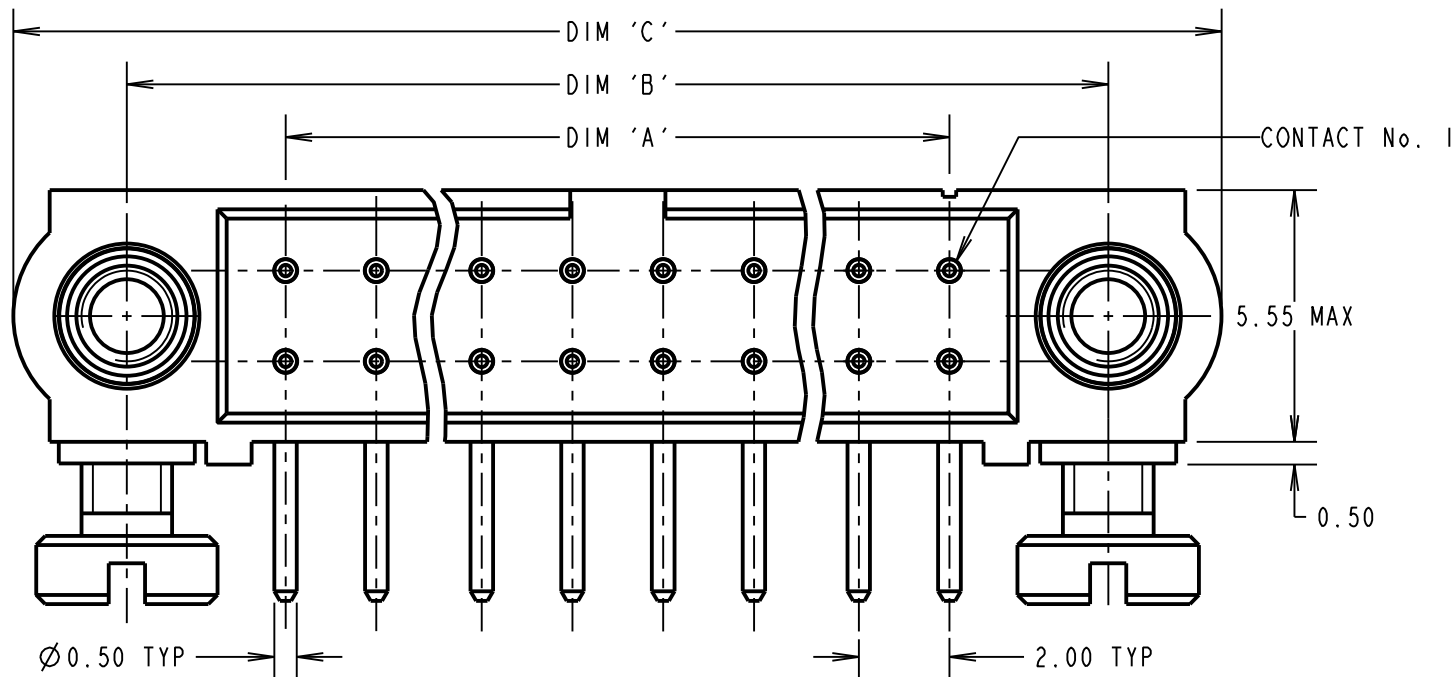

SPECIFICATIONS:

MATERIAL:

MOULDING = GLASS-FILLED PPS,

UL94V-0, BLACK

CONTACT = PHOSPHOR BRONZE

JACKSCREW = STAINLESS STEEL

FINISH (CONTACTS):

22 = 0.75μ GOLD ON CONTACT AREA,

3μ 90/10 TIN/LEAD ON TAILS

42 = 0.75μ GOLD ON CONTACT AREA,

3μ 100% TIN ON TAILS

05 = 0.75μ GOLD ALL OVER NICKEL

ELECTRICAL:

CURRENT RATING AT 25°C = 3.0A MAX

CURRENT RATING AT 85°C = 2.2A MAX

WORKING VOLTAGE = 800V AC/DC

VOLTAGE PROOF = 1200V AC/DC

CONTACT RESISTANCE = 25 mΩ MAX

INSULATION RESISTANCE = 100 MΩ MIN

MECHANICAL:

DURABILITY = 500 OPERATIONS

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PACKING: TUBE

FOR COMPLETE SPECIFICATION, SEE


COMPONENT SPECIFICATION C005XX

(LATEST ISSUE)

NOTES:

1. BOARD MOUNT SCREWS SUPPLIED LOOSE IN A BAG NOT AS SHOWN.

RECOMMENDED PCB LAYOUT

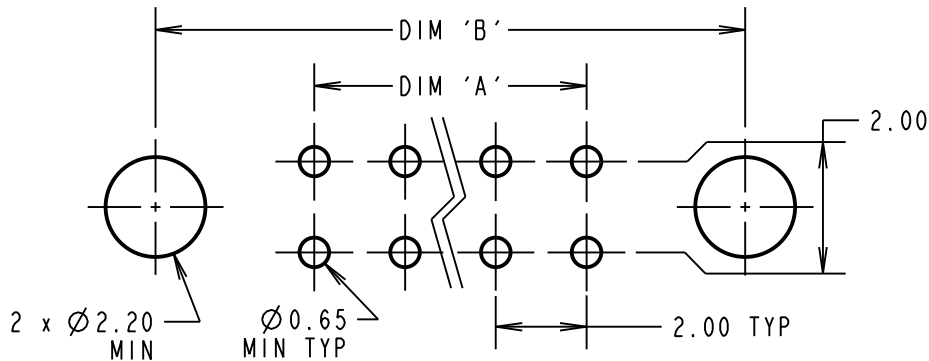

DIMENSION	CALCULATION
DIM 'A'	TOTAL No. OF CONTACTS - 2
DIM 'B'	TOTAL No. OF CONTACTS + 5
DIM 'C'	TOTAL No. OF CONTACTS + 10

ORDER CODE:

M80-540XXX

TOTAL No. OF CONTACTS

04 TO 50
(EVEN NUMBERS ONLY)

FINISH

22 - SELECTIVE GOLD + TIN/LEAD

42 - SELECTIVE GOLD + 100% TIN

05 - 0.75μ GOLD ALL OVER

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm

X.X = ±0.25mm

X.XX = ±0.10mm

X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE: DATAMATE J-TEK DIL
HORIZ 3.0mm PC TAIL MALE ASSY
WITH BOARD MOUNT

DRAWING NUMBER:

M80-540XXX

SHT

2

OF 2

SF	2	17.04.13	12012
NAME	ISS.	DATE	C/NOTE
APPROVED:	S.FLOWER		
CHECKED:	M.PLESTED		
DRAWN:	W. J. BOURNE		
CUSTOMER REF.:			
ASSEMBLY DRG:			