
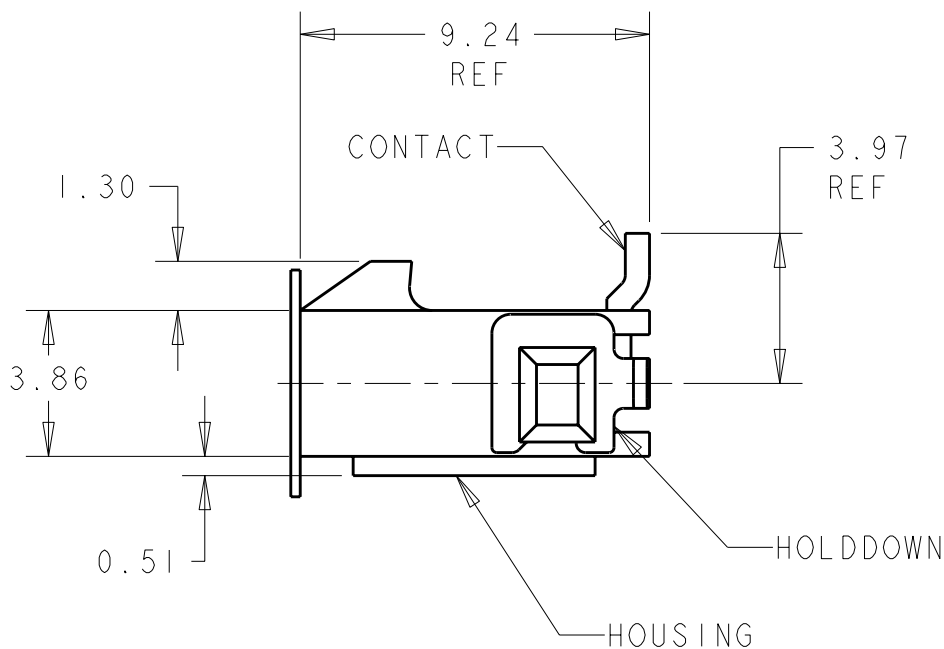


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		CI	REVISED PER ECO-11-005027	14MAR2011	RK	HMR

D

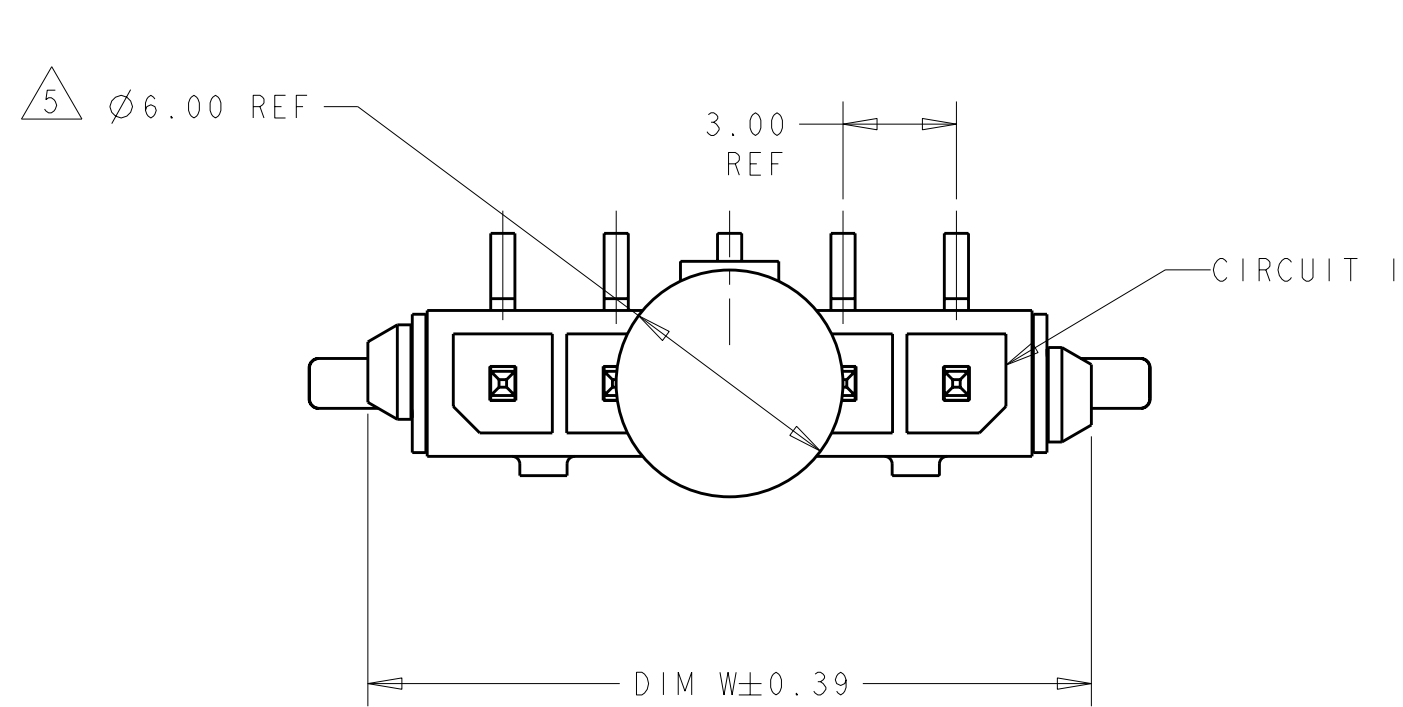

$\triangle 1$ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.



$\triangle 2$ PLATING: CONTACTS - $2.54\mu\text{m}$ MINIMUM TIN-LEAD OVER $1.27\mu\text{m}$ MINIMUM NICKEL.
HOLDDOWNS: $2.54\mu\text{m}$ MINIMUM TIN-LEAD OVER $1.27\mu\text{m}$ MINIMUM NICKEL.

$\triangle 4$ RECOMMENDED PC BOARD THICKNESS OF 1.57.

$\triangle 5$ KAPTON VACUUM PICK UP BUTTON.


$\triangle 6$ PLATING: CONTACTS - $2.54\mu\text{m}$ MINIMUM MATTE TIN OVER $1.27\mu\text{m}$ MINIMUM NICKEL.
HOLDDOWNS: $2.54\mu\text{m}$ MINIMUM MATTE TIN OVER $1.27\mu\text{m}$ MINIMUM NICKEL.

C

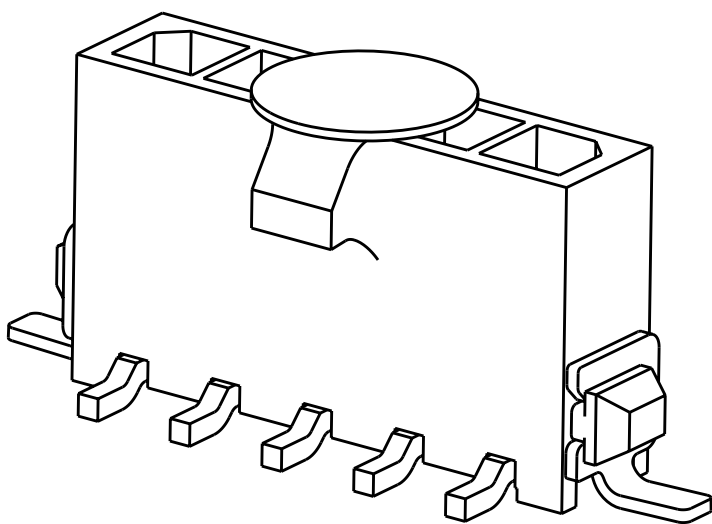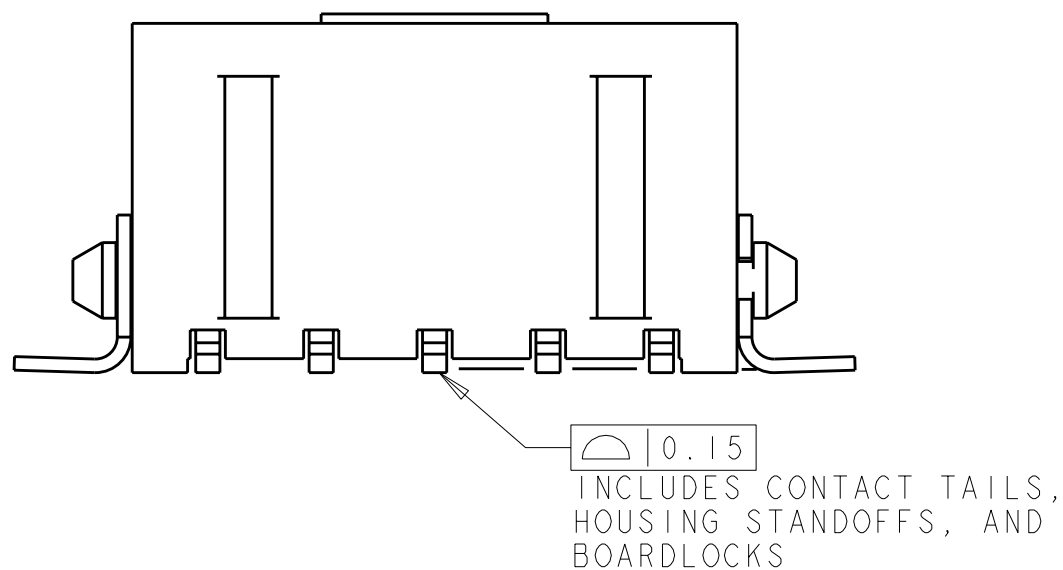


$\triangle 6$	33.00	40.41	40.00	12	3-1445053-2
$\triangle 6$	30.00	37.41	37.00	11	3-1445053-1
$\triangle 6$	27.00	34.41	34.00	10	3-1445053-0
$\triangle 6$	24.00	31.41	31.00	9	2-1445053-9
$\triangle 6$	21.00	28.41	28.00	8	2-1445053-8
$\triangle 6$	18.00	25.41	25.00	7	2-1445053-7
$\triangle 6$	15.00	22.41	22.00	6	2-1445053-6
$\triangle 6$	12.00	19.41	19.00	5	2-1445053-5
$\triangle 6$	9.00	16.41	16.00	4	2-1445053-4
$\triangle 6$	6.00	13.41	13.00	3	2-1445053-3
$\triangle 6$	3.00	10.41	10.00	2	2-1445053-2
$\triangle 2$	33.00	40.41	40.00	12	1-1445053-2
$\triangle 2$	30.00	37.41	37.00	11	1-1445053-1
$\triangle 2$	27.00	34.41	34.00	10	1-1445053-0
$\triangle 2$	24.00	31.41	31.00	9	1445053-9
$\triangle 2$	21.00	28.41	28.00	8	1445053-8
$\triangle 2$	18.00	25.41	25.00	7	1445053-7
$\triangle 2$	15.00	22.41	22.00	6	1445053-6
$\triangle 2$	12.00	19.41	19.00	5	1445053-5
$\triangle 2$	9.00	16.41	16.00	4	1445053-4
$\triangle 2$	6.00	13.41	13.00	3	1445053-3
$\triangle 2$	3.00	10.41	10.00	2	1445053-2
FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER

B

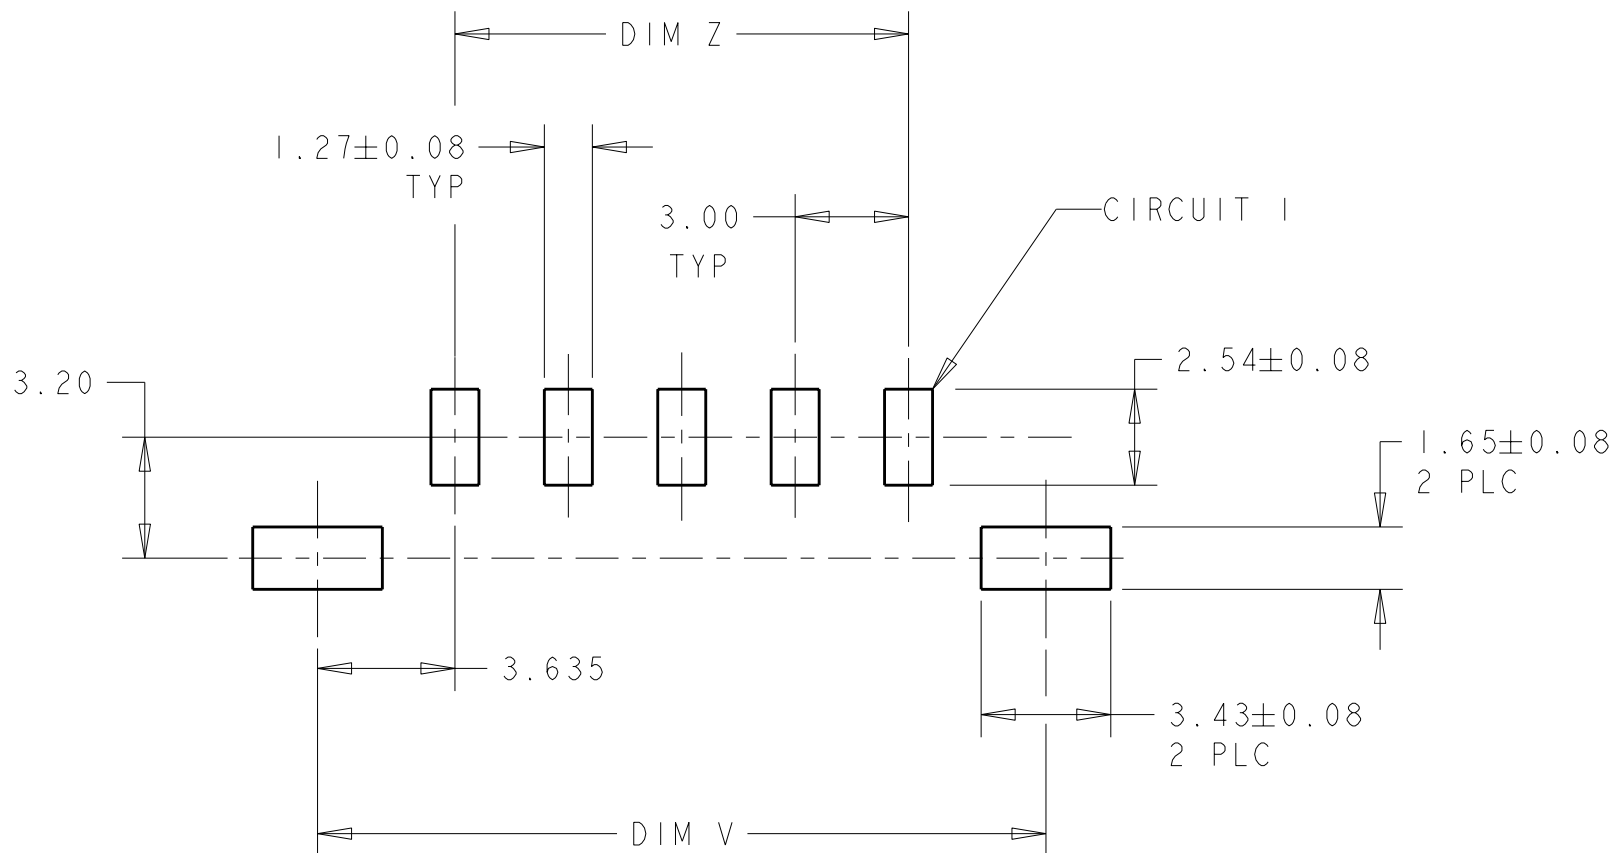

PCB LAYOUT COMPONENT SIDE $\triangle 4$

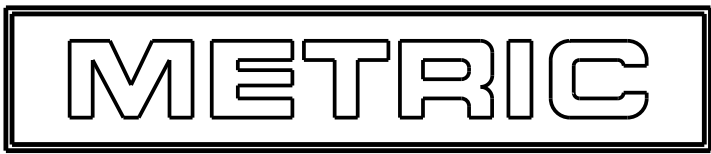

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 07OCT2000	TE Connectivity		
DIMENSIONS: mm		CHK K. WHITAKER 20-FEB-2001			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. JONES 20-FEB-2001	NAME VERTICAL SURFACE MOUNT HEADER ASSY, TIN CONTACTS, SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™		
0 PLC ±		PRODUCT SPEC			
1 PLC ±		APPLICATION SPEC	SIZE A200779 CAGE CODE C-1445053		
2 PLC ±0.13		WEIGHT			
3 PLC ±		CUSTOMER DRAWING	RESTRICTED TO		
4 PLC ±					
ANGLES ±			SCALE 5:1 SHEET 1 OF 1 REV CI		
FINISH					
$\triangle 1$		SEE TABLE			