



Schottky Rectifier, 2 x 10 A

MBRB20...CTPbF

D²PAK
MBR20 ...CT-1PbF


FEATURES

- 150 °C T_J operation
- Low forward voltage drop
- High frequency operation
- Center tap D²PAK and TO-262 packages
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition
- AEC-Q101 qualified


RoHS*
COMPLIANT
HALOGEN
FREE

DESCRIPTION

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

PRODUCT SUMMARY

| | |
|--------------------|---------------|
| I _{F(AV)} | 2 x 10 A |
| V _R | 80 V to 100 V |

MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL | CHARACTERISTICS | VALUES | UNITS |
|--------------------|-----------------------------------|-------------|-------|
| I _{F(AV)} | Rectangular waveform (per device) | 20 | A |
| I _{FRM} | T _C = 133 °C (per leg) | 20 | |
| V _{RRM} | | 80 to 100 | V |
| I _{FSM} | t _p = 5 µs sine | 850 | A |
| V _F | 10 Apk, T _J = 125 °C | 0.70 | V |
| T _J | Range | - 65 to 150 | °C |

VOLTAGE RATINGS

| PARAMETER | SYMBOL | MBRB2080CTPbF MBR2080CT-1PbF | MBRB2090CTPbF MBR2090CT-1PbF | MBRB20100CTPbF MBR20100CT-1PbF | UNITS |
|--------------------------------------|------------------|---------------------------------|---------------------------------|-----------------------------------|-------|
| Maximum DC reverse voltage | V _R | | | | |
| Maximum working peak reverse voltage | V _{RWM} | 80 | 90 | 100 | V |

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | TEST CONDITIONS | VALUES | UNITS |
|--|--------------------|--|--------|-------|
| Maximum average forward current per leg | I _{F(AV)} | T _C = 133 °C, rated V _R | 10 | A |
| per device | | | 20 | |
| Peak repetitive forward current per leg | I _{FRM} | Rated V _R , square wave, 20 kHz, T _C = 133 °C | 20 | |
| Non-repetitive peak surge current | I _{FSM} | 5 µs sine or 3 µs rect. pulse | 850 | |
| | | Following any rated load condition and with rated V _{RRM} applied | 150 | |
| Surge applied at rated load conditions halfwave, single phase, 60 Hz | | | | |
| Peak repetitive reverse surge current | I _{RRM} | 2.0 µs, 1.0 kHz | 0.5 | |
| Non-repetitive avalanche energy per leg | E _{AS} | T _J = 25 °C, I _{AS} = 2 A, L = 12 mH | 24 | mJ |

* Pb containing terminations are not RoHS compliant, exemptions may apply

ELECTRICAL SPECIFICATIONS

| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS | |
|---------------------------------------|----------------|---|------------------------------------|--------|------------------------|--|
| Maximum forward voltage drop | $V_{FM}^{(1)}$ | 10 A | $T_J = 25 \text{ }^\circ\text{C}$ | 0.80 | V | |
| | | 20 A | | 0.95 | | |
| | | 10 A | $T_J = 125 \text{ }^\circ\text{C}$ | 0.70 | | |
| | | 20 A | | 0.85 | | |
| Maximum instantaneous reverse current | $I_{RM}^{(1)}$ | $T_J = 25 \text{ }^\circ\text{C}$ | Rated DC voltage | 0.10 | mA | |
| | | $T_J = 125 \text{ }^\circ\text{C}$ | | 6 | | |
| Threshold voltage | $V_{F(TO)}$ | $T_J = T_J \text{ maximum}$ | | 0.433 | V | |
| Forward slope resistance | r_t | | | 15.8 | $\text{m}\Omega$ | |
| Maximum junction capacitance | C_T | $V_R = 5 \text{ V}_\text{DC}$ (test signal range 100 kHz to 1 MHz), $25 \text{ }^\circ\text{C}$ | | 400 | pF | |
| Typical series inductance | L_S | Measured from top of terminal to mounting plane | | 8.0 | nH | |
| Maximum voltage rate of change | dV/dt | Rated V_R | | 10 000 | $\text{V}/\mu\text{s}$ | |

Note(1) Pulse width < 300 μs , duty cycle < 2 %
THERMAL - MECHANICAL SPECIFICATIONS

| PARAMETER | SYMBOL | TEST CONDITIONS | VALUES | UNITS | |
|--|------------|--------------------------------------|--------------|--|--|
| Maximum junction temperature range | T_J | | - 65 to 150 | $^\circ\text{C}$ | |
| Maximum storage temperature range | T_{Stg} | | - 65 to 175 | | |
| Maximum thermal resistance, junction to case per leg | R_{thJC} | DC operation | 2.0 | $^\circ\text{C}/\text{W}$ | |
| Typical thermal resistance, case to heatsink | R_{thCS} | Mounting surface, smooth and greased | 0.50 | | |
| Maximum thermal resistance, junction to ambient | R_{thJA} | DC operation | 50 | | |
| Approximate weight | | | 2 | g | |
| | | | 0.07 | oz. | |
| Mounting torque | minimum | Non-lubricated threads | 6 (5) | $\text{kgf} \cdot \text{cm}$ (lbf · in) | |
| | maximum | | 12 (10) | | |
| Marking device | | Case style D ² PAK | MBRB20100CT | | |
| | | Case style TO-262 | MBR20100CT-1 | | |

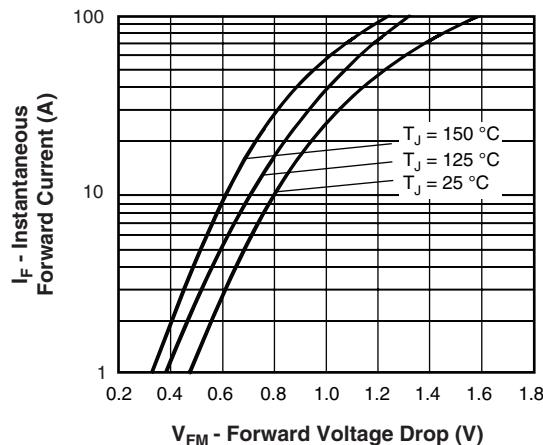


Fig. 1 - Maximum Forward Voltage Drop Characteristics (Per Leg)

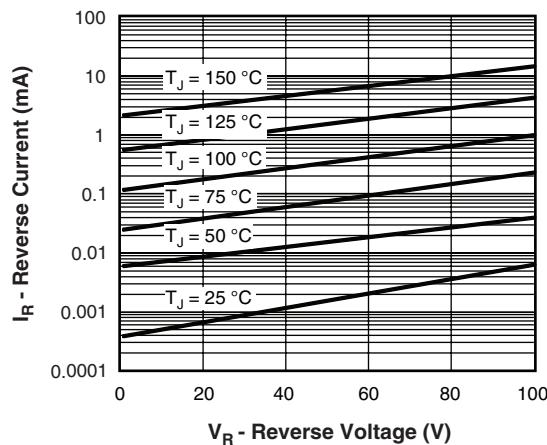


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage (Per Leg)

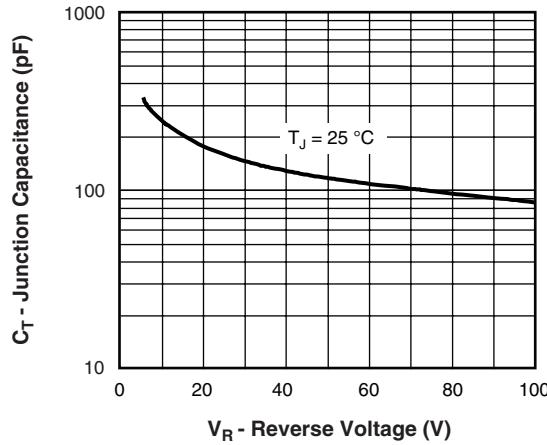


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

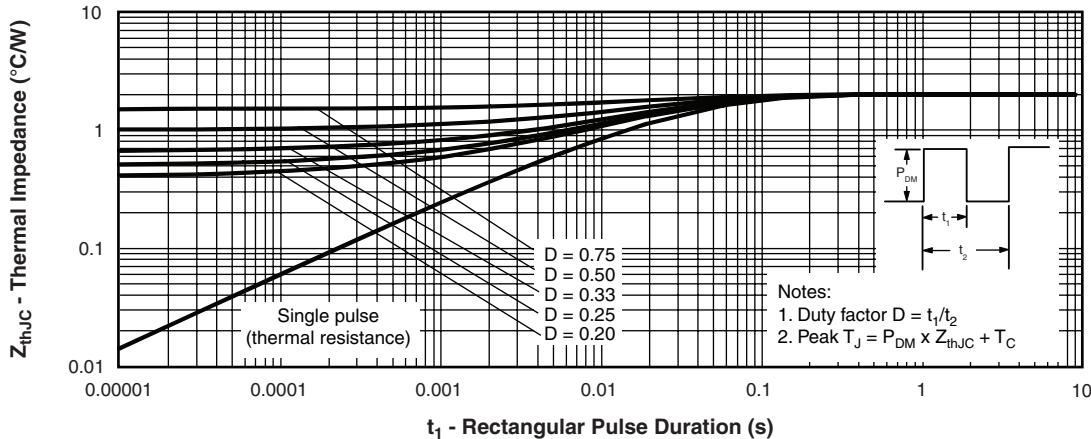


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics (Per Leg)

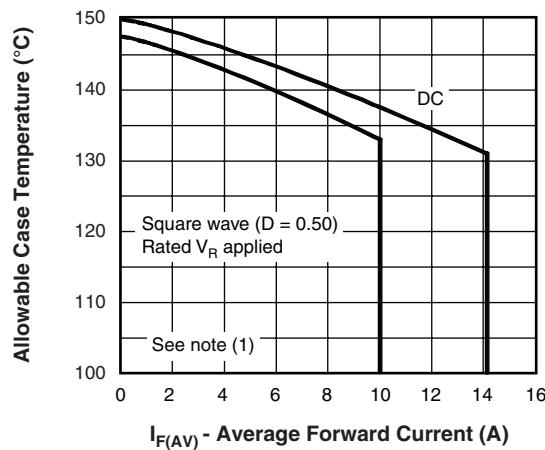


Fig. 5 - Maximum Allowable Case Temperature vs.
Average Forward Current (Per Leg)

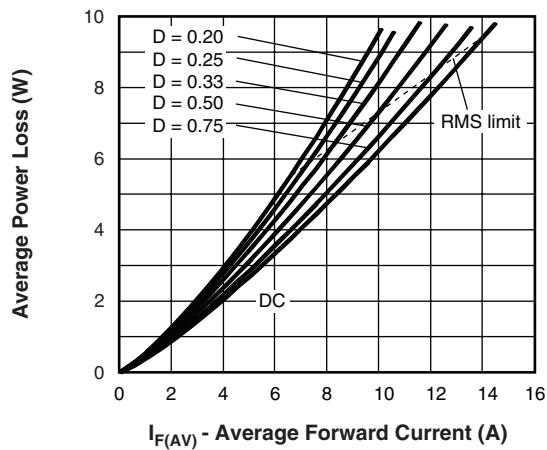


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

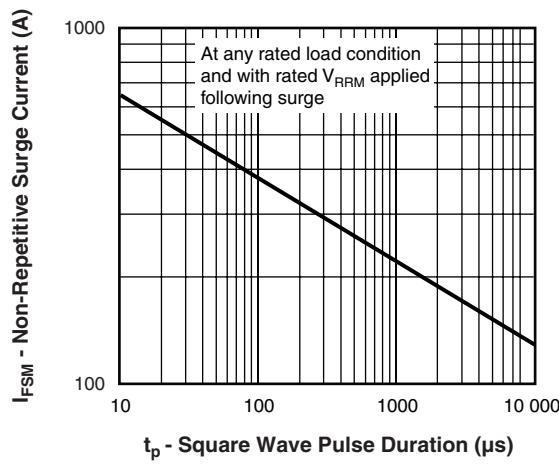


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

Note

(1) Formula used: $T_C = T_J - (P_d + P_{dREV}) \times R_{thJC}$;
 $P_d = \text{Forward power loss} = I_{F(AV)} \times V_{FM}$ at $(I_{F(AV)}/D)$ (see fig. 6);
 $P_{dREV} = \text{Inverse power loss} = V_{R1} \times I_R (1 - D)$; I_R at $V_{R1} = \text{Rated } V_R$

ORDERING INFORMATION TABLE

| Device code | MBR | B | 20 | 100 | CT | -1 | TRL | P |
|-------------|-----|---|----|-----|----|----|-----|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

- [1]** - Essential part number
- [2]** - • B = D²PAK **[6]** None
• None = TO-262 **[6]** = -1
- [3]** - Current rating (20 = 20 A) **80** = 80 V
90 = 90 V
100 = 100 V
- [4]** - Voltage ratings
- [5]** - CT = Essential part number
- [6]** • None = D²PAK **[2]** = B
• -1 = TO-262 **[2]** None
- [7]** - • None = Tube (50 pieces)
• TRL = Tape and reel (left oriented - for D²PAK only)
• TRR = Tape and reel (right oriented - for D²PAK only)
- [8]** - • None = Standard production
• PbF = Lead (Pb)-free (for TO-262 and D²PAK tube)
• P = Lead (Pb)-free (for D²PAK TRR and TRL)

| LINKS TO RELATED DOCUMENTS | |
|----------------------------|--|
| Dimensions | www.vishay.com/doc?95014 |
| Part marking information | www.vishay.com/doc?95008 |
| Packaging information | www.vishay.com/doc?95032 |

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.