



Top View of Assembly

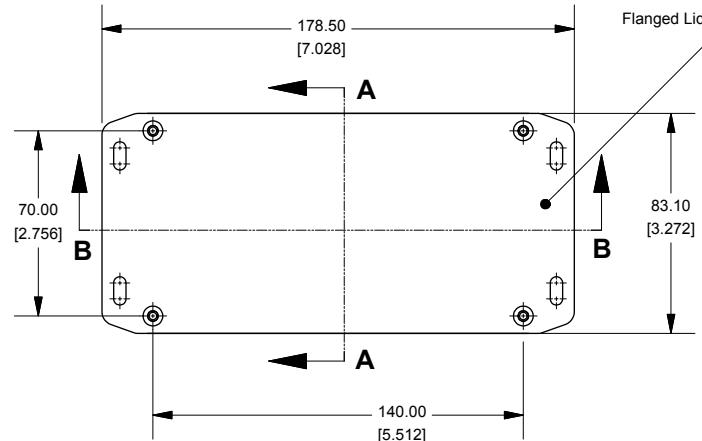


SECTION A-A

End View of Assembly

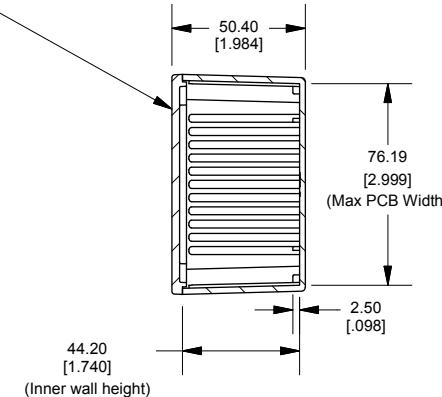


SECTION B-B

Side View of Assembly

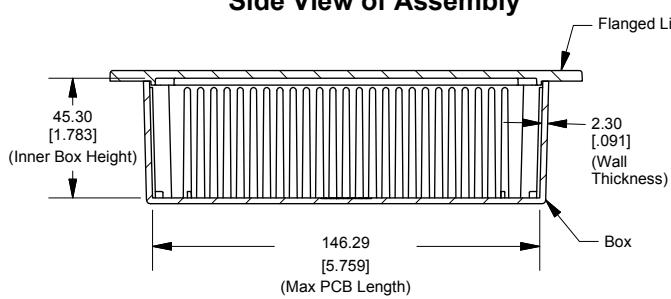

Top View Looking Inside Box

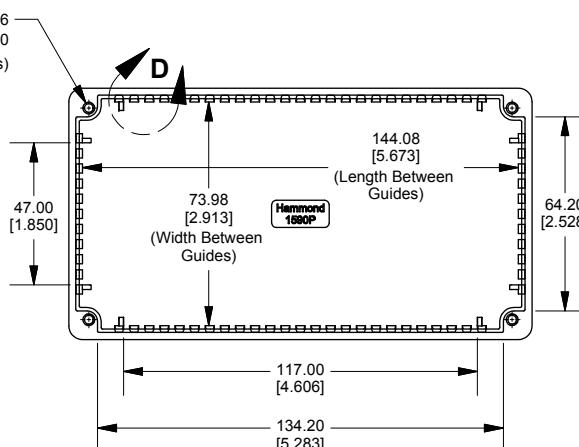

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE

Purchased assembly includes box, lid and 4 cover screws.
Box and lid are made from Diecast Aluminum Alloy.
Silicone Gasket supplied with liquid resistant enclosure.

PART NUMBERS

1590PFL Enclosure	1590PFL
Natural Finish Enclosure	1590PFL
Black Textured Enclosure	1590PFLBK
1590PFL Liquid Resistant Enclosure (Silicone Gasket)	
Natural Finish Enclosure	1590WPFL
Black Textured Enclosure	1590WPFLBK

ACCESSORIES

Recommended Torque: 75 ozf.in / 55 cN.m

Liquid Resistant Cover Screws

Stainless Steel Cover Screws (Pkg 100) [M3.5 x 12mm, With O-Ring]	1550WMS100
Black Stainless Steel Cover Screws (Pkg 100) [M3.5 x 12mm, With O-Ring]	1550WMS100BK

Standard Cover Screws

Plated Cover Screws (Pkg 100) [M3.5 x 12mm]	1550MS100
Black Cover Screws (Pkg 100) [M3.5 x 12mm]	1550MS100BK




HAMMOND
MANUFACTURING™
1590PFL

www.hammondmfg.com


SECTION C-C

Side View of Slot

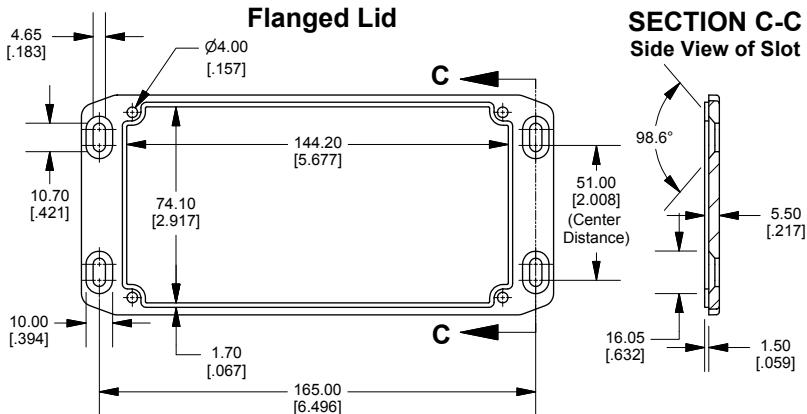

DETAIL D

Top View - Interior Features

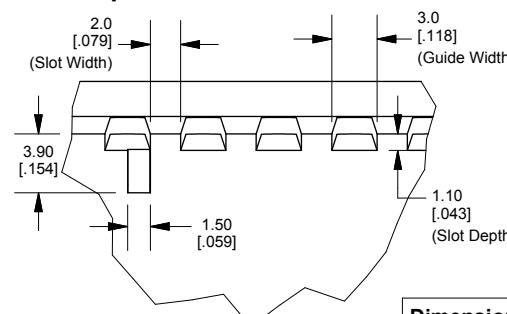

Dimensions:
mm
[inches]