THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	U2	REVISED PER ECO-12-011603	25JUN12	KH	JO

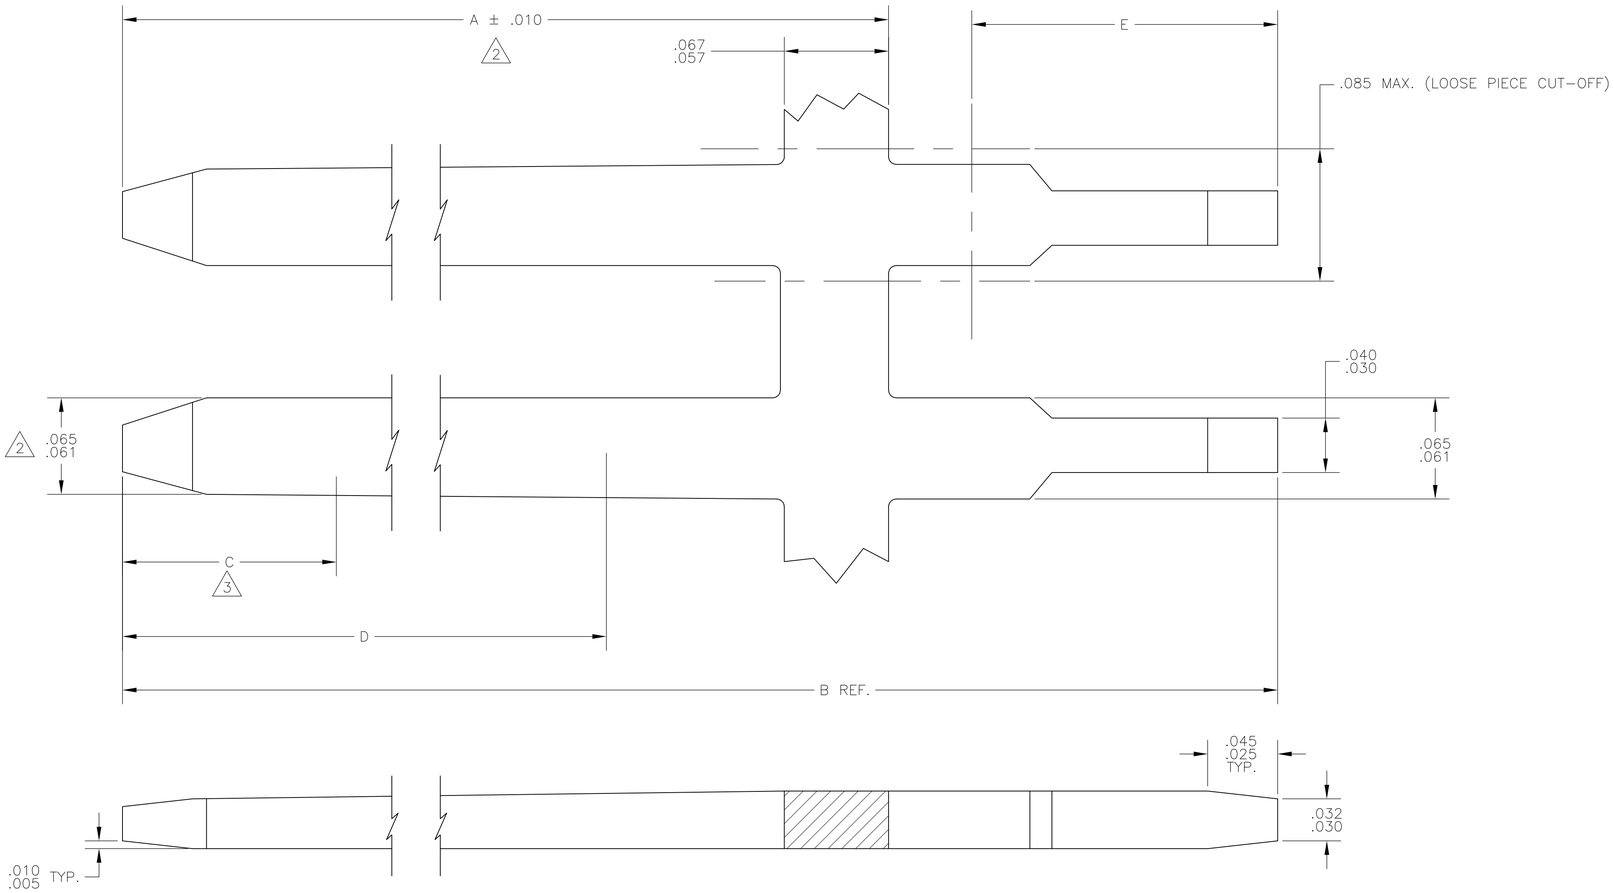

2. .065/.061 DIMENSION MAY GO TO .067 ON POSTS WITH AN A DIMENSION OF 1.187 OR LONGER.
3. POINT OF MEASUREMENT FOR PLATING THICKNESS
4. .000100-.000200 BRIGHT TIN-LEAD OVER .000030 NICKEL.
5. .000030 GOLD IN AREA D, GOLD FLASH ON REMAINDER OF POST, ALL OVER .000050 NICKEL.
6. .000015 GOLD IN AREA D, GOLD FLASH ON REMAINDER OF POST, ALL OVER .000050 NICKEL.
7. .000050 GOLD OVER .000050 NICKEL OVER ENTIRE POST.
8. .000015 GOLD IN AREA D, .000100-.000200 BRIGHT TIN-LEAD ON SOLDER AREA, WITH ENTIRE POST UNDERPLATED .000050 NICKEL.
9. .000030 GOLD IN AREA D, .000100-.000200 BRIGHT TIN-LEAD ON SOLDER AREA, WITH ENTIRE POST UNDERPLATED .000050 NICKEL.
10. OBSOLETE PART NUMBER.
11. .000100-.000200 MATTE TIN OVER .000030 NICKEL.
12. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
13. ROHS 2002/95/EC COMPLIANT.

	FINISH	E	D	C	B	A	LOOSE PIECE PART NO	PART NUMBER
	11	-	-	.200	.825	.587	-	13 7-85842-0
	11	-	-	.200	1.430	1.187	-	13 6-85842-1
	11	-	-	.200	.990	.750	-	13 5-85842-8
	11	-	-	.200	1.550	1.310	-	13 5-85842-5
	11	-	-	.200	.645	.405	5-85832-1	13 5-85842-2
	11	-	-	.200	.837	.587	-	4-85842-6
	11	-	-	.200	.655	.405	-	4-85842-5
	4	-	.950	.500	1.300	1.062	10 2-86211-3	10 4-85842-4
	9	.145	1.200	.700	1.550	1.310	10 2-86211-2	10 4-85842-3
	9	.145	1.080	.500	1.430	1.187	10 2-86211-1	10 4-85842-2
	9	.145	.950	.500	1.300	1.062	10 2-86211-0	10 4-85842-1
	9	.145	.765	.400	1.115	.875	10 1-86211-9	10 4-85842-0
	9	.145	.640	.300	.990	.750	10 1-86211-8	10 3-85842-9
	9	.145	.550	.300	.900	.662	10 1-86211-7	10 3-85842-8
	8	.145	.475	.200	.825	.587	10 1-86211-6	10 3-85842-7
OBSOLETE	9	.145	.475	.200	.825	.587	10 1-86211-5	10 3-85842-6
	9	.145	.295	.100	.845	.405	10 85832-8	10 3-85842-5
	8	.145	.295	.100	.645	.405	10 85832-7	10 3-85842-4
	6	-	1.080	.500	1.430	1.187	10 1-86211-4	10 3-85842-3
	6	-	.640	.300	.990	.750	10 1-86211-3	10 3-85842-2
	6	-	1.200	.700	1.550	1.310	10 1-86211-2	3-85842-1
	4	-	-	.200	1.115	.875	10 1-86211-1	10 3-85842-0
	5	-	.950	.500	1.300	1.062	10 1-86211-0	10 2-85842-8
	7	-	-	.200	.645	.405	10 85832-6	10 2-85842-7
OBSOLETE	6	-	.190	.100	.540	.300	10 86211-9	10 2-85842-6
	4	-	-	.200	.540	.300	10 86211-8	10 2-85842-4
	6	-	-	.200	1.550	1.310	85841-4	2-85842-3
OBSOLETE	6	-	.475	.200	.825	.587	10 86211-7	10 2-85842-2
	5	-	1.080	.500	1.430	1.187	10 86211-6	10 2-85842-1
	4	-	-	.200	.825	.587	10 86211-5	2-85842-0
	6	-	-	.200	.990	.750	85876-3	1-85842-9
	5	-	.475	.200	.825	.587	10 86211-4	1-85842-8
	5	-	.765	.400	1.115	.875	10 86211-3	1-85842-6
	6	-	.295	.100	.645	.405	10 85832-5	10 1-85842-4
	5	-	.550	.300	.900	.662	10 86211-2	1-85842-3
	4	-	-	.200	1.430	1.187	10 86211-1	10 1-85842-1
	5	-	.640	.300	.990	.750	10 85876-2	10 85842-9
	4	-	-	.200	.990	.750	10 85876-1	10 85842-8
	5	-	1.200	.700	1.550	1.310	10 85841-2	10 85842-6
	4	-	-	.200	1.550	1.310	10 85841-1	10 85842-5
	5	-	.295	.100	.645	.405	10 85832-2	10 85842-3
	4	-	-	.200	.645	.405	85832-1	85842-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN KATE HELM 10JUL89
CHK H MOLL 17JUL89
APVD SAM BEAM 17JUL89
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME CONTACT,MOD I MALE,(.031x.062)

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-85842 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV U2

4805 (3/11)