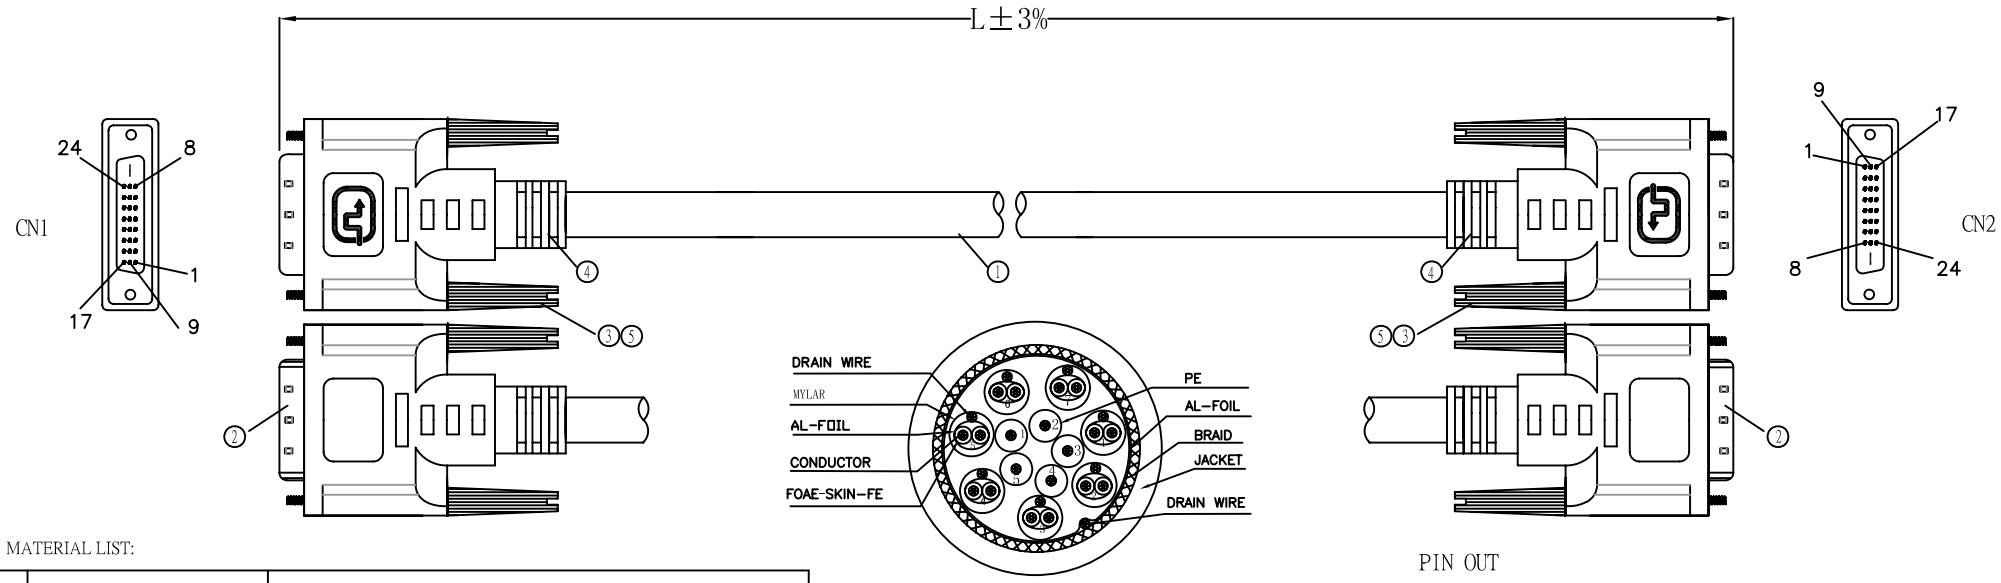

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION
①	CABLE	UL20276 7*(1P*28AWG+AL+D+MYLAR)+1P*28AWG+3C*28AWG +AL+D+B (60%) OD:8.5±0.2mm COLOR:BLACK
②	DVI CONNECTOR	DVI 24+1 MALE INSULATOR BLACK SOLDER TYPE PIN GOLD PLATED 1u" GOLD PLATED SHELL
③	SCREW	Ø4*47mm NICKEL PLATED
④	MOLDING PVC	MOLDING PVC 063 45P COLOR:BLACK
⑤	MOLDING PVC	MOLDING PVC 063 30P COLOR:BLACK

Marking: Maxxtro C AWM E200765 STYLE 20276 80℃ 30V FT2

ITEM NO	LENGTH	PVC COLOR	PACKING
103107	10000±100mm	BLACK 0020	plain polybag

PIN OUT

CN1		CN2
1	WHITE	1
2	GREEN	2
3	DRAIN	3
3	DRAIN	3
4	WHITE	4
5	YELLOW	5
6	ORANGE	6
7	YELLOW	7
9	WHITE	9
10	BROWN	10
11	DRAIN	11
11	DRAIN	11
12	WHITE	12
13	ORANGE	13

CN1		CN2
14	RED	14
15	WHITE	15
16	VIOLET	16
17	WHITE	17
18	BLACK	18
19	DRAIN	19
19	DRAIN	19
20	WHITE	20
21	BLUE	21
22	DRAIN	22
23	WHITE	23
24	RED	24
SHELL	DRAIN	SHELL

ELECTRONIC TEST:

A.OPEN/SHORT/INTERMITTENCE: 100%.

B.HI-POT: 300V DC/sec

C.INSULATION RESISTANCE: 10M ohm (MIN)

D.CONDUCTIVE RESISTANCE: 5ohm (MAX)

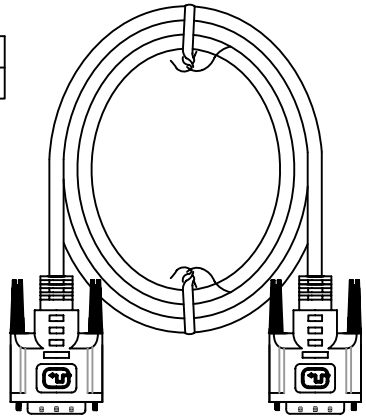

REMARK	NO	CHA.NO	SIGNATURE	DATE

DRAWN BY	Renzhi			SIGN	REV.	SCALE
CHECKED BY					A	
AUDITED BY		APPROVED BY				
CRAFT		DATE	2011.03.29	PAGE OF		

Maxxtro®