
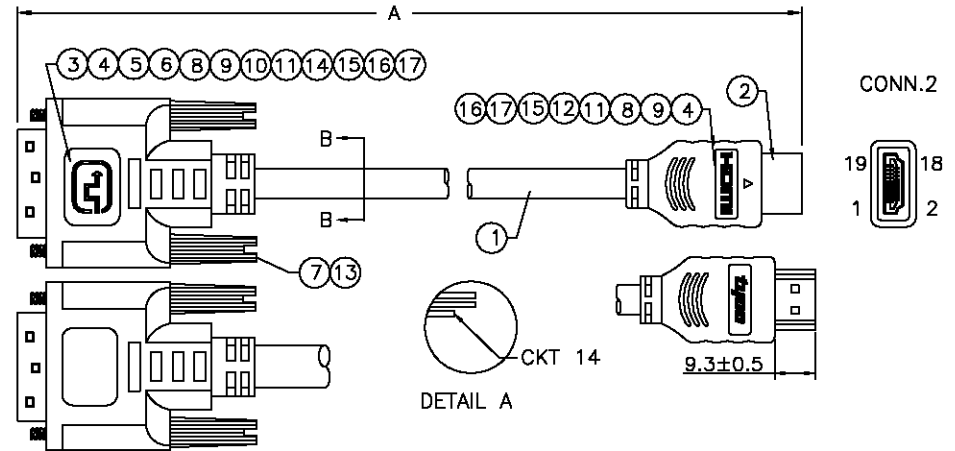


UNIT A:
P1: WHITE-GREEN
P2: WHITE-GREEN
P3: WHITE-GREEN
P4: WHITE-GREEN
UNIT B:
P5: YELLOW-ORANGE
UNIT C:
6. RED
7. VIOLET
8. WHITE
9. GREEN
10. BLUE



CONNECTION TABLE				
CABLE			HDMI	DVI
CONSTRUCTION	UNIT	WIRE COLOR	PIN	PIN
STP (BROWN)	A	GREEN	1	2
		DRAIN WIRE	2	3
		WHITE	3	1
STP (RED)	A	GREEN	4	10
		DRAIN WIRE	5	11
		WHITE	6	9
STP (GREEN)	A	GREEN	7	18
		DRAIN WIRE	8	19
		WHITE	9	17
STP (BLUE)	A	GREEN	10	23
		DRAIN WIRE	11	22
		WHITE	12	24
—			13	NC
—			14	NC
SINGLE WIRE	C	WHITE	15	6
SINGLE WIRE	C	GREEN	16	7
TWIST PAIR	B	YELLOW	17	15
		ORANGE	18	14
SINGLE WIRE	C	BLUE	19	16
—			NC	8
SHIELD BRAID			SHELL	SHELL

1770020-7	1500±20
1770020-6	1000±20
1770020-5	750±10
1770020-4	500±10
1770020-3	250±10
1770020-2	3000±30
1770020-1	2000±20
P/N	LENGTH(A)

A/R	MR	HEAT SHRINK TUBING, ID=1.5MM, BLUE	17
A/R	MR	HEAT SHRINK TUBING, ID=1.5MM, BROWN	16
A/R	MR	HEAT SHRINK TUBING, ID=1.5MM, GREEN	15
A/R	MR	UL TAPE, W=9MM	14
A/R	KG	PVC, BLACK, 95±3 SHORE A	13
1	PC	SHELL, FOR HDMI	12
A/R	MR	HEAT SHRINK TUBING, ID=1.5MM, RED	11
A/R	MR	ACETATE TAPE, COLOR: BLACK, T=0.22MM, W=10MM, L=50MM	10
A/R	MR	HEAT SHRINK TUBING, ID: 2.5MM, BLACK.	9
A/R	MR	HEAT SHRINK TUBING, ID: 0.7MM, BLACK.	8
2	PC	SCREW, DVI #4-40 L=45MM	7
1	PC	METAL CAN FOR DVI CONN.	6
1	PC	DVI-D DIGITAL, 18PIN+1PIN, GOLD FLASH	5
A/R	KG	PVC, 40P, COLOR: BLACK	4
A/R	MR	HEAT SHRINK TUBING, ID: 1.0MM, BLACK.	3
1	PC	HDMI 19PIN PLUG	2
A/R	MR	CABLE, UL20276 (1P*30AWG+DRAIN+AL/MYLAR)*4+30AWG*1P+28AWG*5C+AL/MYLAR+BRAID, COLOR: BLACK	1
Q'TY	U/M	DESCRIPTION	ITEM NO.

LDC
HY
DIST

E1	REVISED PER ECO-11-005027	19APR11	RK	HMR
LTR	REVISION RECORD	DATE	DWN	APVE

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±	SIZE A3	SCALE —	SHEET 1 OF 1	REV E1
		DWN M.TSAI		ENG. J.PI	
		CHK J.PI		CHK	
		APVD J.CHEN			
ANGLES ± SURFACE TEXTURE		TE CONNECTIVITY			
		NAME CABLE ASSY, DVI-HDMI			
		DRAWING NO. C-1770020			
		CUSTOMER DRAWING			