
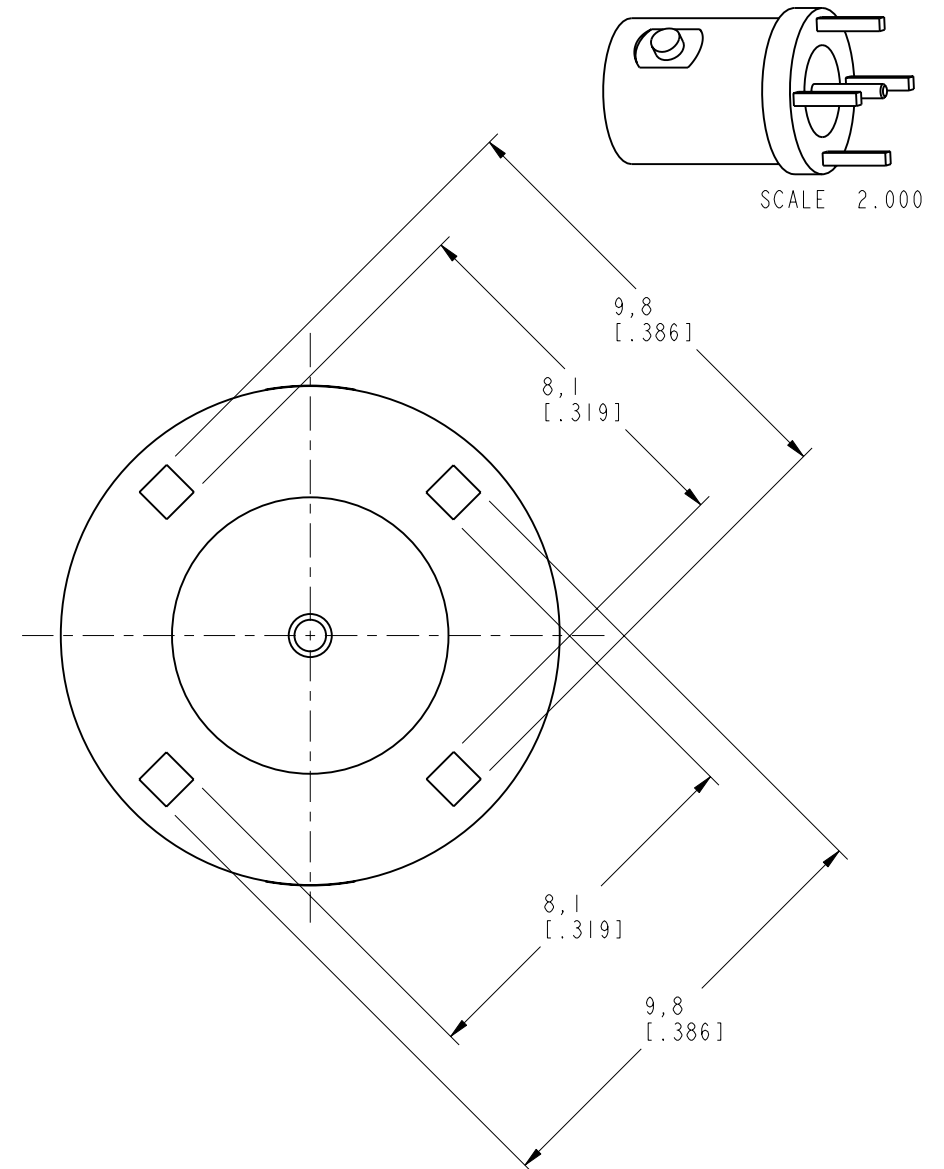


NOTES:

1. MATERIALS OF CONSTRUCTION:
BODY = BRASS (ASTM-B16 H02, C36000), NICKEL PLATED (.000100 MIN THICK)
CONTACT PIN = PHOSPHOR BRONZE (QQ-B-750), GOLD PLATED (.000003 MIN THICK)
INSULATOR = PTFE, ASTM D 1710 OR EQUIV
LOCK RING = BRASS (QQ-B-613), NICKEL PLATED (.000100 MIN THICK)
2. ELECTRICAL:
 - A. IMPEDANCE: 50 OHM
 - B. FREQUENCY RANGE: DC - 4 GHz
3. PHYSICAL:
 - A. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
 - A. QUANTITY: SINGLE PACK
 - B. MARKING: BAG TO BE MARKED
"AMPHENOL, 31-5976-50RFX, AND DATE CODE"

31-5976-50RFX		REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR	
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	3/26/03	44405	CPM	

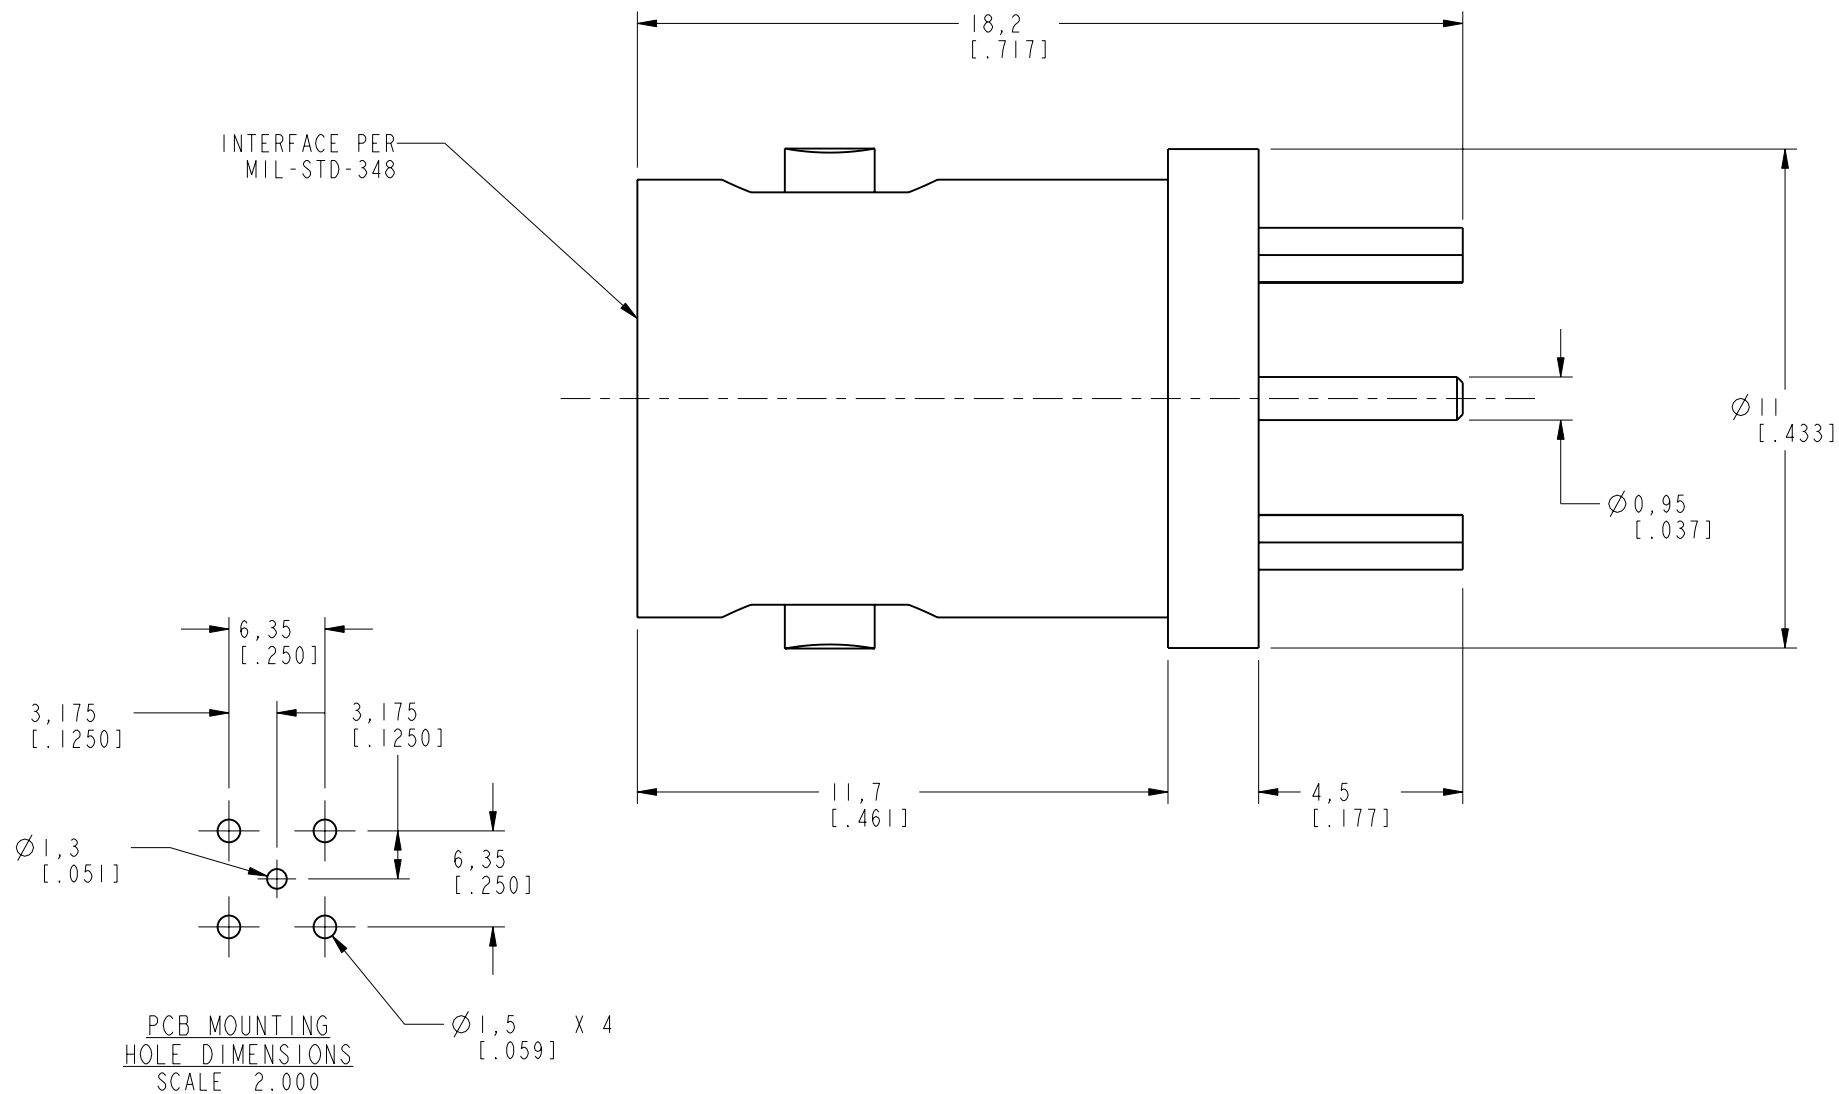

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ±0.2mm ±0.4mm ± 0.6mm			MATERIAL C. McGRATH		DATE 3/17/03		TITLE BNC P.C. MOUNT RECEPTACLE JACK			Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810		
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.			ENGINEER O. BARTHELMES		DATE 3/17/03							
			REFERENCE O. BARTHELMES		DATE 3/26/03							
GEN# 31-5976-50RFX_ASSY					CAD FILE I:\BNC\31-5976-50RFX			CODE ID 74868	DWG SIZE B	DRAWING NO. 31-5976-50RFX		REV A
								SCALE: 6.0:1		SHEET 2 OF 2		