

10 nH Inductor (Top View)

ACCU-L® TECHNOLOGY

The Accu-L® SMD Inductor is based on thin-film multilayer technology. This technology provides a level of control on the electrical and physical characteristics of the component which gives consistent characteristics within a lot and lot-to-lot.

The original design provides small size, excellent high-frequency performance and rugged construction for reliable automatic assembly.

The Accu-L® inductor is particularly suited for the telecommunications industry where there is a continuing trend towards miniaturization and increasing frequencies. The Accu-L® inductor meets both the performance and tolerance requirements of present cellular frequencies 450MHz and 900MHz and of future frequencies, such as 1700MHz, 1900MHz and 2400MHz.


FEATURES

- High Q
- RF Power Capability
- High SRF
- Low DC Resistance
- Ultra-Tight Tolerance on Inductance
- Standard 0603 and 0805 Chip Size
- Low Profile
- Rugged Construction
- Taped and Reeled

APPLICATIONS

- Mobile Communications
- Satellite TV Receivers
- GPS
- Vehicle Locations Systems
- Filters
- Matching Networks

DIMENSIONS: millimeters (inches)

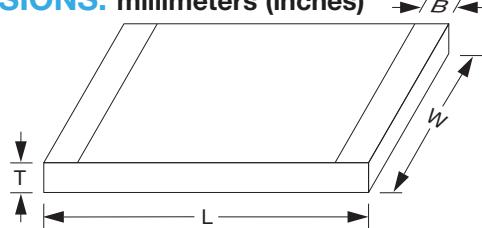

	0603	0805
L	1.6 ± 0.10 (0.063 ± 0.004)	2.11 ± 0.10 (0.083 ± 0.004)
W	0.81 ± 0.10 (0.032 ± 0.004)	1.5 ± 0.10 (0.059 ± 0.004)
T	0.61 ± 0.10 (0.024 ± 0.004)	0.91 ± 0.13 (0.036 ± 0.005)
B	top: $0.0 +0.3/-0.0$ ($0.0+0.012$) bottom: 0.35 ± 0.20 (0.014 ± 0.008)	0.25 ± 0.15 (0.010 ± 0.006)

Operating/Storage
Temp. Range:
-55°C to +125°C

Accu-L® 0603 and 0805

SMD High-Q RF Inductor

AVX RF

HOW TO ORDER

L	0805	4R7	D	E	S	TR		
T	T	T	T	T	T	T		
Product Inductor	Size 0603 0805	Inductance Expressed in nH (2 significant digits + number of zeros) for values <10nH , letter R denotes decimal point. Example: 22nH = 220 4.7nH = 4R7	Tolerance for $L \leq 4.7\text{nH}$, B = $\pm 0.1\text{nH}$ C = $\pm 0.2\text{nH}$ D = $\pm 0.5\text{nH}$	Specification Code E = Accu-L® 0805 technology G = Accu-L® 0603 technology	Termination Code W = Nickel/ solder coated (Sn 63, Pb 37) **S = Nickel/ Lead Free Solder coated (Sn100)	Packaging Code TR = Tape and Reel (3,000/reel)		
Not RoHS Compliant		4.7nH < L < 10nH , C = $\pm 0.2\text{nH}$ D = $\pm 0.5\text{nH}$		L ≥ 10nH , G = $\pm 2\%$ J = $\pm 5\%$		**RoHS compliant		
 LEAD-FREE COMPATIBLE COMPONENT		 RoHS COMPLIANT		Engineering Kits Available see pages 90-91			2	
<i>For RoHS compliant products, please select correct termination style.</i>								

ELECTRICAL SPECIFICATIONS TABLE FOR ACCU-L® 0603

Inductance L (nH)	Available Inductance Tolerance	450 MHz Test Frequency		900 MHz Test Frequency		1900 MHz Test Frequency		2400 MHz Test Frequency		SRF min (MHz)	R _{DC} max (Ω)	I _{DC} max (mA) (1)
		Q Typical	L (nH)	Q Typical	L (nH)	Q Typical	L (nH)	Q Typical	L (nH)			
1.2	$\pm 0.1, \pm 0.2\text{nH}$	49	1.2	70	1.2	134	1.2	170	10000	0.04	1000	
1.5	$\pm 0.1, \pm 0.2\text{nH}$	26	1.54	39	1.52	63	1.52	76	10000	0.06	1000	
1.8	$\pm 0.1, \pm 0.2\text{nH}$	20	1.74	30	1.73	50	1.72	59	10000	0.07	1000	
2.2	$\pm 0.1, \pm 0.2\text{nH}$	20	2.2	30	2.24	49	2.24	56	10000	0.08	1000	
2.7	$\pm 0.1, \pm 0.2\text{nH}$	21	2.7	30	2.75	48	2.79	54	9000	0.08	750	
3.3	$\pm 0.1, \pm 0.2, \pm 0.5\text{nH}$	24	3.33	35	3.39	56	3.47	64	8400	0.08	750	
3.9	$\pm 0.1, \pm 0.2, \pm 0.5\text{nH}$	25	3.9	57	4.06	60	4.21	69	6500	0.12	500	
4.7	$\pm 0.1, \pm 0.2, \pm 0.5\text{nH}$	23	4.68	32	4.92	46	5.2	49	5500	0.15	500	
5.6	$\pm 0.2, \pm 0.5\text{nH}$	26	5.65	36	5.94	54	6.23	60	5000	0.25	300	
6.8	$\pm 0.2, \pm 0.5\text{nH}$	23	6.9	33	7.3	47	8.1	39	4500	0.30	300	
8.2	$\pm 0.2, \pm 0.5\text{nH}$	23	8.4	31	10	35	12.1	31	3800	0.35	300	
10.0	$\pm 2\%, \pm 5\%$	28	10	39	11.8	47	14.1	41	3500	0.45	300	
12.0	$\pm 2\%, \pm 5\%$	28	13.2	38	14.1	30	17.2	20	3000	0.50	300	
15.0	$\pm 2\%, \pm 5\%$	28	16.2	38	25.9	30	49.8	15	2500	0.60	300	

(1) I_{DC} measured for 15°C rise at 25°C ambient temperature when soldered to FR-4 board.

Inductance and Q measured on Agilent 4291B / 4287 using the 16196A test fixture.

ELECTRICAL SPECIFICATIONS TABLE FOR ACCU-L® 0805

Inductance L (nH)	Available Inductance Tolerance	450 MHz Test Frequency		900 MHz Test Frequency		1700 MHz Test Frequency		2400 MHz Test Frequency		SRF min (MHz)	R _{DC} max (Ω)	I _{DC} max (mA)	
		Q Typical	L (nH)	Q Typical	L (nH)	Q Typical	L (nH)	Q Typical	L (nH)			$\Delta T = 15^\circ\text{C}$ (1)	$\Delta T = 70^\circ\text{C}$ (2)
1.2	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	60	1.2	92	1.2	122	1.2	92	10000	0.05	1000	2000	
1.5	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	50	1.5	74	1.5	102	1.5	84	10000	0.05	1000	2000	
1.8	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	50	1.8	72	1.8	88	1.9	73	10000	0.06	1000	2000	
2.2	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	42	2.2	62	2.2	82	2.3	72	10000	0.07	1000	2000	
2.7	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	42	2.7	62	2.8	80	2.9	70	10000	0.08	1000	2000	
3.3	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	38	3.3	46	3.4	48	3.5	57	10000	0.11	750	1500	
3.9	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	27	3.9	36	4.0	38	4.1	42	10000	0.20	750	1500	
4.7	$\pm 0.1\text{nH}, \pm 0.2\text{nH}, \pm 0.5\text{nH}$	43	4.8	62	5.3	76	5.8	60	5500	0.10	750	1500	
5.6	$\pm 0.5\text{nH}$	50	5.7	68	6.3	73	7.6	62	4600	0.10	750	1500	
6.8	$\pm 0.5\text{nH}$	43	7.0	62	7.7	71	9.4	50	4500	0.11	750	1500	
8.2	$\pm 0.5\text{nH}$	43	8.5	56	10.0	55	15.2	32	3500	0.12	750	1500	
10	$\pm 2\%, \pm 5\%$	46	10.6	60	13.4	52	—	—	2500	0.13	750	1500	
12	$\pm 2\%, \pm 5\%$	40	12.9	50	17.3	40	—	—	2400	0.20	750	1500	
15	$\pm 2\%, \pm 5\%$	36	16.7	46	27	—	—	—	2200	0.20	750	1000	
18	$\pm 2\%, \pm 5\%$	30	21.9	27	—	—	—	—	1700	0.35	500	1000	
22	$\pm 2\%, \pm 5\%$	36	27.5	33	—	—	—	—	1400	0.40	500	1000	

(1) I_{DC} measured for 15°C rise at 25°C ambient temperature

(2) I_{DC} measured for 70°C rise at 25°C ambient temperature

L, Q, SRF measured on HP 4291A, Boonton 34A and Wiltron 360 Vector Analyzer, R_{DC} measured on Keithley 580 micro-ohmmeter.

AVX


Accu-L® 0603 and 0805

AVX RF

SMD High-Q RF Inductor


L0603

Typical Q vs. Frequency
L0603

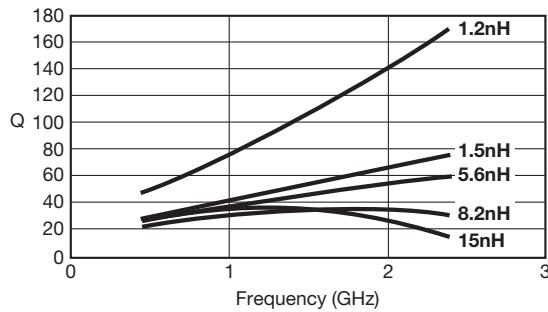

Measured on AGILENT 4291B/4287
using the 16196A test fixture


Typical Inductance vs. Frequency
L0603

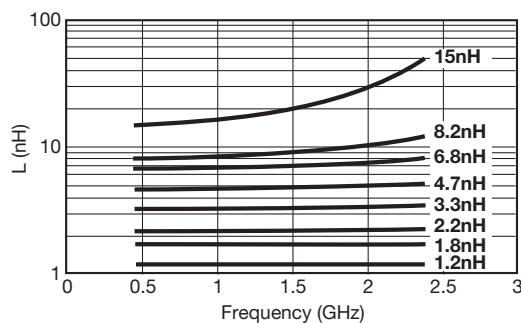

Measured on AGILENT 4291B/4287
using the 16196A test fixture


L0805

Typical Q vs. Frequency
L0805

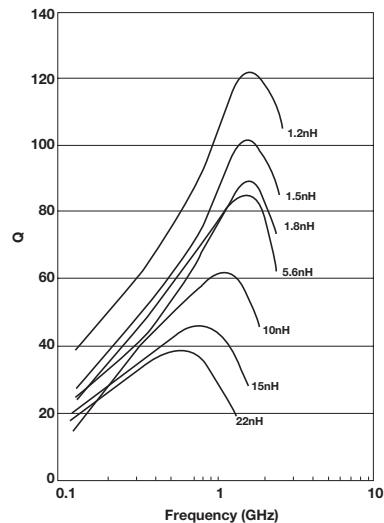


Measured on HP4291A and
Boonton 34A Coaxial Line

Typical Inductance vs. Frequency
L0805

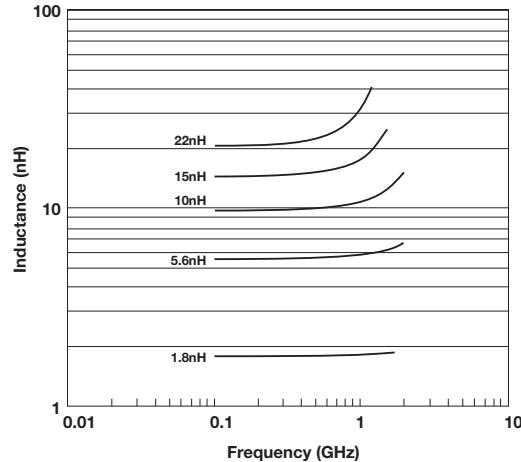

Measured on HP4291A and
Wiltron 360 Vector Analyzer

Maximum Temperature Rise
at 25°C ambient temperature (on FR-4)
L0805

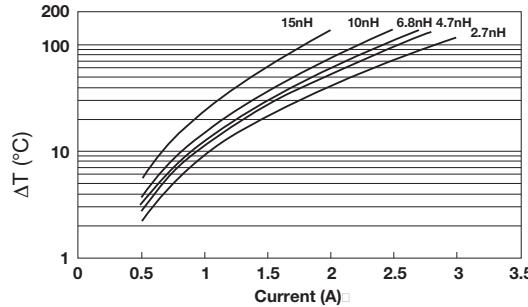

Temperature rise will typically be no higher than shown by the graph

SMD High-Q RF Inductor

FINAL QUALITY INSPECTION


Finished parts are tested for electrical parameters and visual/mechanical characteristics.

Parts are 100% tested for inductance at 450MHz. Parts are 100% tested for R_{DC} . Each production lot is evaluated on a sample basis for:

- Q at test frequency
- Static Humidity Resistance: 85°C, 85% RH, 160 hours
- Endurance: 125°C, I_R , 4 hours

2

ENVIRONMENTAL CHARACTERISTICS

TEST	CONDITIONS	REQUIREMENT
Solderability	Components completely immersed in a solder bath at $235 \pm 5^\circ\text{C}$ for 2 secs.	Terminations to be well tinned. No visible damage.
Leach Resistance	Components completely immersed in a solder bath at $260 \pm 5^\circ\text{C}$ for 60 secs.	Dissolution of termination faces $\leq 15\%$ of area. Dissolution of termination edges $\leq 25\%$ of length.
Storage	12 months minimum with components stored in "as received" packaging.	Good solderability
Shear	Components mounted to a substrate. A force of 5N applied normal to the line joining the terminations and in a line parallel to the substrate.	No visible damage
Rapid Change of Temperature	Components mounted to a substrate. 5 cycles -55°C to $+125^\circ\text{C}$.	No visible damage
Bend Strength	Tested as shown in diagram 	No visible damage
Temperature Coefficient of Inductance (TCL)	Component placed in environmental chamber -55°C to $+125^\circ\text{C}$.	$+0$ to $+125 \text{ ppm}/^\circ\text{C}$ (typical) $\text{TCL} = \frac{L_2 - L_1}{L_1 (T_2 - T_1)} \cdot 10^6$ $T_1 = 25^\circ\text{C}$

HANDLING

SMD chips should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pick-ups is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized. For automatic equipment, taped and reeled product is the ideal medium for direct presentation to the placement machine.

CIRCUIT BOARD TYPE

All flexible types of circuit boards may be used (e.g. FR-4, G-10) and also alumina.

For other circuit board materials, please consult factory.

2

COMPONENT PAD DESIGN

Component pads must be designed to achieve good joints and minimize component movement during soldering.


Pad designs are given below for both wave and reflow soldering.

The basis of these designs is:

- Pad width equal to component width. It is permissible to decrease this to as low as 85% of component width but it is not advisable to go below this.
- Pad overlap about 0.3mm.
- Pad extension about 0.3mm for reflow.
Pad extension about 0.8mm for wave soldering.


WAVE SOLDERING

DIMENSIONS: millimeters (inches)

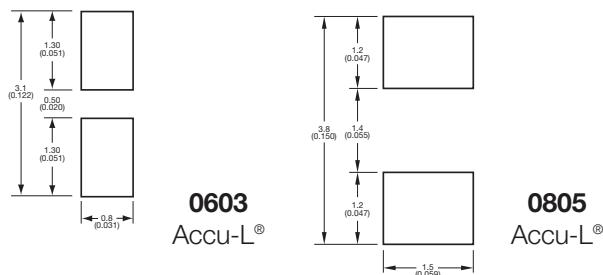

REFLOW SOLDERING

DIMENSIONS: millimeters (inches)

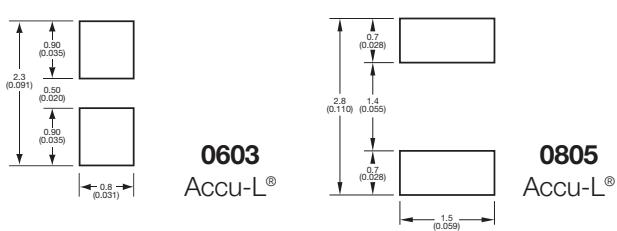

PREHEAT & SOLDERING

The rate of preheat in production should not exceed 4°C/second. It is recommended not to exceed 2°C/second.

Temperature differential from preheat to soldering should not exceed 150°C.

For further specific application or process advice, please consult AVX.

HAND SOLDERING & REWORK

Hand soldering is permissible. Preheat of the PCB to 100°C is required. The most preferable technique is to use hot air soldering tools. Where a soldering iron is used, a temperature controlled model not exceeding 30 watts should be used and set to not more than 260°C. Maximum allowed time at temperature is 1 minute. When hand soldering, the base side (white side) must be soldered to the board.

COOLING

After soldering, the assembly should preferably be allowed to cool naturally. In the event of assisted cooling, similar conditions to those recommended for preheating should be used.

CLEANING RECOMMENDATIONS

Care should be taken to ensure that the devices are thoroughly cleaned of flux residues, especially the space beneath the device. Such residues may otherwise become conductive and effectively offer a lossy bypass to the device. Various recommended cleaning conditions (which must be optimized for the flux system being used) are as follows:

Cleaning liquids	i-propanol, ethanol, acetylacetone, water, and other standard PCB cleaning liquids.
Ultrasonic conditions . .	power – 20w/liter max. frequency – 20kHz to 45kHz.
Temperature	80°C maximum (if not otherwise limited by chosen solvent system).
Time.	5 minutes max.

STORAGE CONDITIONS

Recommended storage conditions for Accu-L® prior to use are as follows:

Temperature.	15°C to 35°C
Humidity	≤65%
Air Pressure	860mbar to 1060mbar

RECOMMENDED SOLDERING PROFILE

For recommended soldering profile see page 23