

Power Entry Modules Bolt-in Rear Terminals

60-BPR & BPS Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Solder lug and Fast-on tab terminals available
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF17)
- UL approved low leakage version also available

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3.



Circuit Diagram

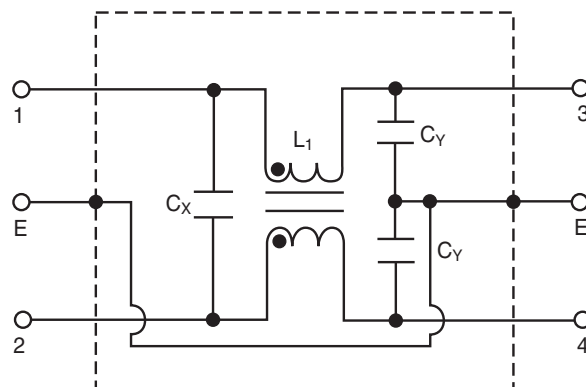

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-XXX-010-3-2	250VAC	1A	0.35mA	2200pF ± 20%	.022uF ± 20%	6.0mH	30°C
60-XXX-010-3-4					.047uF ± 20%		
60-XXX-010-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-010-5-4					.047uF ± 20%		
60-XXX-020-3-2	250VAC	2A	0.35mA	2200pF ± 20%	.022uF ± 20%	2.4mH	30°C
60-XXX-020-3-4					.047uF ± 20%		
60-XXX-020-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-020-5-4					.047uF ± 20%		
60-XXX-030-3-2	250VAC	3A	0.35mA	2200pF ± 20%	.022uF ± 20%	1.2mH	30°C
60-XXX-030-3-4					.047uF ± 20%		
60-XXX-030-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-030-5-4					.047uF ± 20%		
60-XXX-060-3-2	250VAC	6A	0.35mA	2200pF ± 20%	.022uF ± 20%	0.53mH	45°C
60-XXX-060-3-4					.047uF ± 20%		
60-XXX-060-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-060-5-4					.047uF ± 20%		
60-XXX-100-3-2	250VAC	10A	0.35mA	2200pF ± 20%	.022uF ± 20%	0.26mH	45°C
60-XXX-100-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-BPR-150-3-11	250VAC	15A	0.35mA	2200pF ± 20%	.1uF ± 20%	0.15mH	45°C

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 45g
Input: Compatible with IEC-320



* Substitute BPR or BPS for XXX

BPS - Solder lug terminals
BPR - Fast-on tab terminals


Power Entry Modules Bolt-in Rear Terminals

60-BPR & BPS Series


Temperature Characteristics

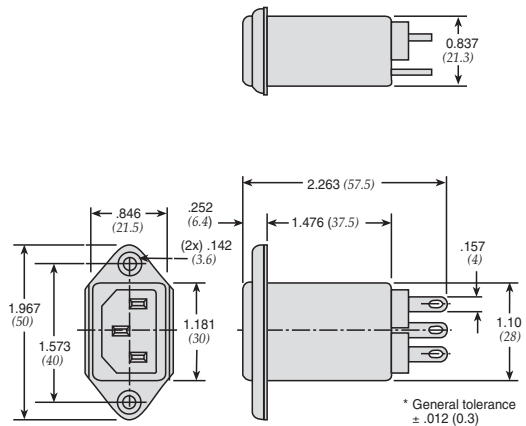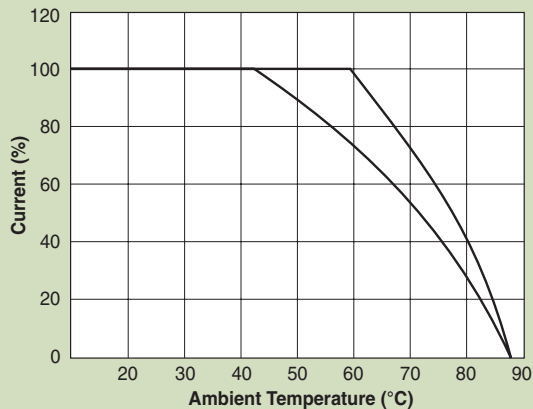


Common Mode

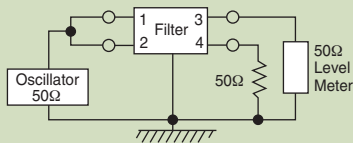


60-BPX-010;-020;-030

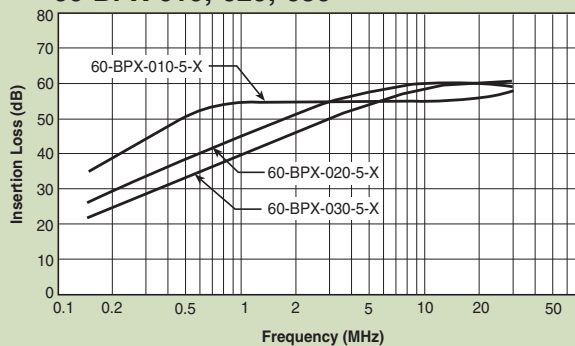


60-BPX-060;-100

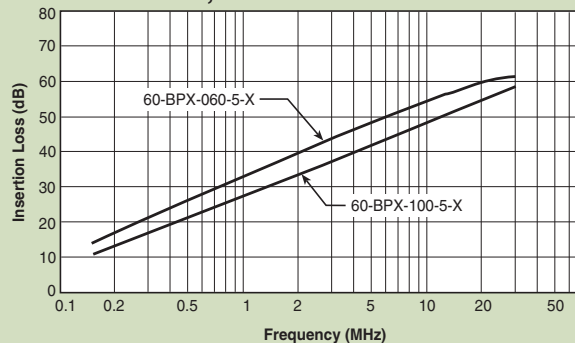


Normal Mode

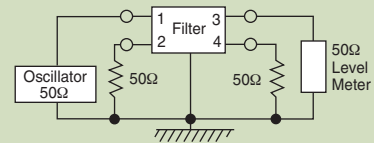

60-BPX-010;-020;-030

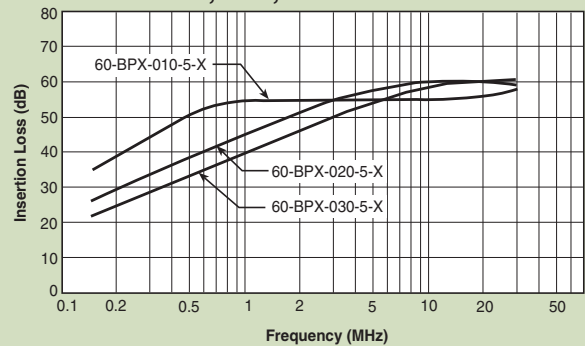

60-BPX-060;-100

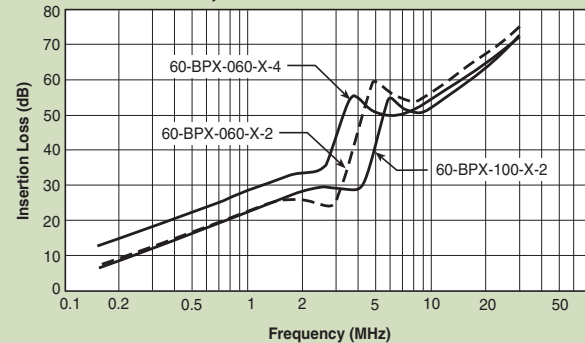

Power Entry Modules Bolt-in Right Angle Terminals

60-BPF Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- PCB mounting types available (see page PF46)
- Length under tab is shortened for small spaces
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF19)
- UL approved low leakage version also available

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3.



Circuit Diagram

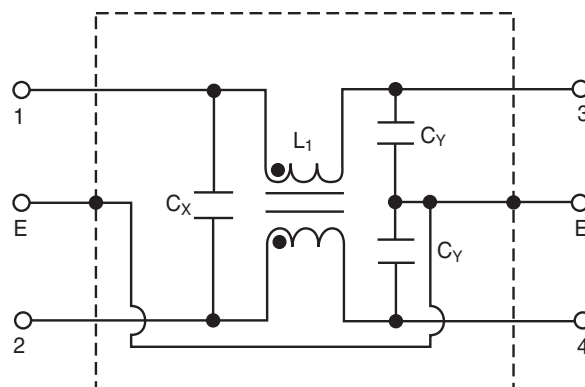

Specifications


Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-BPF-010-3-2	250VAC	1A	0.35mA	2200pF ± 20%	.022uF ± 20%	6.0mH	30°C
60-BPF-010-3-4					.047uF ± 20%		
60-BPF-010-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-BPF-010-5-4					.047uF ± 20%		
60-BPF-020-3-2	250VAC	2A	0.35mA	2200pF ± 20%	.022uF ± 20%	2.4mH	30°C
60-BPF-020-3-4					.047uF ± 20%		
60-BPF-020-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-BPF-020-5-4					.047uF ± 20%		
60-BPF-030-3-2	250VAC	3A	0.35mA	2200pF ± 20%	.022uF ± 20%	1.2mH	30°C
60-BPF-030-3-4					.047uF ± 20%		
60-BPF-030-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-BPF-030-5-4					.047uF ± 20%		
60-BPF-060-3-2	250VAC	6A	0.35mA	2200pF ± 20%	.022uF ± 20%	0.53mH	45°C
60-BPF-060-3-4					.047uF ± 20%		
60-BPF-060-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-BPF-060-5-4					.047uF ± 20%		

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320


Power Entry Modules Bolt-in Right Angle Terminals

60-BPF Series

Temperature Characteristics

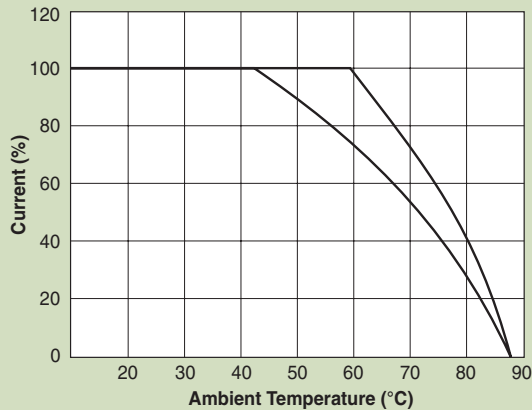


60-BPF Fast-on Terminals

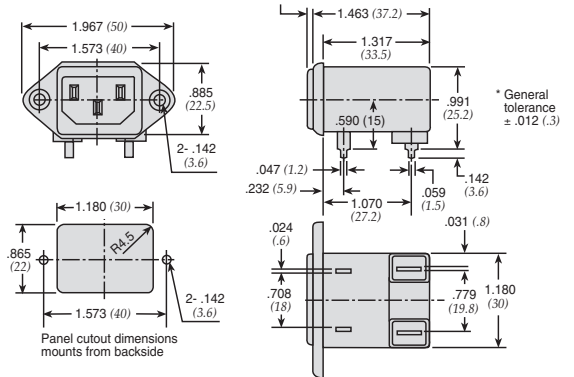


Dimensions in inches (mm)


Common Mode

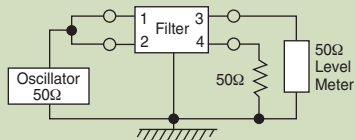


60-BPF-010;-020

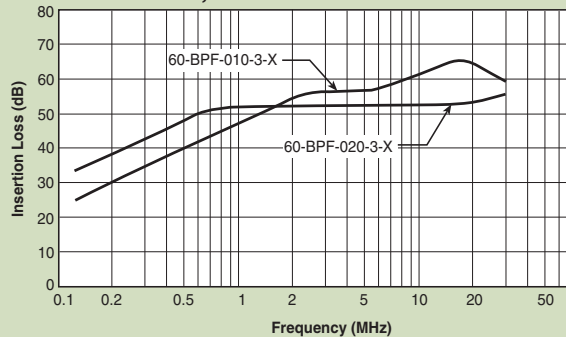


60-BPF-030;-060

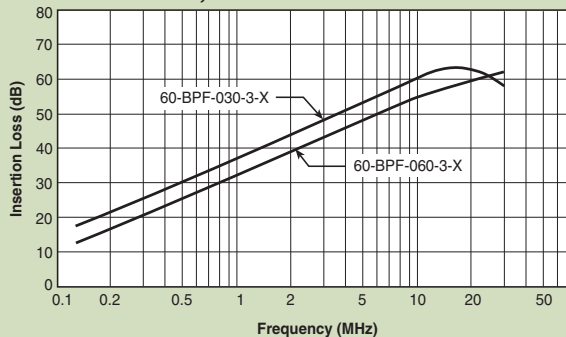


Normal Mode

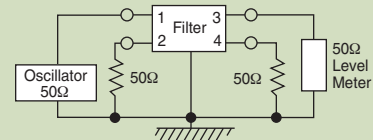

60-BPF-010;-020

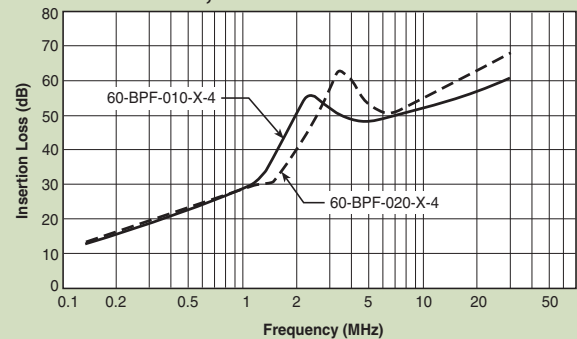

60-BPF-030;-060

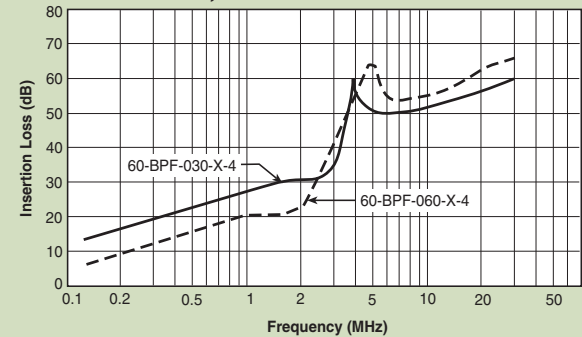

Power Entry Modules High Frequency Attenuation

60-BHS Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal cased miniature filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- PCB mounting types available (see page PF48)
- PCB mounting minimizes space and provides economical installation
- Excellent filtering characteristics for high frequencies
- Earth coil standard
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF21)

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3.



Circuit Diagram

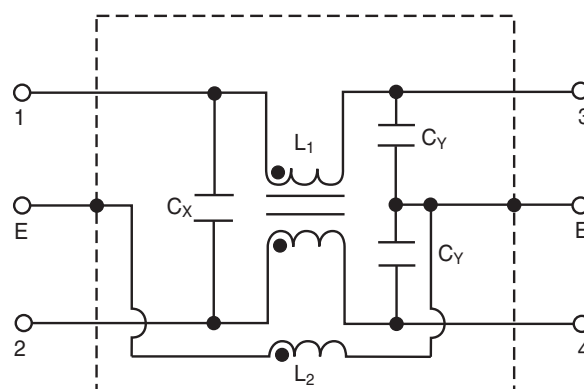

Specifications



Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁) (L ₂)		Temperature Rise (Max.)
				C _Y	C _X			
60-BHS-010-3-11	250VAC	1A	0.35mA	2200pF ± 20%	0.1uF ± 20%	6mH	18.3uH	30°C
60-BHS-010-3-4					.047uF ± 20%			
60-BHS-010-5-11			0.50mA	3300pF ± 20%	0.1uF ± 20%			
60-BHS-010-5-4					.047uF ± 20%			
60-BHS-020-3-11	250VAC	2A	0.35mA	2200pF ± 20%	0.1uF ± 20%	2.4mH	18.3uH	30°C
60-BHS-020-3-4					.047uF ± 20%			
60-BHS-020-5-11			0.50mA	3300pF ± 20%	0.1uF ± 20%			
60-BHS-020-5-4					.047uF ± 20%			
60-BHS-030-3-11	250VAC	3A	0.35mA	2200pF ± 20%	0.1uF ± 20%	1.2mH	18.3uH	30°C
60-BHS-030-3-4					.047uF ± 20%			
60-BHS-030-5-11			0.50mA	3300pF ± 20%	0.1uF ± 20%			
60-BHS-030-5-4					.047uF ± 20%			
60-BHS-060-3-11	250VAC	6A	0.35mA	2200pF ± 20%	0.1uF ± 20%	.53mH	18.3uH	45°C
60-BHS-060-3-4					.047uF ± 20%			
60-BHS-060-5-11			0.50mA	3300pF ± 20%	0.1uF ± 20%			
60-BHS-060-5-4					.047uF ± 20%			

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320


Power Entry Modules High Frequency Attenuation

60-BHS Series


Temperature Characteristics

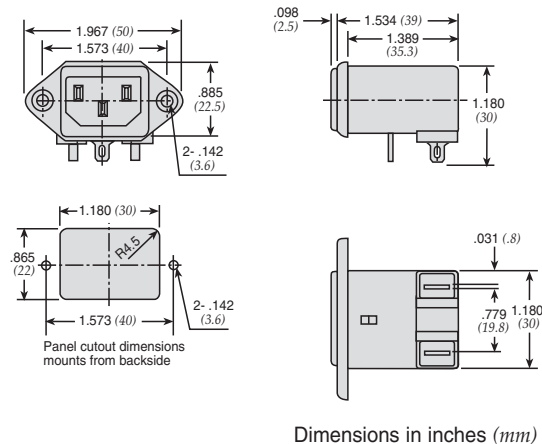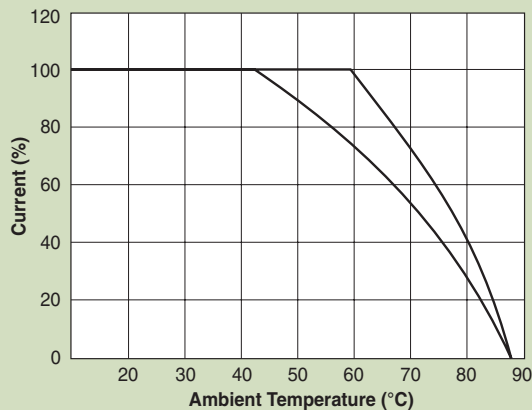


Common Mode

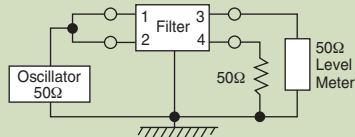


60-BHS-XXX-X-11

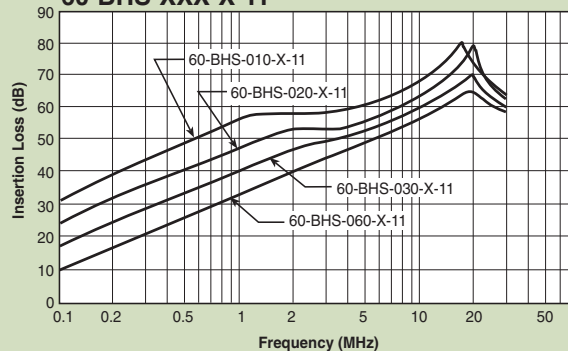


60-BHS-XXX-X-4

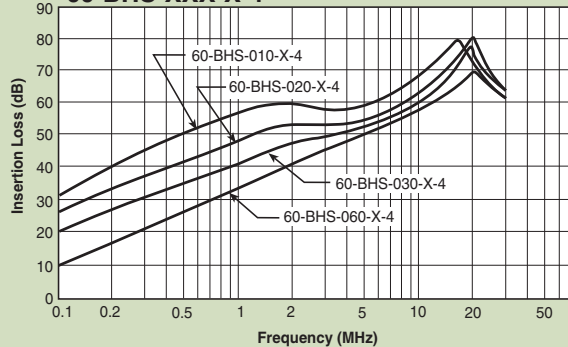


Normal Mode

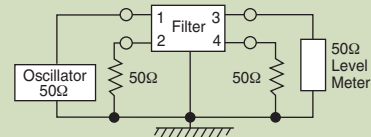

60-BHS-XXX-3-11

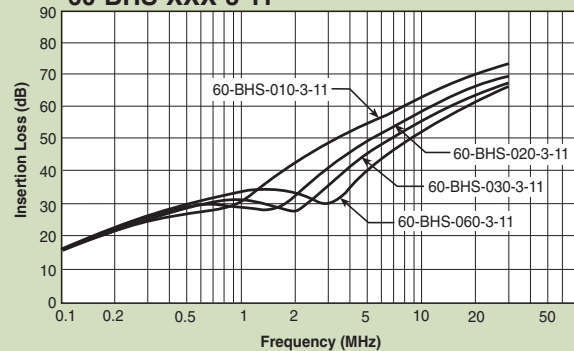

60-BHS-XXX-3-4

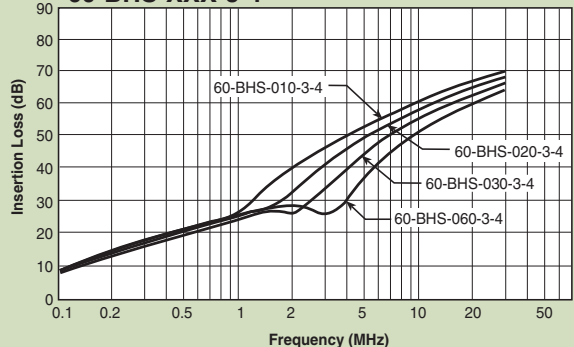

Power Entry Modules Bolt-in Rear Terminals For General Purpose Applications

10-BPF Series



Features


- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Operating temperature: -25°C to +70°C
- Compact configuration

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Circuit Diagram

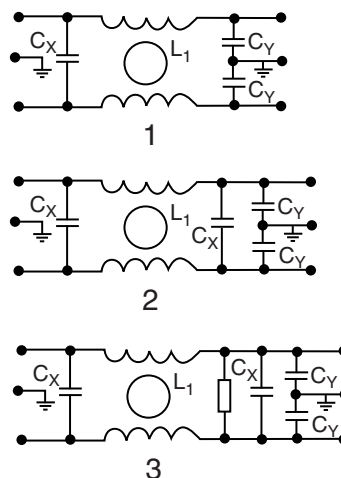

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Circuit Diagram	Figure	Temperature Rise (Max.)
				C _Y	C _X				
10-BPF-001-5-A	120/250VAC	1A	0.50mA	3300pF	2200pF	3.0mH	1	A	30°C
10-BPF-001-5-C								C	
10-BPF-003-5-A		3A		0.01uF	1.5mH	2	A		
10-BPF-003-5-C							C		
10-BPF-003-5-D		6A		3300pF	0.5mH	1	A		
10-BPF-006-5-A							C		
10-BPF-006-5-C		10A		3300pF & 0.01uF	3300pF & 0.01uF	1.5mH	2	B	
10-BPF-006-5-D				3300pF	0.01uF	0.5mH	1	A	
10-BPF-010-5-A				3300pF & 0.01uF	3300pF & 0.01uF	1.5mH	3	B	
10-BPF-010-5-D									

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 45g
Input: Compatible with IEC-320

Power Entry Modules Bolt-in Rear Terminals For General Purpose Applications

10-BPF Series

Figure A

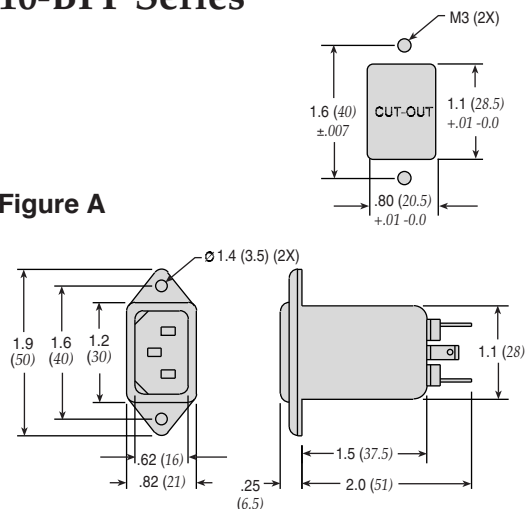


Figure B



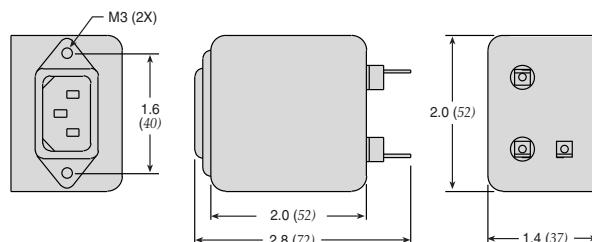


Figure C

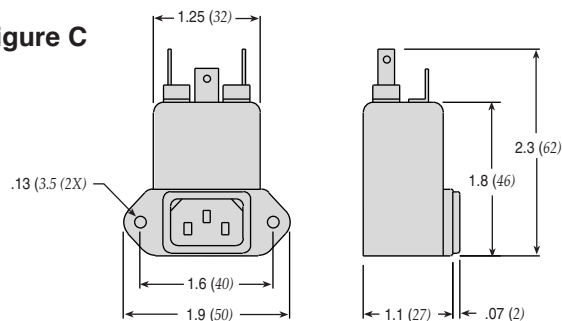


Dimensions in inches (mm)


Common Mode

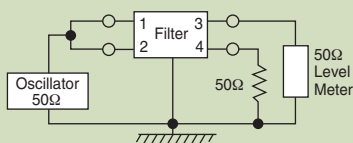


10-BPF-001;-003

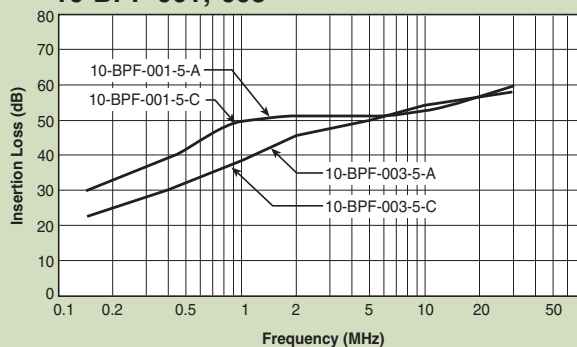


10-BPF-006;-010

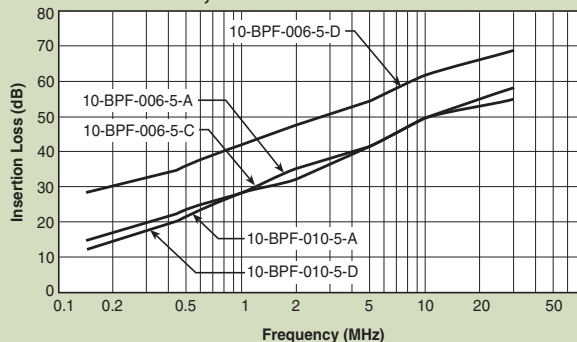


Normal Mode

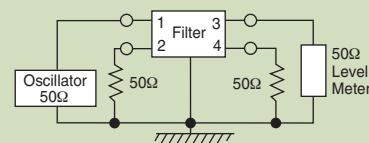

10-BPF-001;-003

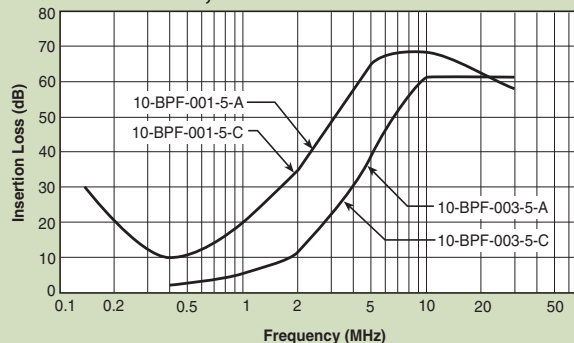

10-BPF-006;-010

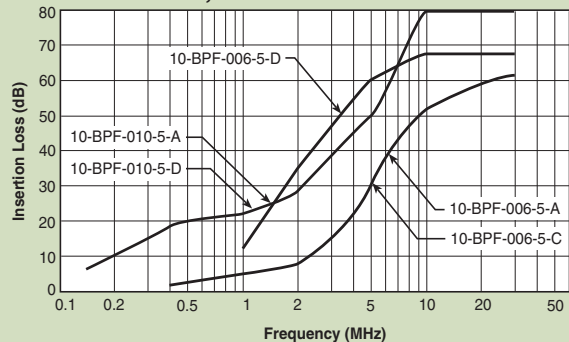

Power Entry Modules Bolt-in Rear Terminals For Medical Purpose Applications

10-BPF Series



Features


- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Operating temperature: -25°C to +70°C
- Compact configuration
- Low leakage current

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Circuit Diagram

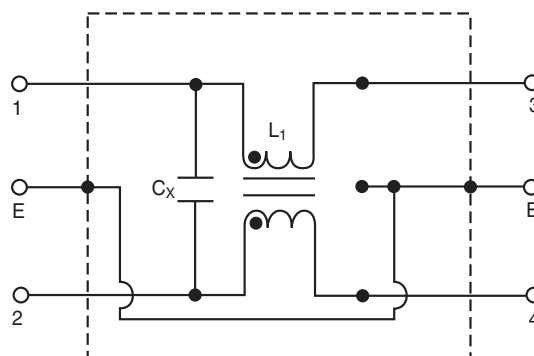

Specifications


Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance C_x	Inductance (L_1)	Circuit Diagram	Figure	Temperature Rise (Max.)
10-BPF-001-2-A	120/250VAC	1A	5uA	0.01uF	3.0mH	1	A	30°C
10-BPF-003-2-A		3A			1.5mH			
10-BPF-006-2-A		6A			0.5mH			

Note: Test voltage: 1500VAC one minute, line to ground
 Insulation resistance: 300 Mohm min. at 500VDC
 Voltage drop: 1V max. at rated current
 Weight: 45g
 Input: Compatible with IEC-320


Power Entry Modules Bolt-in Rear Terminals

For Medical Purpose Applications


10-BPF Series

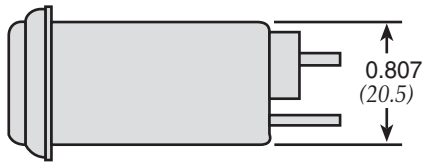


Dimensions in inches (mm)

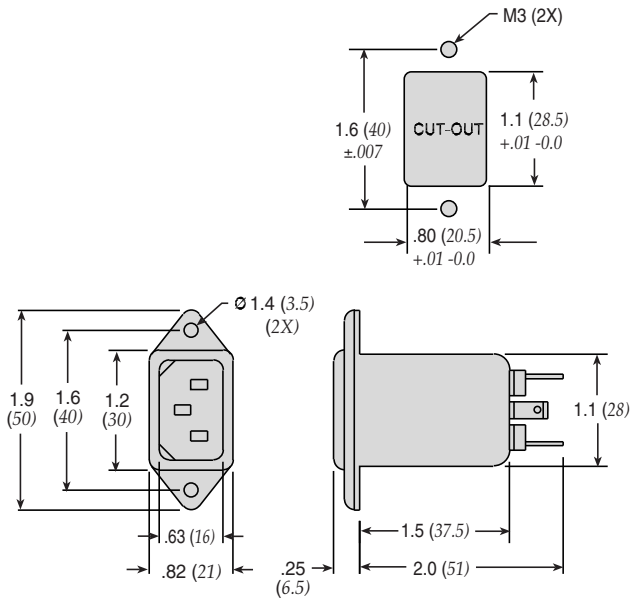


Common Mode

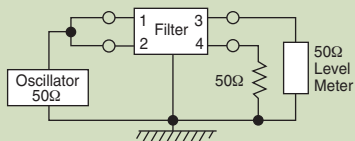


10-BPF-001;-003;-006

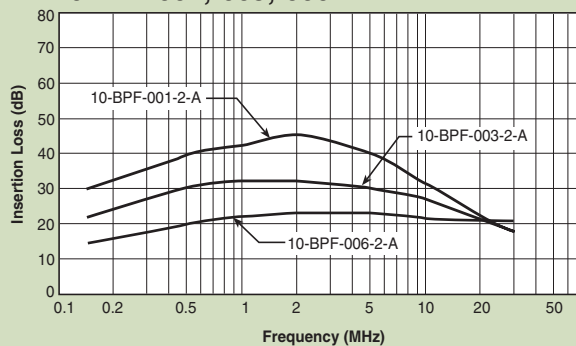

Normal Mode

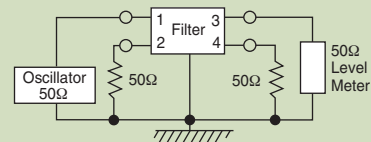

10-BPF-001;-003;-006

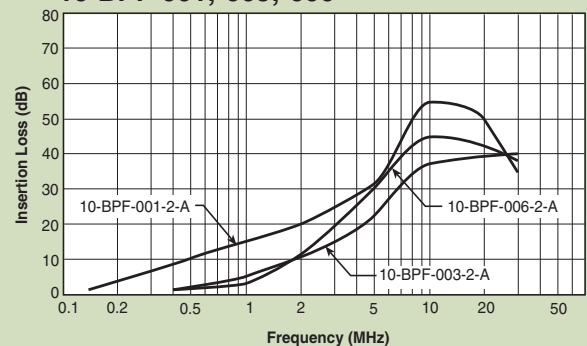

Power Entry Modules Bolt-in with Wire Leads

60-SPL Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal cased miniature filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Snap-in style saves labor and hardware inventory
- Wire output minimizes space and provides economical installation
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF27)

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3.



Circuit Diagram

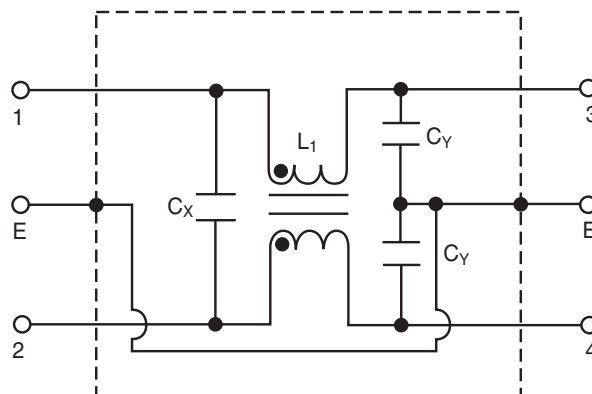

Specifications



Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-SPL-010-3-2	250VAC	1A	0.35mA	2200pF ± 20%	22nF ± 20%	6.0mH	30°C
60-SPL-010-3-3					33nF ± 20%		
60-SPL-010-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-SPL-010-5-3					33nF ± 20%		
60-SPL-020-3-2	250VAC	2A	0.35mA	2200pF ± 20%	22nF ± 20%	2.4mH	30°C
60-SPL-020-3-3					33nF ± 20%		
60-SPL-020-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-SPL-020-5-3					33nF ± 20%		
60-SPL-030-3-2	250VAC	3A	0.35mA	2200pF ± 20%	.022uF ± 20%	1.2mH	30°C
60-SPL-030-3-3				3300pF ± 20%			
60-SPL-030-5-2			0.50mA	2200pF ± 20%	.033uF ± 20%		
60-SPL-030-5-3				3300pF ± 20%			
60-SPL-060-3-2	250VAC	6A	0.35mA	2200pF ± 20%	22nF ± 20%	0.53mH	45°C
60-SPL-060-3-3					33nF ± 20%		
60-SPL-060-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-SPL-060-5-3					33nF ± 20%		

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320


Power Entry Modules Snap-in with Wire Leads

60-SPL Series


Temperature Characteristics

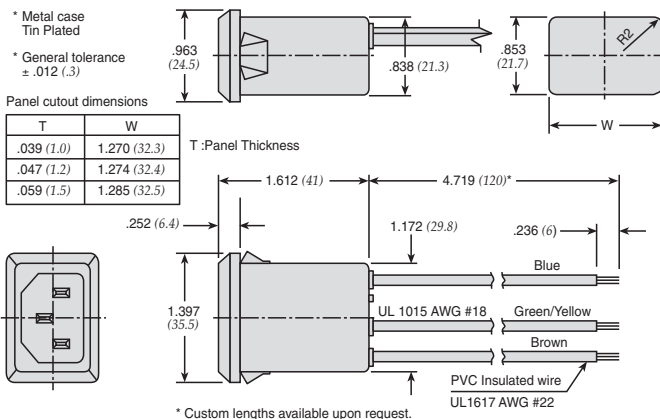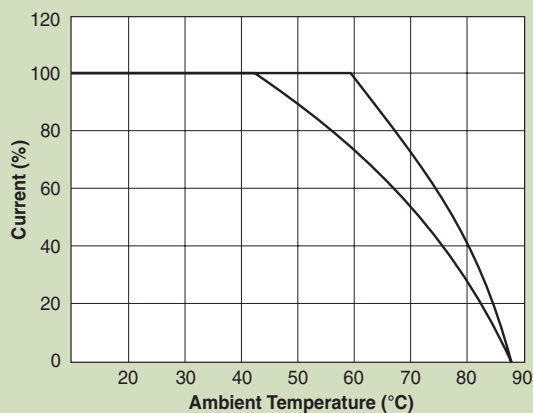


Common Mode

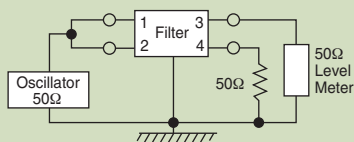


60-SPL-010;-020

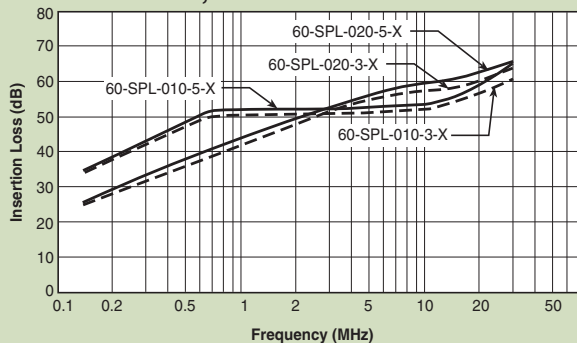


60-SPL-030;-060

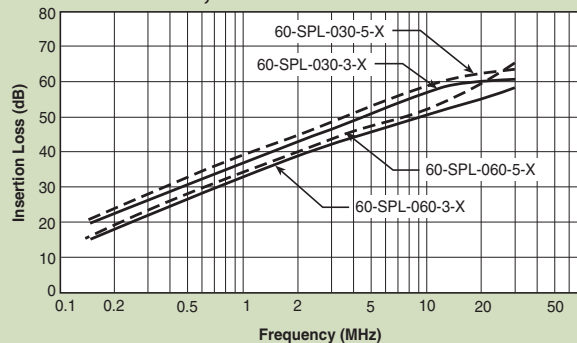


Normal Mode

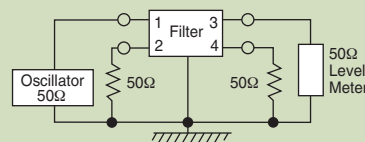

60-SPL-010;-020

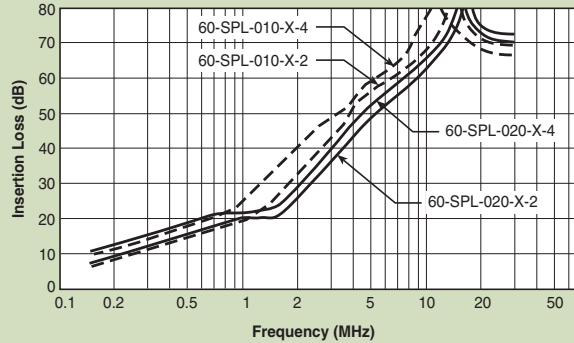

60-SPL-030;-060

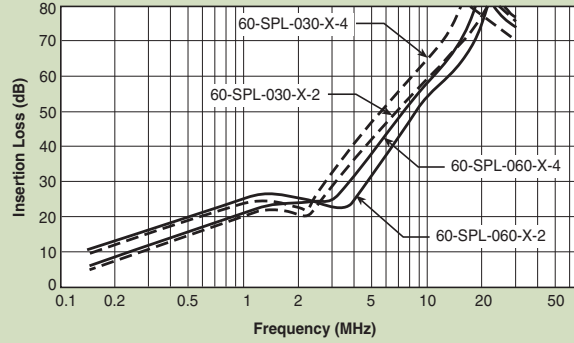

Power Entry Modules Bolt-in with Wire Leads

60-BPL Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Wire output for minimizing space use and economical installation
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF28)

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3.



Circuit Diagram

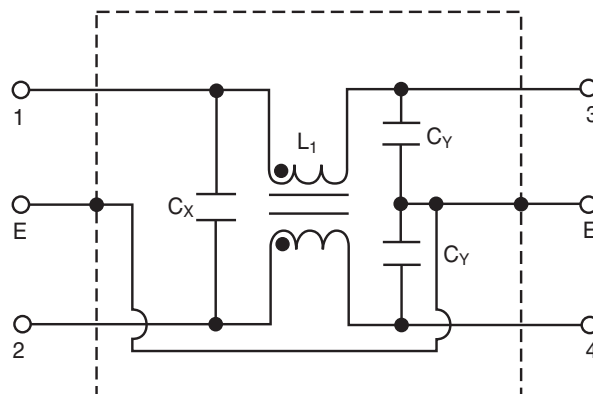

Specifications



Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-BPL-010-3-2	250VAC	1A	0.35mA	2200pF ± 20%	22nF ± 20%	6.0mH	30°C
60-BPL-010-3-3					33nF ± 20%		
60-BPL-010-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-BPL-010-5-3					33nF ± 20%		
60-BPL-020-3-2	250VAC	2A	0.35mA	2200pF ± 20%	22nF ± 20%	2.4mH	30°C
60-BPL-020-3-3					33nF ± 20%		
60-BPL-020-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-BPL-020-5-3					33nF ± 20%		
60-BPL-030-3-2	250VAC	3A	0.35mA	2200pF ± 20%	.022uF ± 20%	1.2mH	30°C
60-BPL-030-3-3				3300pF ± 20%			
60-BPL-030-5-2			0.50mA	2200pF ± 20%	.033uF ± 20%		
60-BPL-030-5-3				3300pF ± 20%			
60-BPL-060-3-2	250VAC	6A	0.35mA	2200pF ± 20%	22nF ± 20%	0.53mH	45°C
60-BPL-060-3-3					33nF ± 20%		
60-BPL-060-5-2			0.50mA	3300pF ± 20%	22nF ± 20%		
60-BPL-060-5-3					33nF ± 20%		

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320

Power Entry Modules Bolt-in with Wire Leads


60-BPL Series

Temperature Characteristics

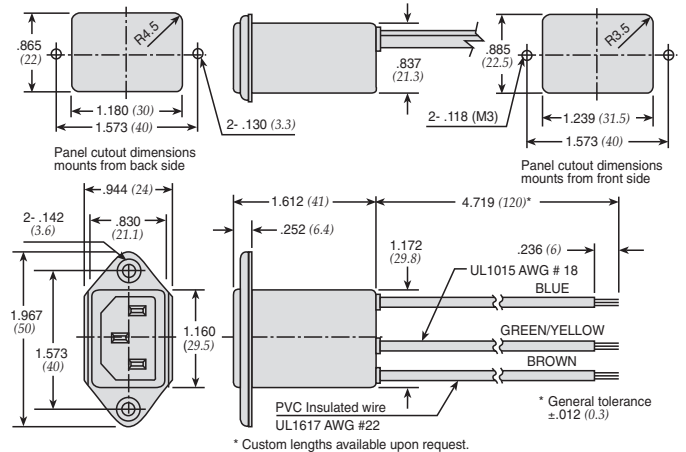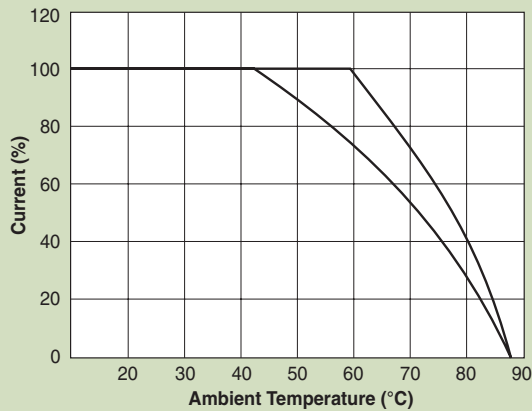


Dimensions in inches (mm)


Common Mode

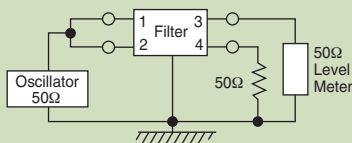


60-BPL-010;-020

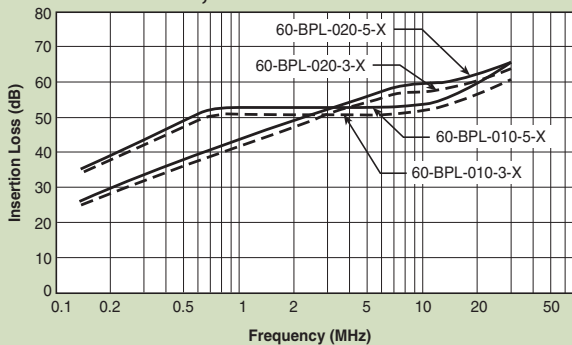


60-BPL-030;-060

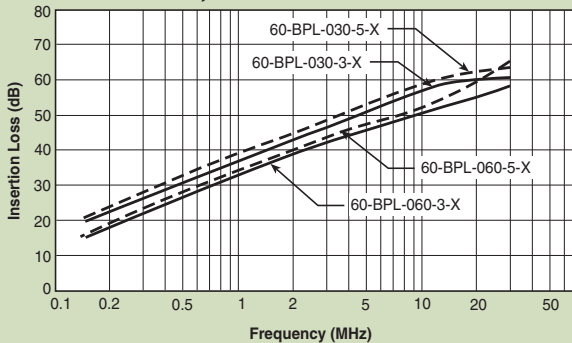


Normal Mode

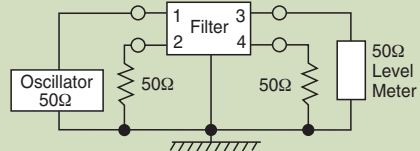

60-BPL-010;-020

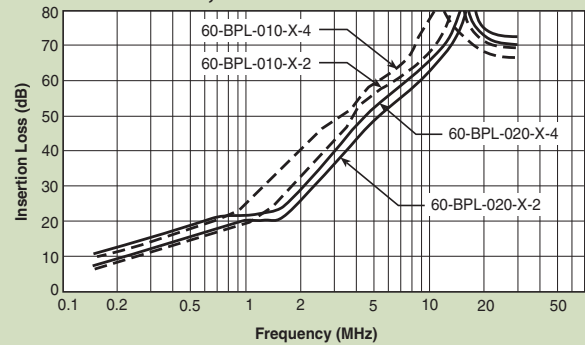

60-BPL-030;-060

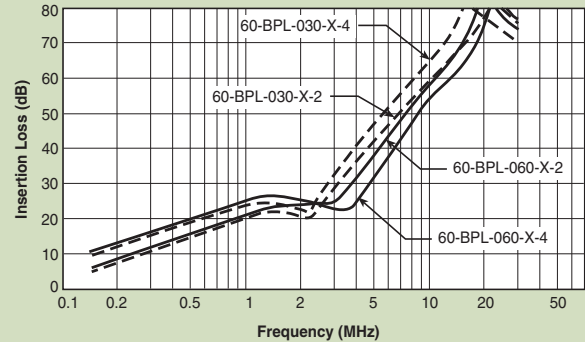

Power Entry Modules Bolt-in with Wire Leads

10-BPL Series



Features


- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Wire output for minimizing space use and economical installation
- Operating temperature: -25°C to +70°C
- Compact configuration

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Circuit Diagram

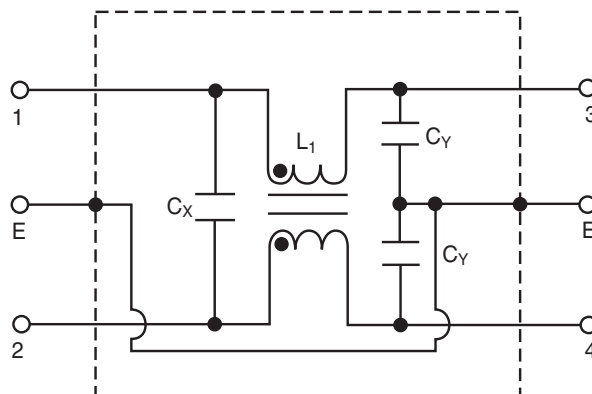

Specifications


Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Circuit Diagram	Figure	Temperature Rise (Max.)
				C _Y	C _X				
10-BPL-001-5-B	250VAC	1A	0.50mA	3300pF	0.01uF	3.0mH	1	A	30°C
10-BPL-003-5-B		3A				1.5mH			
10-BPL-006-5-B		6A				0.5mH			

Note: Test voltage: 1500VAC one minute, line to ground
 Insulation resistance: 300 Mohm min. at 500VDC
 Voltage drop: 1V max. at rated current
 Weight: 50g
 Input: Compatible with IEC-320


Power Entry Modules Bolt-in with Wire Leads

10-BPL Series


Figure A

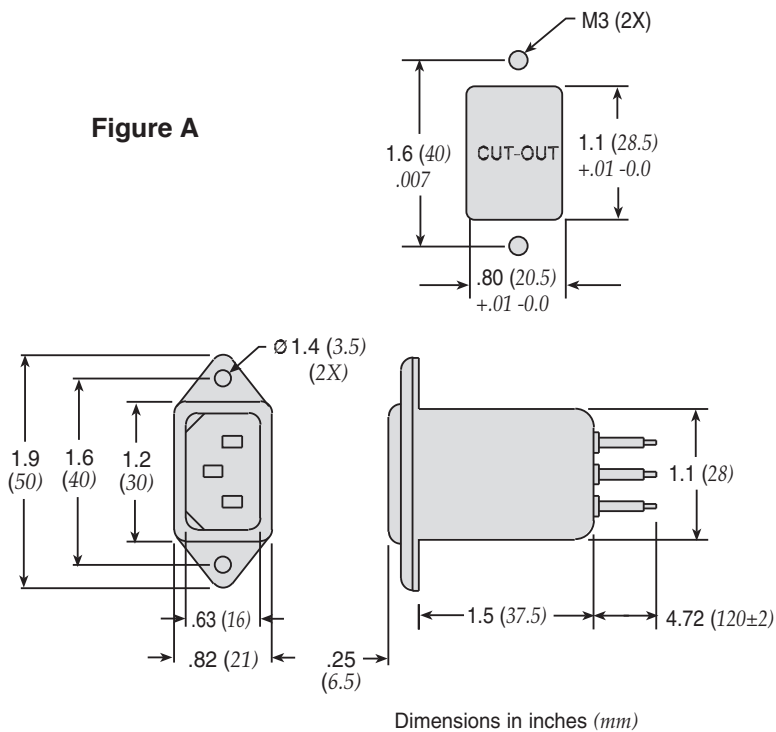


Common Mode

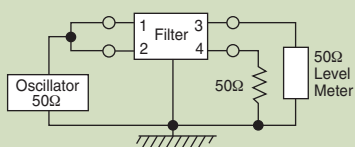


10-BPL-001;-003;-006

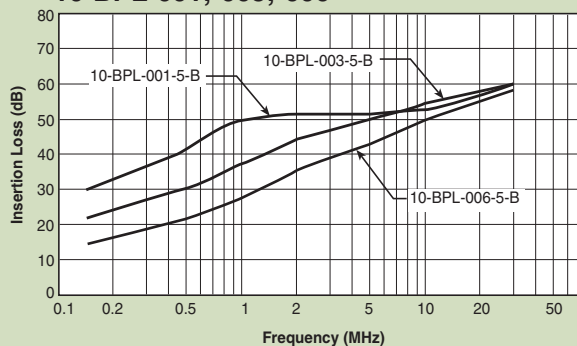

Normal Mode

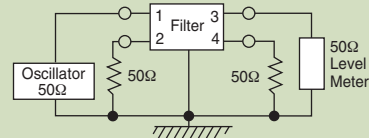

10-BPL-001;-003;-006

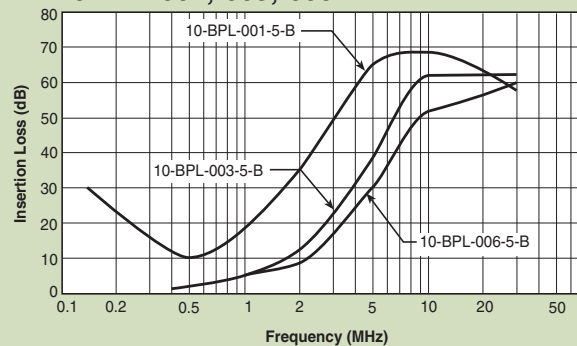

Power Entry Modules Snap-in Mount

60-SPR & SPS Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal cased miniature filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Snap-in style saves labor and hardware inventory
- Solder lug and fast-on tab terminations available
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF33)
- UL approved low leakage version also available

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-XXX-010-3-2	250VAC	1A	0.35mA	2200pF ± 20%	.022uF ± 20%	6.0mH	30°C
60-XXX-010-3-4					.047uF ± 20%		
60-XXX-010-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-010-5-4					.047uF ± 20%		
60-XXX-020-3-2	250VAC	2A	0.35mA	2200pF ± 20%	.022uF ± 20%	2.4mH	30°C
60-XXX-020-3-4					.047uF ± 20%		
60-XXX-020-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-020-5-4					.047uF ± 20%		
60-XXX-030-3-2	250VAC	3A	0.35mA	2200pF ± 20%	.022uF ± 20%	1.2mH	30°C
60-XXX-030-3-4					.047uF ± 20%		
60-XXX-030-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-030-5-4					.047uF ± 20%		
60-XXX-060-3-2	250VAC	6A	0.35mA	2200pF ± 20%	.022uF ± 20%	0.53mH	45°C
60-XXX-060-3-4					.047uF ± 20%		
60-XXX-060-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-XXX-060-5-4					.047uF ± 20%		
60-XXX-100-3-2	250VAC	10A	0.35mA	2200pF ± 20%	.022uF ± 20%	0.26mH	45°C
60-XXX-100-5-2			0.50mA	3300pF ± 20%	.022uF ± 20%		
60-SPR-150-3-11	250VAC	15A	0.35mA	2200pF ± 20%	.1uF ± 20%	0.15mH	45°C

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 45g
Input: Compatible with IEC-320


* Substitute SPR or SPS for XXX

60-SPR - Fast-on terminals

60-SPS - Solder lug terminals





Circuit Diagram

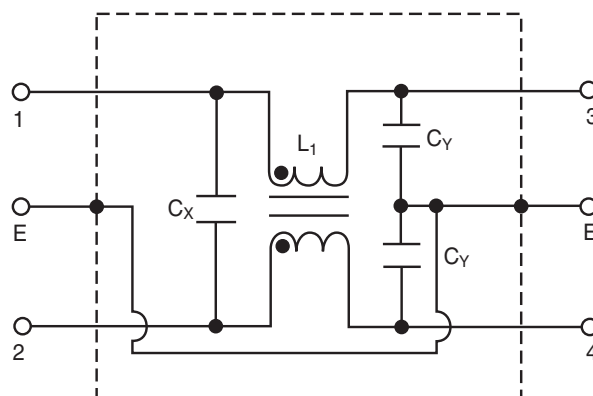


Power Entry Modules Snap-in Mount

60-SPR & SPS Series


Temperature Characteristics

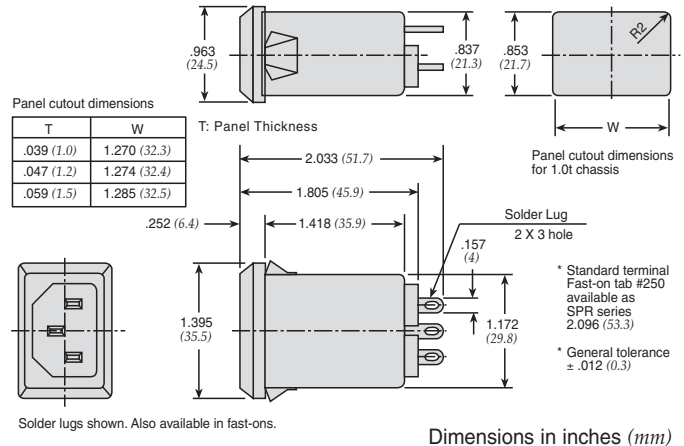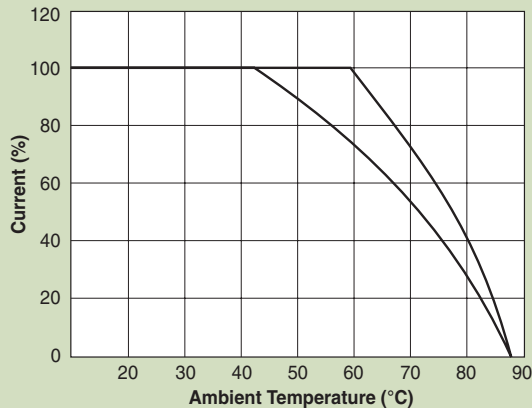


Common Mode

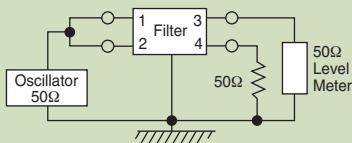


60-SPX-010;-020;-030

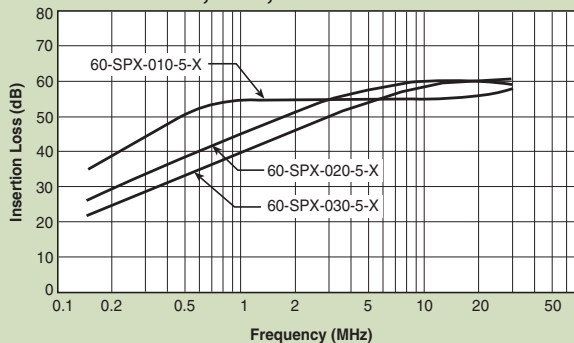


60-SPX-060;-100

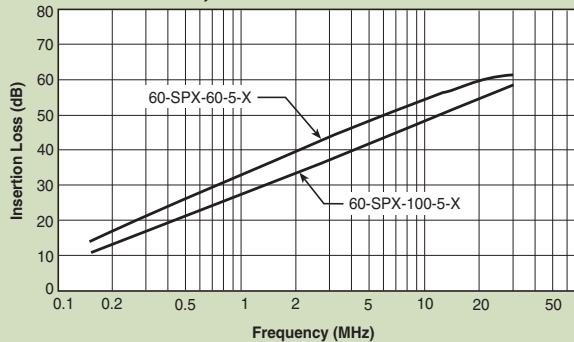


Normal Mode

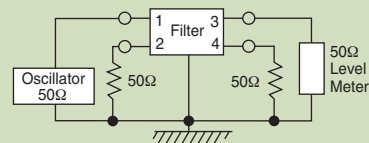

60-SPX-010;-020;-030

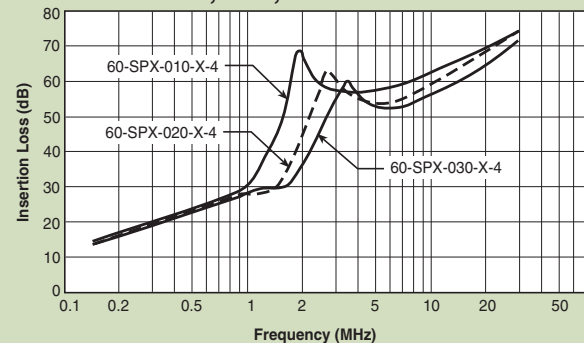

60-SPX-060;-100

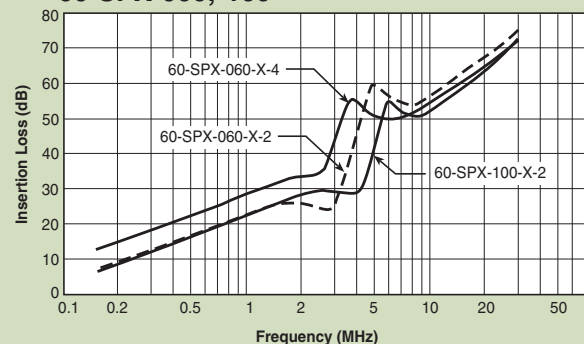

Fused Filtered Power Entry Modules

For General Purpose Applications

64-65-BFF/64-65-BFS Series



Tested and found to be
IAW VDE 0565 Part 3.

Features

- North American and Metric fuse holders available
- Fuse holder provides effective EMI suppression of common and differential mode
- Suitable for products that must conform to FCC and FTZ requirements
- Meets over voltage category II of IEC 664 and complies with IEC 950
- Fast-on terminals or solder lug terminals
- Metal case provides effective EMI shielding
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF35)

Applications

- Computers and peripheral equipment
- Electronic equipment
- Digital equipment
- Measuring and testing instruments
- Telecommunications equipment

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
64-XXX-020-3-11	250VAC	2A	0.35mA	2200pF ± 20%	0.1uF	6.5mH	40°C
64-XXX-020-5-11			0.50mA	3300pF ± 20%			
64-XXX-020-3-12			0.35mA	2200pF ± 20%	0.22uF		
64-XXX-020-5-12			0.50mA	3300pF ± 20%			
64-XXX-040-3-11	250VAC	4A	0.35mA	2200pF ± 20%	0.1uF	4.2mH	45°C
64-XXX-040-5-11			0.50mA	3300pF ± 20%			
64-XXX-040-3-12			0.35mA	2200pF ± 20%	0.22uF		
64-XXX-040-5-12			0.50mA	3300pF ± 20%			
64-XXX-060-3-11	250VAC	6A	0.35mA	2200pF ± 20%	0.1uF	1.6mH	45°C
64-XXX-060-5-11			0.50mA	3300pF ± 20%			
64-XXX-060-3-12			0.35mA	2200pF ± 20%	0.22uF		
64-XXX-060-5-12			0.50mA	3300pF ± 20%			
65-XXX-020-3-11	125VAC	2A	0.20mA	2200pF ± 20%	0.1uF	6.5mH	40°C
65-XXX-020-5-11			0.25mA	3300pF ± 20%			
65-XXX-020-3-12			0.20mA	2200pF ± 20%	0.22uF		
65-XXX-020-5-12			0.25mA	3300pF ± 20%			
65-XXX-040-3-11	125VAC	4A	0.20mA	2200pF ± 20%	0.1uF	4.2mH	45°C
65-XXX-040-5-11			0.25mA	3300pF ± 20%			
65-XXX-040-3-12			0.20mA	2200pF ± 20%	0.22uF		
65-XXX-040-5-12			0.25mA	3300pF ± 20%			
65-XXX-060-3-11	125VAC	6A	0.20mA	2200pF ± 20%	0.1uF	1.6mH	45°C
65-XXX-060-5-11			0.25mA	3300pF ± 20%			
65-XXX-060-3-12			0.20mA	2200pF ± 20%	0.22uF		
65-XXX-060-5-12			0.25mA	3300pF ± 20%			


Note: Test Voltage 1500VAC one minute, line to ground
Insulation Resistance: 300 MΩ min. at 500VDC
F(S) = Fast-on or (Solder lug terminals)

Voltage Drop: 1V max. at rated current
Weight: 78g
Inlet: Compatible with IEC-320

* **Substitute BFF or BFS for XXX**
BFF - Fast-on terminals
BFS - Solder lug terminals



Circuit Diagram

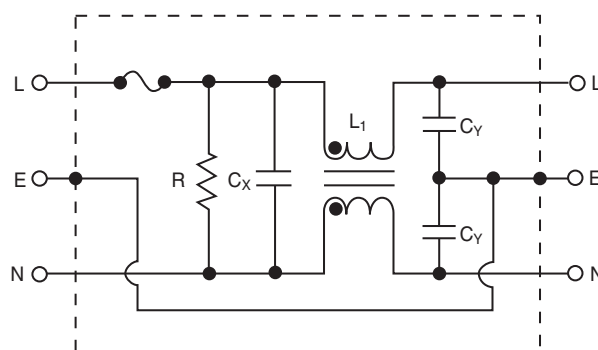


Fused Filtered Power Entry Modules


For General Purpose Applications

64-65-BFF/64-65-BFS Series


Temperature Characteristics

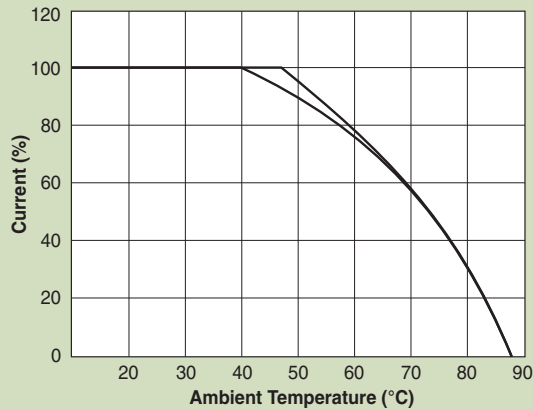


Dimensions 64/65-BFF Series

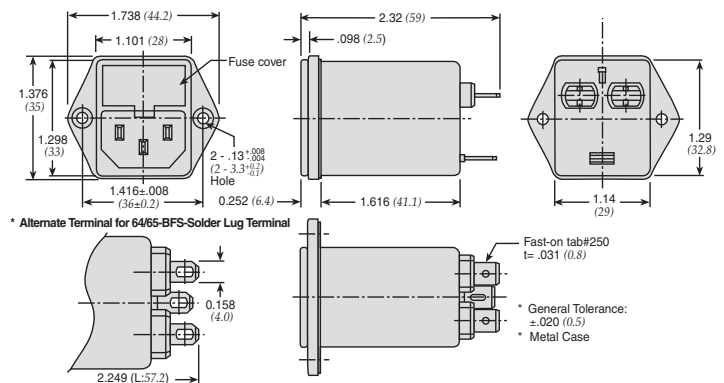


Common Mode

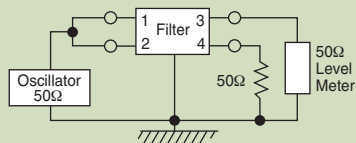


0.50 mA Leakage Versions

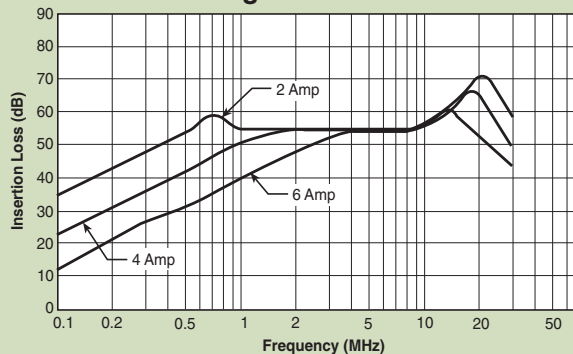


0.35 mA Leakage Versions

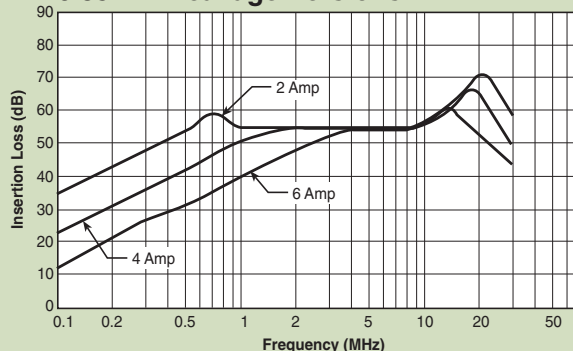


Normal Mode

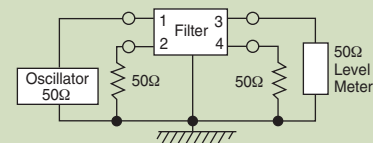

0.50 mA Leakage Versions

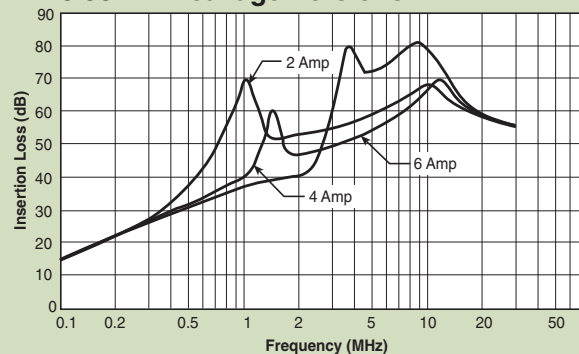

0.35 mA Leakage Versions

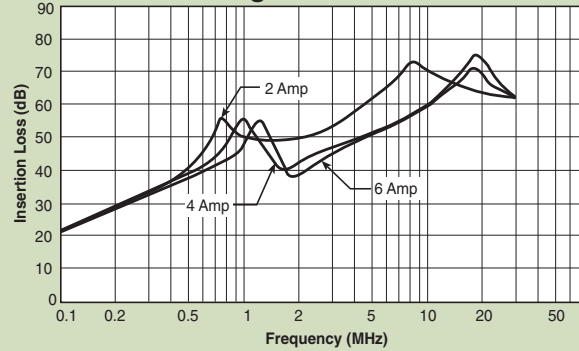

Fused Filtered Power Entry Modules

For Medical or General Purpose Applications

66-67-BFF/66-67-BFS Series



Tested and found to be
IAW VDE 0565 Part 3.

Features

- Metric and North American fuse holders available
- Fuse holder provides effective EMI suppression of common and differential mode
- Suitable for products that must conform to FCC and FTZ requirements
- Meets over voltage category II of IEC 664 and complies with IEC 950
- Fast-on terminations or solder lug terminations
- Metal case provides effective EMI shielding
- Provides susceptibility protection without the leakage current associated with line-to-ground capacitance
- Reduces the line to ground capacitance in order to meet patient care requirements
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF37)

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _V	C _X		
66-XXX-020-1-11	250VAC	2A	0.01mA	none	0.1uF	6.5mH	40°C
66-XXX-020-1-12					0.22uF		
66-XXX-020-0-11					0.075mA		
66-XXX-020-4-11					330pF ± 20%		
66-XXX-020-0-12					470pF ± 20%		
66-XXX-020-4-12					330pF ± 20%		
66-XXX-040-1-11	250VAC	4A	0.01mA	none	0.1uF	2.4mH	45°C
66-XXX-040-1-12					0.22uF		
66-XXX-040-0-11					0.075mA		
66-XXX-040-4-11					330pF ± 20%		
66-XXX-040-0-12					470pF ± 20%		
66-XXX-040-4-12					330pF ± 20%		
66-XXX-060-1-11	250VAC	6A	0.01mA	none	0.1uF	1.6mH	45°C
66-XXX-060-1-12					0.22uF		
66-XXX-060-0-11					0.075mA		
66-XXX-060-4-11					330pF ± 20%		
66-XXX-060-0-12					470pF ± 20%		
66-XXX-060-4-12					330pF ± 20%		
67-XXX-020-1-11	125VAC	2A	0.005mA	none	0.1uF	6.5mH	40°C
67-XXX-020-1-12					0.22uF		
67-XXX-020-0-11					0.035mA		
67-XXX-020-4-11					330pF ± 20%		
67-XXX-020-0-12					470pF ± 20%		
67-XXX-020-4-12					330pF ± 20%		
67-XXX-040-1-11	125VAC	4A	0.005mA	none	0.1uF	2.4mH	45°C
67-XXX-040-1-12					0.22uF		
67-XXX-040-0-11					0.035mA		
67-XXX-040-4-11					330pF ± 20%		
67-XXX-040-0-12					470pF ± 20%		
67-XXX-040-4-12					330pF ± 20%		
67-XXX-060-1-11	125VAC	6A	0.005mA	none	0.1uF	1.6mH	45°C
67-XXX-060-1-12					0.22uF		
67-XXX-060-0-11					0.035mA		
67-XXX-060-4-11					330pF ± 20%		
67-XXX-060-0-12					470pF ± 20%		
67-XXX-060-4-12					330pF ± 20%		

Note: Test Voltage 1500VAC one minute, line to ground
Insulation Resistance: 300 MΩ min. at 500VDC
F(S) = Fast-on or (Solder lug terminals)

Voltage Drop: 1V max. at rated current
Weight: 78g
Inlet: Compatible with IEC-320

* **Substitute BFF or BFS for XXX**
BFF - Fast-on terminals
BFS - Solder lug terminals




Applications


- Medical equipment
- Electronic equipment
- Digital equipment
- Industrial equipment
- Telecommunications equipment
- Measuring and testing instruments
- Personal computers and peripherals

Circuit Diagrams

66/67-BFF(S)-XXX-1-X Filter



66/67-BFF(S)-XXX-0-X and
66/67-BFF(S)-XXX-4-X Filters




Fused Filtered Power Entry Modules

For Medical or General Purpose Applications


66-67-BFF/66-67-BFS Series

Temperature Characteristics

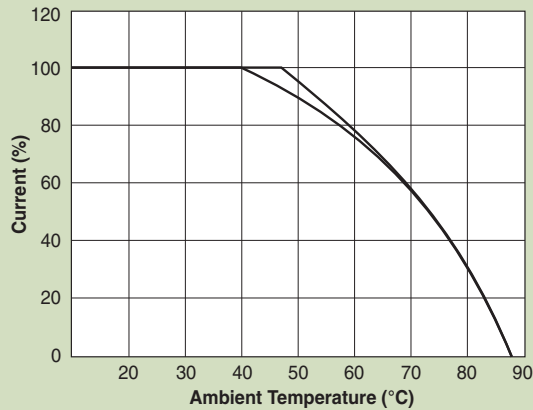


Dimensions


66-67-BFF/66-67-BFS Series

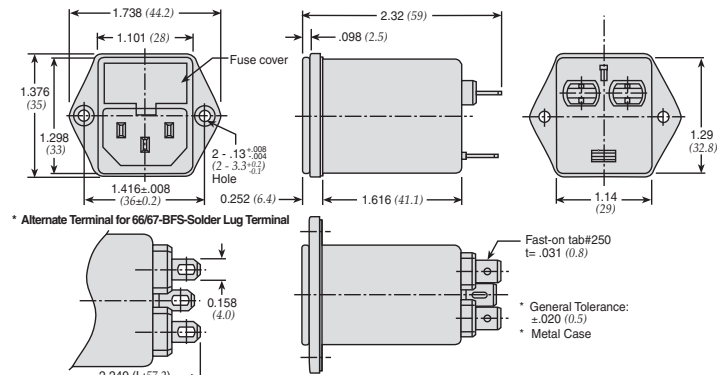


Common Mode

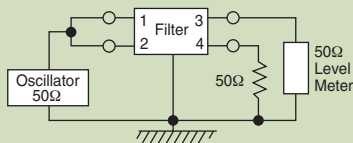


0.01 mA Leakage Current

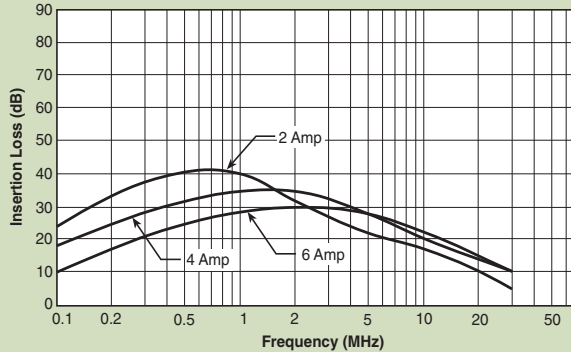


0.075 and 0.1 mA Leakage Current

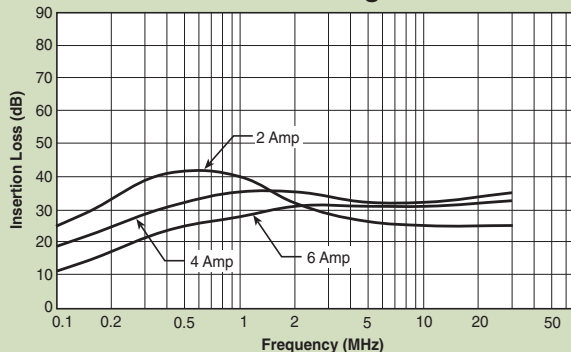


Normal Mode

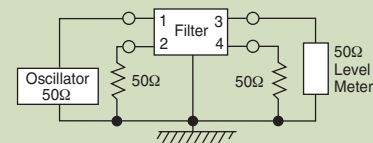

0.01 mA Leakage Current

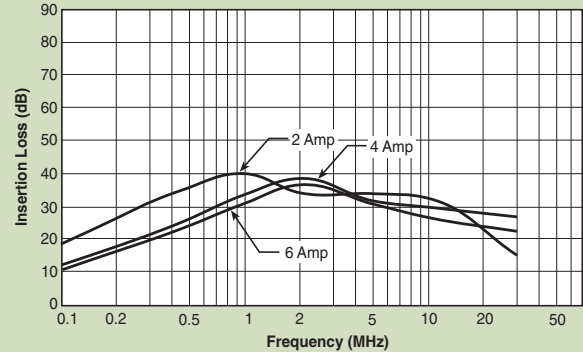

0.075 and 0.1 mA Leakage Current

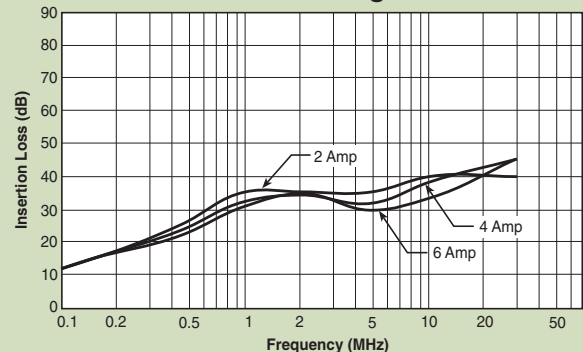

Switched and Fused Filtered Power Entry Modules

For General Purpose Applications

64-65-BSF/64-65-SSF Series

Features

- North American and Metric fuse holders available
- Fuse holder and double pole power ON/OFF switch provided in a convenient/compact package
- Suitable for products that must conform to FCC and FTZ requirements
- Meets over voltage category II of IEC 664 and complies with IEC 950
- Metal case provides effective EMI shielding
- Easy access fuse drawer with space for spare fuse
- Flange-mounted or snap-in styles available for quick mounting
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF39)




Tested and found to be IAW VDE 0565 Part 3.



Applications

- Computers and peripheral equipment
- Digital equipment
- Electronic equipment
- Measuring and testing instruments
- Telecommunications equipment

Circuit Diagram

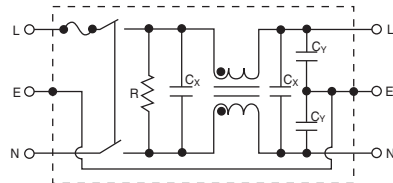

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	C _Y	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)					
					C _{X1}	C _{X2}							
64-XXX-020-3-12	250VAC	2A	0.35mA	2200pF	0.22uF	NONE	10.5mH	45°C					
64-XXX-020-3-04						0.22uF							
64-XXX-020-3-14						NONE							
64-XXX-020-3-06			0.22uF	NONE									
64-XXX-020-5-12			0.50mA	3300pF	0.22uF	NONE							
64-XXX-020-5-04					0.22uF	NONE							
64-XXX-020-5-14	0.47uF	0.22uF											
64-XXX-020-5-06	250VAC	4A	0.35mA	2200pF	0.22uF	NONE	4.2mH	45°C					
64-XXX-040-3-04						0.22uF			NONE				
64-XXX-040-3-14						0.47uF			NONE				
64-XXX-040-3-06			0.50mA	3300pF	0.22uF	NONE							
64-XXX-040-5-12					0.22uF	NONE							
64-XXX-040-5-04					0.47uF	NONE							
64-XXX-040-5-14	250VAC	6A	0.35mA	2200pF	0.22uF	NONE	1.6mH	45°C					
64-XXX-060-3-04						0.22uF			NONE				
64-XXX-060-3-14						0.47uF			NONE				
64-XXX-060-3-06			0.50mA	3300pF	0.22uF	NONE							
64-XXX-060-5-12					0.22uF	NONE							
64-XXX-060-5-04					0.47uF	NONE							
64-XXX-060-5-14	250VAC	6A	0.50mA	3300pF	0.47uF	NONE	1.6mH	45°C					
64-XXX-060-5-06						0.22uF			NONE				
65-XXX-020-3-12						125VAC			2A	0.20mA	2200pF	0.22uF	NONE
65-XXX-020-3-04			0.22uF	NONE									
65-XXX-020-3-14			0.47uF	NONE									
65-XXX-020-3-06			0.25mA	3300pF	0.22uF					NONE			
65-XXX-020-5-12	0.22uF	NONE											
65-XXX-020-5-04	0.47uF	NONE											
65-XXX-020-5-14	125VAC	4A	0.20mA	2200pF	0.22uF	NONE	4.2mH	45°C					
65-XXX-020-5-06						0.22uF			NONE				
65-XXX-040-3-12						0.47uF			NONE				
65-XXX-040-3-04			0.25mA	3300pF	0.22uF	NONE							
65-XXX-040-3-14					0.22uF	NONE							
65-XXX-040-3-06					0.47uF	NONE							
65-XXX-040-5-12	125VAC	6A	0.25mA	3300pF	0.47uF	NONE	1.6mH	45°C					
65-XXX-040-5-04						0.22uF			NONE				
65-XXX-040-5-14						0.22uF			NONE				
65-XXX-040-5-06			0.20mA	2200pF	0.22uF	NONE							
65-XXX-060-3-12						0.22uF			NONE				
65-XXX-060-3-04						0.47uF			NONE				
65-XXX-060-3-14	125VAC	2A	0.20mA	2200pF	0.47uF	NONE	10.5mH	45°C					
65-XXX-060-3-06						0.22uF			NONE				
65-XXX-060-5-12						0.22uF			NONE				
65-XXX-060-5-04			0.25mA	3300pF	0.22uF	NONE							
65-XXX-060-5-14					0.22uF	NONE							
65-XXX-060-5-06					0.47uF	NONE							

Note: Test Voltage 1500VAC one minute, line to ground
Insulation Resistance: 300 MΩ min. at 500VDC
B(S) = Bolt-in terminals or (Snap-in terminals)

Voltage Drop: 1V max. at rated current
Weight: 130g
Inlet: Compatible with IEC-320


* **Substitute BSF or SSF for XXX**
BSF - Bolt-in switched and fused
SSF - Snap-in switched and fused

Switched and Fused Filtered Power Entry Modules


For General Purpose Applications

Dimensions


64/65-BSF Series

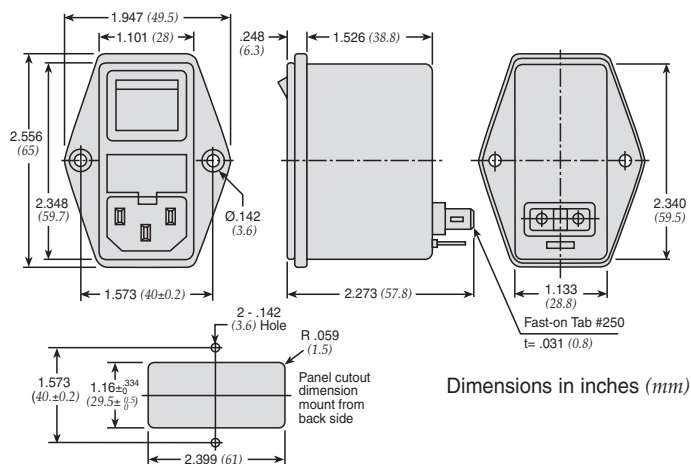


Temperature Characteristics

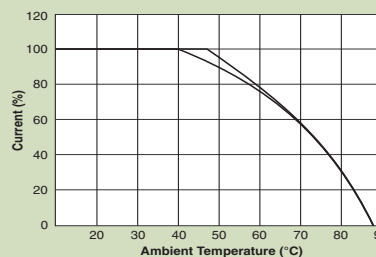


64/65-SSF Series

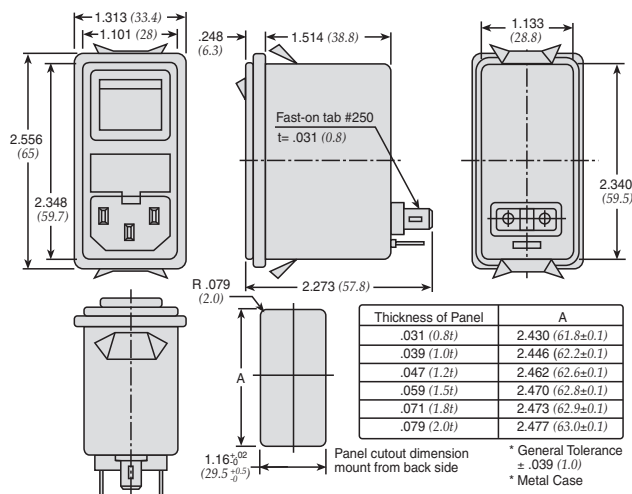


Common Mode

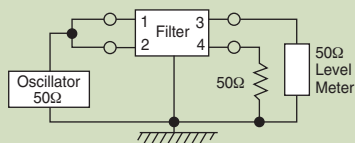


0.35 mA Leakage Versions

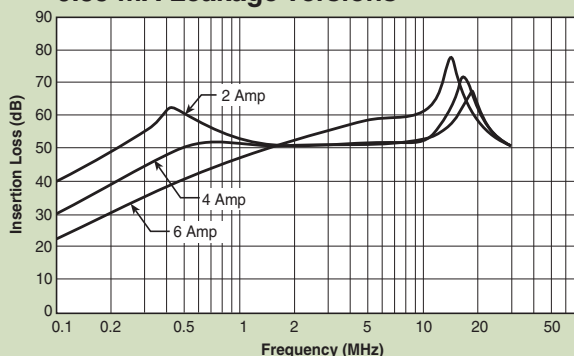


0.50 mA Leakage Versions

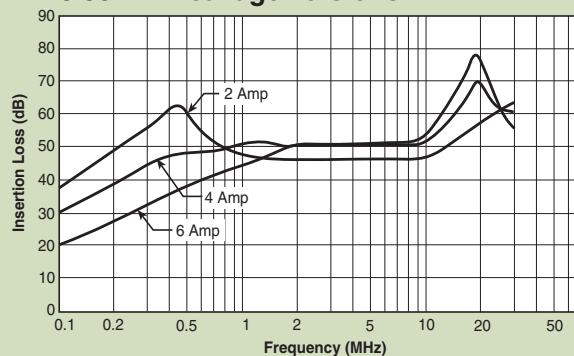


Normal Mode

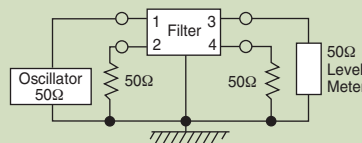

64/65-B(S)SF-*-02(04,06)

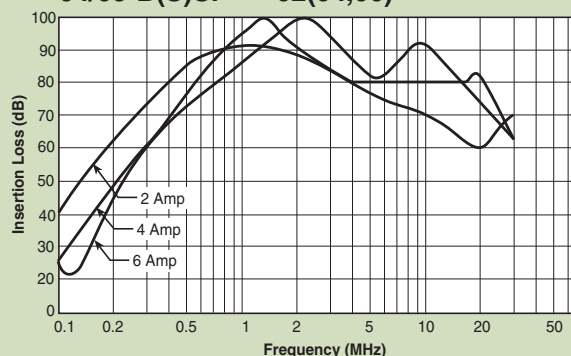

64/65-B(S)SF-*-11(12,14)

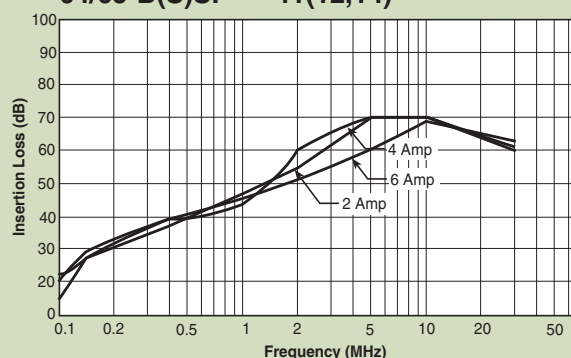

Switched and Fused Filtered Power Entry Modules

For Medical or General Purpose Applications

66-67-BSF/66-67-SSF Series



Tested and found to be
IAW VDE 0565 Part 3

Features

- Metric and North American fuse holders available
- Fuse holder and a double pole power ON/OFF switch provides a convenient/compact package
- Suitable for products that must conform to FCC and FTZ requirements
- Meets over voltage category II of IEC 664 and complies with IEC 950
- Provides susceptibility protection without the leakage current associated with line-to-ground capacitors
- Designed to meet requirements for non-patient and patient care equipment
- Metal case provides effective EMI shielding
- Easy access fuse drawer - space for spare fuse
- Flange-mounted or snap-in styles available for quick mounting
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF41)

Specifications

Model*	Rated Voltage 50/60Hz	Rated Current	Leakage Current (Max.)	Capacitance			Temp. Induct. (L ₁)	Rise (Max.)		
				C _Y	C _{X1}	C _{X2}				
66-XXX-020-0-12	250 VAC	2A	.075mA	330pF	0.22uF	NONE	10.5mH	40°C		
66-XXX-020-0-04					0.22uF	NONE				
66-XXX-020-0-14					0.47uF	0.22uF				
66-XXX-020-0-06					0.22uF	NONE				
66-XXX-020-1-12			.01mA	NONE	0.22uF	NONE			10.5mH	40°C
66-XXX-020-1-04					0.22uF	NONE				
66-XXX-020-1-14					0.47uF	0.22uF				
66-XXX-020-1-06					0.22uF	NONE				
66-XXX-020-4-12			0.1mA	470pF	0.22uF	NONE				
66-XXX-020-4-04					0.22uF	NONE				
66-XXX-020-4-14					0.47uF	0.22uF				
66-XXX-020-4-06					0.22uF	NONE				
66-XXX-040-0-12		4A	.075mA	330pF	0.22uF	NONE	4.2mH	45°C		
66-XXX-040-0-04					0.22uF	NONE				
66-XXX-040-0-14					0.47uF	0.22uF				
66-XXX-040-0-06					0.22uF	NONE				
66-XXX-040-1-12			.01mA	NONE	0.22uF	0.22uF			4.2mH	
66-XXX-040-1-04					0.22uF	NONE				
66-XXX-040-1-14					0.47uF	0.22uF				
66-XXX-040-1-06					0.22uF	NONE				
66-XXX-040-4-12			.01mA	470pF	0.22uF	NONE				
66-XXX-040-4-04					0.22uF	NONE				
66-XXX-040-4-14					0.47uF	0.22uF				
66-XXX-040-4-06					0.22uF	NONE				
66-XXX-060-0-12		6A	.075mA	330pF	0.22uF	NONE	1.6mH			
66-XXX-060-0-04					0.22uF	NONE				
66-XXX-060-0-14					0.47uF	0.22uF				
66-XXX-060-0-06					0.22uF	NONE				
66-XXX-060-1-12			.01mA	NONE	0.22uF	0.22uF			1.6mH	
66-XXX-060-1-04					0.22uF	NONE				
66-XXX-060-1-14					0.47uF	0.22uF				
66-XXX-060-1-06					0.22uF	NONE				
66-XXX-060-4-12			0.1mA	470pF	0.22uF	NONE				
66-XXX-060-4-04					0.22uF	NONE				
66-XXX-060-4-14					0.47uF	0.22uF				
66-XXX-060-4-06					0.22uF	NONE				

Note: Test Voltage: 1500VAC one minute, line to ground
Insulation Resistance: 300 MΩ min. at 500VDC
Voltage Drop: 1V max. at rated current

Weight: 130g
Inlet: Compatible with IEC-320
B(S) = Bolt-in terminals or (Snap-in terminals)

* Substitute BSF or SSF for XXX
BSF - Bolt-In Switched and Fused
SSF - Snap-In Switched and Fused




Applications

- Medical equipment
- Industrial equipment
- Telecommunications equipment
- Measuring and testing instruments
- Digital equipment (including switching power supplies)
- General purpose filter for susceptibility or high frequency "clean up" applications

Circuit Diagram

Note: C_{Y1} and C_{Y2} capacitors
omitted on 66/67
B(S)F-XXX-1-X Filters

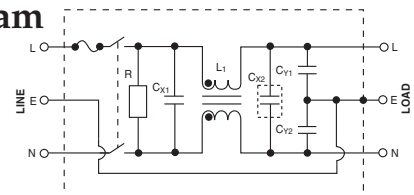

Model*	Rated Voltage 50/60Hz	Rated Current	Leakage Current (Max.)	Capacitance			Temp. Induct. (L ₁)	Rise (Max.)	
				C _Y	C _{X1}	C _{X2}			
67-XXX-020-0-12	125 VAC	2A	0.04mA	330pF	0.22uF	NONE	10.5mH	40°C	
67-XXX-020-0-04					0.22uF				
67-XXX-020-0-14					NONE				
67-XXX-020-0-06					0.47uF				
67-XXX-020-1-12					0.22uF				
67-XXX-020-1-04					0.22uF				
67-XXX-020-1-14			NONE						
67-XXX-020-1-06			0.47uF						
67-XXX-020-1-06			0.22uF						
67-XXX-020-4-12			0.05mA	470pF	0.22uF	NONE			
67-XXX-020-4-04					0.22uF				
67-XXX-020-4-14					NONE				
67-XXX-020-4-06		0.47uF							
67-XXX-020-4-06		0.22uF							
67-XXX-040-0-12		4A			0.04mA	330pF	0.22uF	NONE	4.2mH
67-XXX-040-0-04			0.22uF						
67-XXX-040-0-14			NONE						
67-XXX-040-0-06			0.47uF						
67-XXX-040-0-06			0.22uF						
67-XXX-040-1-12			.005mA	NONE			0.22uF	NONE	
67-XXX-040-1-04					0.22uF				
67-XXX-040-1-14					NONE				
67-XXX-040-1-06					0.47uF				
67-XXX-040-1-06					0.22uF				
67-XXX-040-4-12					0.05mA	470pF	0.22uF	NONE	
67-XXX-040-4-04			0.22uF						
67-XXX-040-4-14		NONE							
67-XXX-040-4-06		0.47uF							
67-XXX-040-4-06		0.22uF							
67-XXX-060-0-12		6A	0.04mA	330pF			0.22uF	NONE	1.6mH
67-XXX-060-0-04					0.22uF				
67-XXX-060-0-14					NONE				
67-XXX-060-0-06					0.47uF				
67-XXX-060-1-12					0.22uF				
67-XXX-060-1-04					.005mA	NONE	0.22uF	NONE	
67-XXX-060-1-14			0.22uF						
67-XXX-060-1-06			0.47uF						
67-XXX-060-1-06			0.22uF						
67-XXX-060-4-12			0.05mA	470pF			0.22uF	NONE	
67-XXX-060-4-04							0.22uF		
67-XXX-060-4-14					NONE				
67-XXX-060-4-06		0.47uF							
67-XXX-060-4-06		0.22uF							
67-XXX-060-4-06		0.22uF							



Technical drawing of the Fast-on Tab #250 showing three views: front, side, and back. Dimensions are given in inches (mm).

Front View Dimensions:

- Overall width: 1.947 (49.5)
- Overall height: 2.556 (65)
- Top mounting hole diameter: $\varnothing .142$ (3.6)
- Top mounting hole position from top edge: .248 (6.3)
- Top mounting hole position from side edge: 1.101 (28)
- Bottom mounting hole diameter: $\varnothing .142$ (3.6)
- Bottom mounting hole position from bottom edge: 2.348 (59.7)
- Bottom mounting hole position from side edge: 1.573 (40±0.2)
- Central rectangular cutout width: 1.573 (40±0.2)
- Central rectangular cutout height: 1.16^{+0.02}₋₀ (29.5^{+0.5}₋₀)

Side View Dimensions:

- Overall width: 1.526 (38.8)
- Overall height: 2.273 (57.8)

Back View Dimensions:

- Overall width: 1.133 (28.8)
- Overall height: 2.340 (59.5)
- Fast-on Tab #250
- Tab thickness: $t = .031$ (0.8)

Panel Cutout Dimensions:

- Overall width: 1.573 (40±0.2)
- Overall height: 2.399 (61)
- Top mounting hole diameter: 2 - .142 (3.6) Hole
- Top mounting hole position from top edge: R .059 (1.5)
- Top mounting hole position from side edge: 1.16^{+0.02}₋₀ (29.5^{+0.5}₋₀)
- Bottom mounting hole position from bottom edge: 2.399 (61)
- Panel cutout dimension mount from back side

Dimensions in inches (mm)

Dimensions in inches (mm)

Ambient Temperature (°C)	Current (%)
20	100
30	100
40	100
50	100
60	90
70	75
80	45
90	0

Technical drawings of the R.079 (2.0) panel cutout dimensions. The drawings show the front, side, and rear views of the panel. The front view shows a rectangular panel with a central cutout and mounting tabs. The side view shows the panel's thickness and the location of the mounting tabs. The rear view shows the panel's back with mounting tabs and a central cutout. Dimensions are given in inches and millimeters. A table provides the thickness of the panel and the corresponding panel cutout dimensions. A note indicates that the dimensions are general tolerances and that the metal case is included.

Thickness of Panel	A
.031 (0.8)	2.430 (61.8±0.1)
.039 (1.0)	2.446 (62.2±0.1)
.047 (1.2)	2.462 (62.6±0.1)
.059 (1.5)	2.470 (62.8±0.1)
.071 (1.8)	2.473 (62.9±0.1)
.079 (2.0)	2.477 (63.0±0.1)

* General Tolerance ± .039 (1.0)
* Metal Case

The graph shows the insertion loss of a 100 pF capacitor as a function of frequency for three different current levels: 2 Amp, 4 Amp, and 6 Amp. The x-axis represents Frequency in MHz on a logarithmic scale from 0.1 to 50. The y-axis represents Insertion Loss in dB on a linear scale from 0 to 90. The 2 Amp curve has the highest peak loss of approximately 45 dB at 0.5 MHz. The 4 Amp and 6 Amp curves have lower peak losses of approximately 40 dB and 35 dB, respectively, both occurring at 0.5 MHz. All curves show a decrease in loss as frequency increases beyond the peak.

Frequency (MHz)	2 Amp (dB)	4 Amp (dB)	6 Amp (dB)
0.1	32	22	20
0.2	40	28	25
0.5	45	40	35
1	40	38	32
2	35	32	28
5	25	22	20
10	18	15	12
20	12	10	8
50	8	6	4

Graph of Insertion Loss (dB) vs Frequency (MHz) for a 100 ohm resistor. The graph shows three curves for 2 Amp, 4 Amp, and 6 Amp currents. The 2 Amp curve has the highest loss, peaking at ~45 dB around 0.5 MHz. The 4 Amp and 6 Amp curves are lower, with the 6 Amp curve having the lowest loss, peaking at ~38 dB around 0.5 MHz. All curves show a slight decrease in loss at higher frequencies.

The graph shows the insertion loss of a 100 ohm resistor as a function of frequency and current. The y-axis represents Insertion Loss in dB, ranging from 0 to 90. The x-axis represents Frequency in MHz on a logarithmic scale, ranging from 0.1 to 50. Three curves are plotted for different current levels: 2 Amp, 4 Amp, and 6 Amp. All curves show a peak in insertion loss around 5 MHz. The 2 Amp curve has the highest peak, followed by the 4 Amp and then the 6 Amp curve.

Frequency (MHz)	2 Amp (dB)	4 Amp (dB)	6 Amp (dB)
0.1	12	11	10
0.2	18	17	16
0.5	25	24	23
1	32	31	30
2	42	40	38
5	48	45	42
10	45	42	40
20	35	32	30
50	25	22	20

The graph shows the insertion loss of a 100 pF capacitor as a function of frequency and current. The y-axis represents Insertion Loss in dB, ranging from 0 to 90. The x-axis represents Frequency in MHz, ranging from 0.1 to 50 on a logarithmic scale. Three curves are plotted for different current levels: 2 Amp, 4 Amp, and 6 Amp. All curves start at approximately 12 dB at 0.1 MHz. The 2 Amp curve rises to about 50 dB at 5 MHz and then levels off. The 4 Amp curve rises to about 45 dB at 5 MHz and then levels off. The 6 Amp curve rises to about 40 dB at 5 MHz and then levels off.

Frequency (MHz)	2 Amp (dB)	4 Amp (dB)	6 Amp (dB)
0.1	12	12	12
0.2	15	15	15
0.5	22	22	22
1	30	28	25
2	40	35	32
5	50	45	40
10	50	45	40
20	50	45	40
50	50	45	40

Switched and Fused Filtered Power Entry Modules

Dual Fuse for European Applications

68-BSF Series

Features

- Dual fuse for European applications
- Fuse holder and double pole power ON/OFF switch provides a convenient/compact package
- Suitable for products that must conform to FCC and FTZ requirements
- Meets over voltage category II of IEC 664 and complies with IEC 950
- Metal case provides effective EMI shielding
- IEC connector meets the safety standards of most certifying agencies
- Easy access fuse drawer
- Flange-mounted
- UL, CSA, and SEMKO approved
- Designed to be in accordance with VDE 0565, part 3
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF43)

Applications

- Computers and peripheral equipment
- Electronic equipment
- Digital equipment
- Measuring and testing instruments
- Telecommunications equipment


Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance				Inductance (L ₁)	Temperature Rise (Max.)
				C _{Y1}	C _{Y2}	C _{X1}	C _{X2}		
68-BSF-020-3-01	250VAC	2A	0.35mA	2200pF	2200pF	0.1uF	0.1uF	10.5mH	45°C
68-BSF-020-3-04						0.22uF	0.22uF		
68-BSF-040-3-01		4A				0.1uF	0.1uF	4.2mH	
68-BSF-040-3-04						0.22uF	0.22uF		
68-BSF-060-3-01		6A				0.1uF	0.1uF	1.6mH	
68-BSF-060-3-04						0.22uF	0.22uF		

Note: Test Voltage 1500VAC one minute, line to ground
Insulation Resistance: 300 MΩ min. at 500VDC
Voltage Drop: 1V max. at rated current
Weight: 130g
Inlet: Compatible with IEC-320
B(S) = Bolt-in terminals





Circuit Diagram

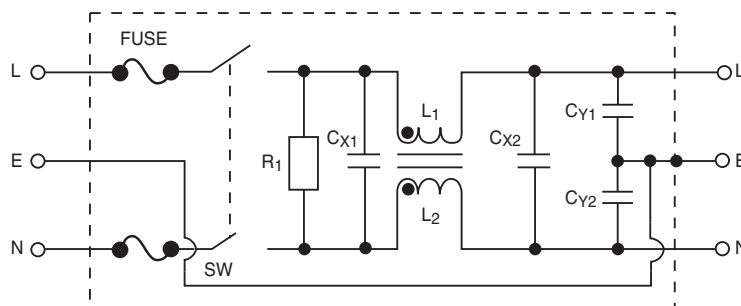



Switched and Fused Filtered Power Entry Modules

Dual Fuse for European Applications



68-BSF Series

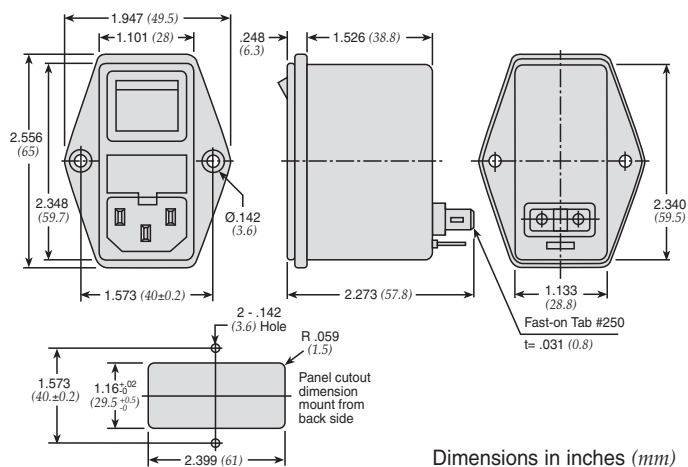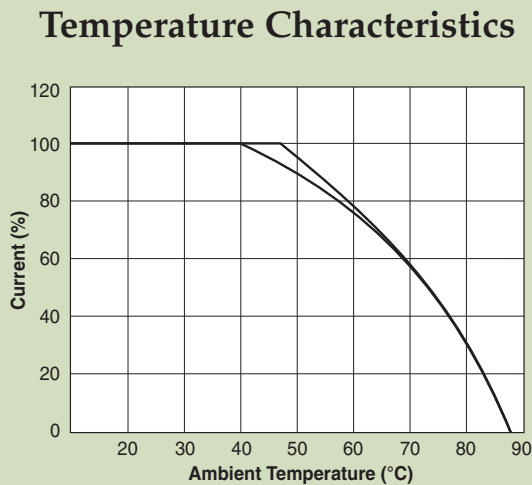

Common Mode

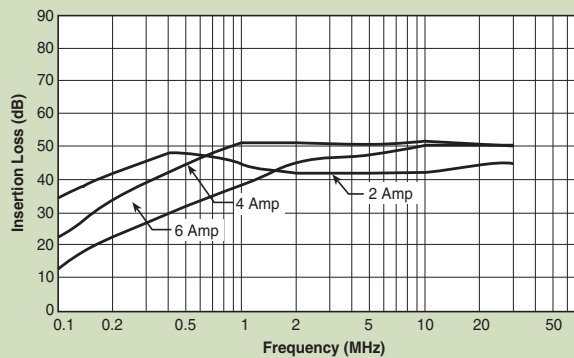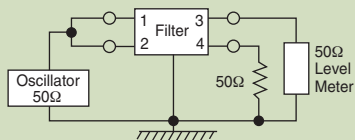

Normal Mode

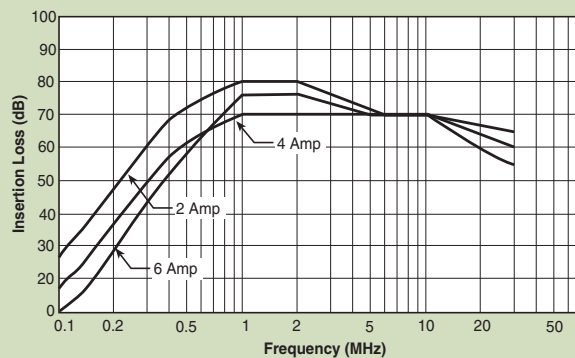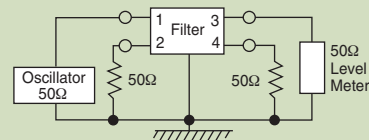

Power Entry Modules Bolt-in Right Angle Terminals for PCB Applications

60-BPP Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards Solder lug, Fast-on tab styles available (see page PF18)
- PCB mounting style minimizes space and provides economical installation
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF47)
- UL approved low leakage version also available

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3



Circuit Diagram

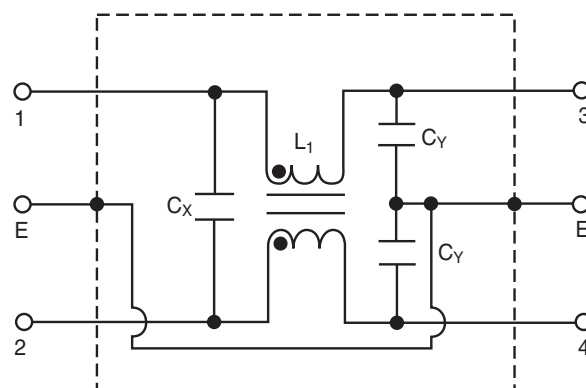

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-BPP-010-3-2	250VAC	1A	0.35mA	2200pF	0.022uF	6.0mH	30°C
60-BPP-010-3-4					0.047uF		
60-BPP-010-5-2			0.50mA	3300pF	0.022uF		
60-BPP-010-5-4					0.047uF		
60-BPP-020-3-2		2A	0.35mA	2200pF	0.022uF	2.4mH	
60-BPP-020-3-4					0.047uF		
60-BPP-020-5-2			0.50mA	3300pF	0.022uF		
60-BPP-020-5-4					0.047uF		
60-BPP-030-3-2		3A	0.35mA	2200pF	0.022uF	1.2mH	
60-BPP-030-3-4					0.047uF		
60-BPP-030-5-2			0.50mA	3300pF	0.022uF		
60-BPP-030-5-4					0.047uF		
60-BPP-060-3-2		6A	0.35mA	2200pF	0.022uF	0.53mH	45°C
60-BPP-060-3-4					0.047uF		
60-BPP-060-5-2			0.50mA	3300pF	0.022uF		
60-BPP-060-5-4					0.047uF		


Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320

Power Entry Modules Bolt-in Right Angle Terminals


for PCB Applications

60-BPP Series


Temperature Characteristics

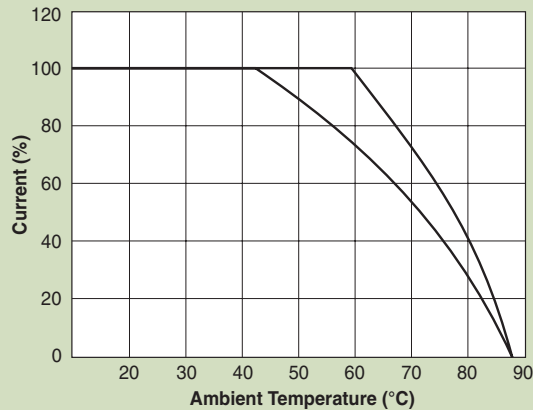


60-BPP PCB Mounting Type

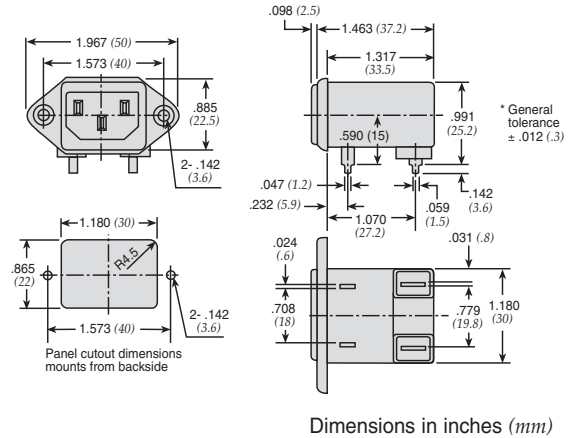


Common Mode

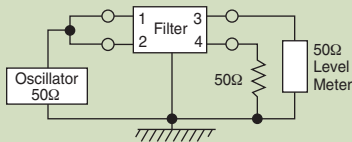


60-BPP-010;-020

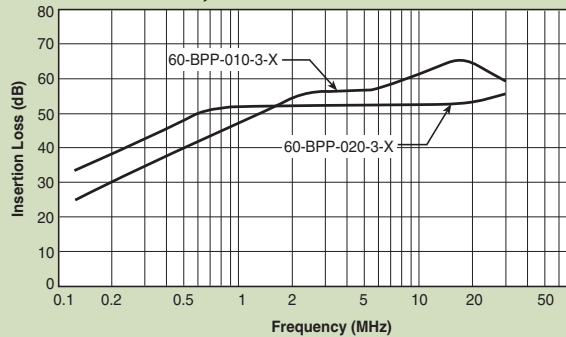


60-BPP-030;-060

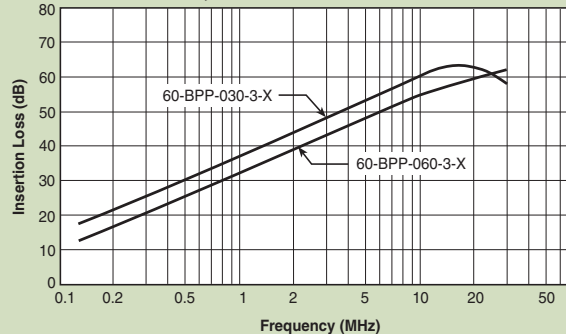


Normal Mode

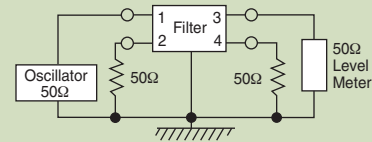

60-BPP-010;-020

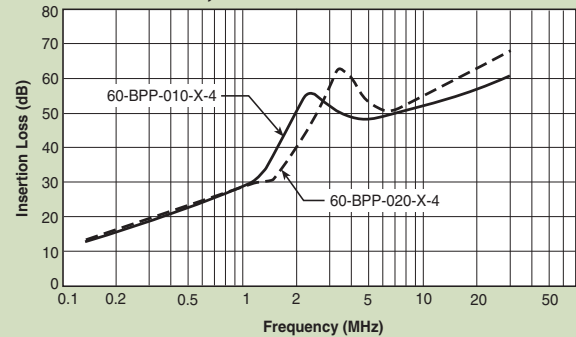

60-BPP-030;-060

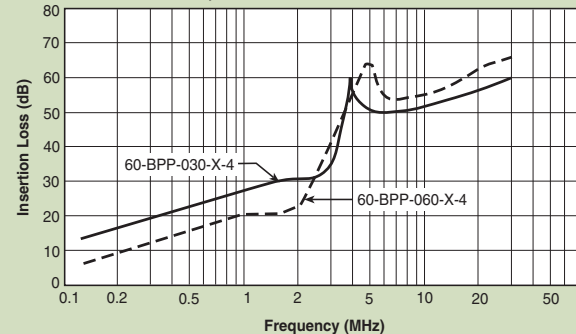

Power Entry Modules High Frequency Attenuation

Bolt-in for PCB Applications

60-BHP Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal cased filter offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Solder lug, Fast-on tab styles available (see page PF20)
- PCB mounting minimizes space and provides economical installation
- Excellent filtering characteristics for high frequencies
- Earth coil standard
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF49)

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3



Circuit Diagram

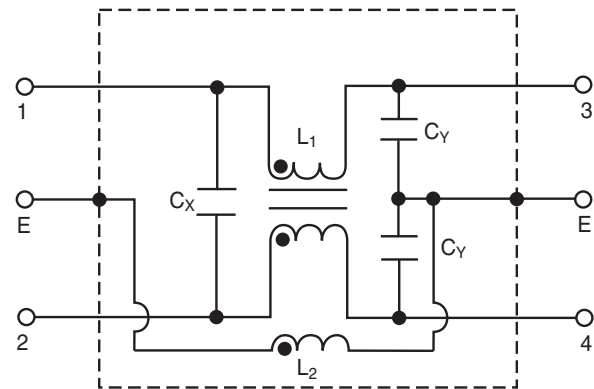

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance		Temperature Rise (Max.)
				C _Y	C _X	(L ₁)	(L ₂)	
60-BHP-010-3-11	250VAC	1A	0.35mA	2200pF±20%	0.1uF±20%	6mH	18.3 uH	30°C
60-BHP-010-3-4					.047uF±20%			
60-BHP-010-5-11			0.50mA	3300pF±20%	0.1uF±20%			
60-BHP-010-5-4					.047uF±20%			
60-BHP-020-3-11		2A	0.35mA	2200pF±20%	0.1uF±20%	2.4mH		
60-BHP-020-3-4					.047uF±20%			
60-BHP-020-5-11			0.50mA	3300pF±20%	0.1uF±20%			
60-BHP-020-5-4					.047uF±20%			
60-BHP-030-3-11		3A	0.35mA	2200pF±20%	0.1uF±20%	1.2mH		
60-BHP-030-3-4					.047uF±20%			
60-BHP-030-5-11			0.50mA	3300pF±20%	0.1uF±20%			
60-BHP-030-5-4					.047uF±20%			
60-BHP-060-3-11		6A	0.35mA	2200pF±20%	0.1uF±20%	0.53mH		45°C
60-BHP-060-3-4					.047uF±20%			
60-BHP-060-5-11			0.50mA	3300pF±20%	0.1uF±20%			
60-BHP-060-5-4					.047uF±20%			


Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320

Power Entry Modules High Frequency Attenuation


Bolt-in for PCB Applications

60-BHP Series


Temperature Characteristics

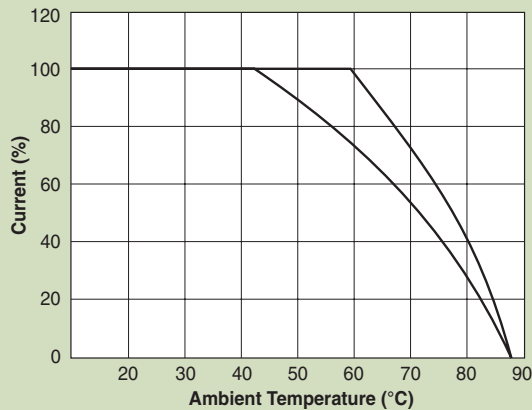


60-BHP PCB Mounting Type

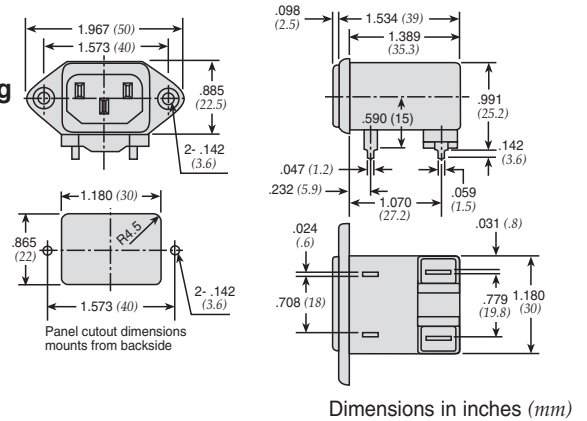


Common Mode

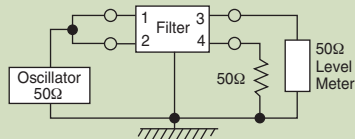


60-BHP-XXX-X-11

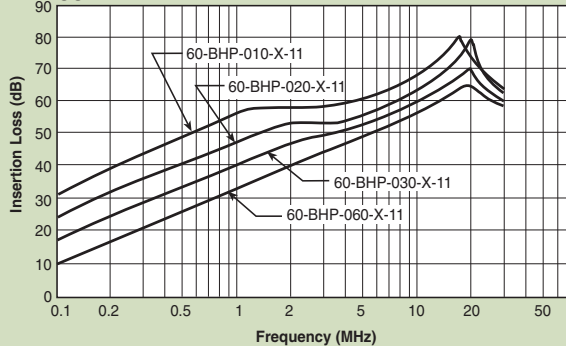


60-BHP-XXX-X-4

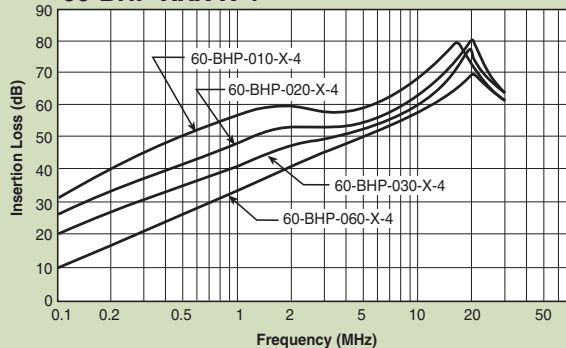

Normal Mode

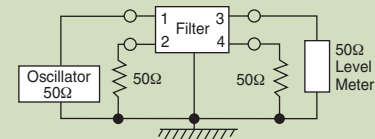

60-BHP-XXX-3-11

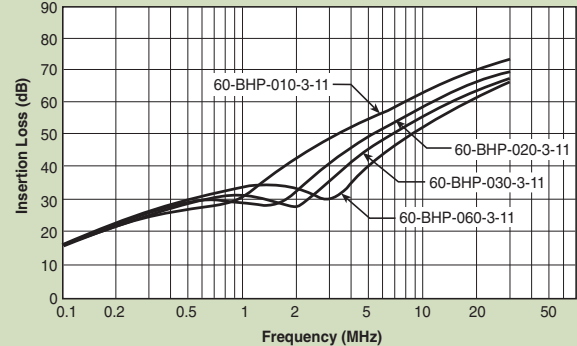

60-BHP-XXX-3-4

