


Subminiature PCB Telecom Relay

PC312B

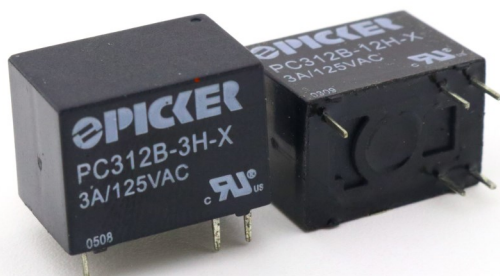

FEATURES

- Subminiature Design
- PC Terminals on 0.1" Grid Pattern
- 0.300" 12 Pin DIL Socket Footprint
- Contact Capacity from 50 mA to 5 A
- Meets FCC Part 68 Voltage Surge
- Class "B" Insulation Standard
- Three Coil Sensitivities Available
- Sealed, Immersion Cleanable
- RoHS Compliant

UL / CUL Ratings

 US E86876

Contact Form	1 Form C		
Rated Load	Voltage	Amps* (3 Amp)	Amps* (5 Amp)
Resistive	14 VDC	0.05 - 3 A	0.05 - 5 A
Resistive	125 VAC	0.05 - 3 A	0.05 - 5 A
Resistive	30 VDC	0.05 - 3 A	0.05 - 5 A

*Minimum Switching Condition for Gold Plated Contacts is 50 mA at 6 VDC

CONTACT DATA

Max. Switching Power	90 W 375 VA	150 W 625 VA
Max. Switching Voltage	60 VDC 220 VAC	
Max. Switching Current	3 A	5 A
Material	AgNi+Au (Clad)	
Initial Contact Resistance	50 mΩ max	
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTIC

Operate Time	5.0 ms. Max.
Release Time	5.0 ms. Max.
Insulation Resistance	100 MΩ min, at 500 VDC
Dielectric Strength	Meets FCC Part 68.302 1,500 V Lightning Surge
	Meets FCC Part 68.304 1,000 V Dielectric
	500 V 50 Hz, Between Contacts
Coil Power	200 mW, 360 mW, 450 mW

CHARACTERISTIC Continued

Shock Resistance	100 m/s ² 11 ms
Vibration Resistance	10 Hz - 70 Hz Double Amplitude 1.5 mm
Terminal Strength	5N
Solderability	260°C for 5 seconds
Temperature Range	- 25°C ~ 70°C
Weight	3.5 grams

ORDERING INFORMATION

Example:	PC312B	-12	H	-X
Model:	PC312B			
Contact Form:	Nil: 1C			
Coil Voltage:	3, 5, 6, 9, 12, 18, 24			
Contact Material:	Nil: AgNi + Au			
Sensitivity:	Nil: Standard 360 mW; B: 450 mW; H: 200 mW			
Current Rating:	Nil: Standard, 3 A; 5: 5 A			
RoHS Compliant:	-X			

Box Quantity: 2,000 ; Inner Box 1,000

COIL DATA


Coil Voltage (VDC)		Coil Power			Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)
		Resistance ohms ± 10%				
Rated	Max	200 mW	360 mW	450 mW		
3	3.3	45	25	20	2.25	0.3
5	5.5	125	75	56	3.75	0.5
6	6.6	180	100	80	4.50	0.6
9	9.9	405	225	180	6.75	0.9
12	13.2	720	400	320	9.00	1.2
18	19.8	1,620	900	720	13.5	1.8
24	26.5	2,880	1,600	1,280	18.0	2.4

Notes:

The use of any coil voltage less than the rated voltage will compromise the operation of the relay. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria.

DIMENSIONS Inches/mm


Relay

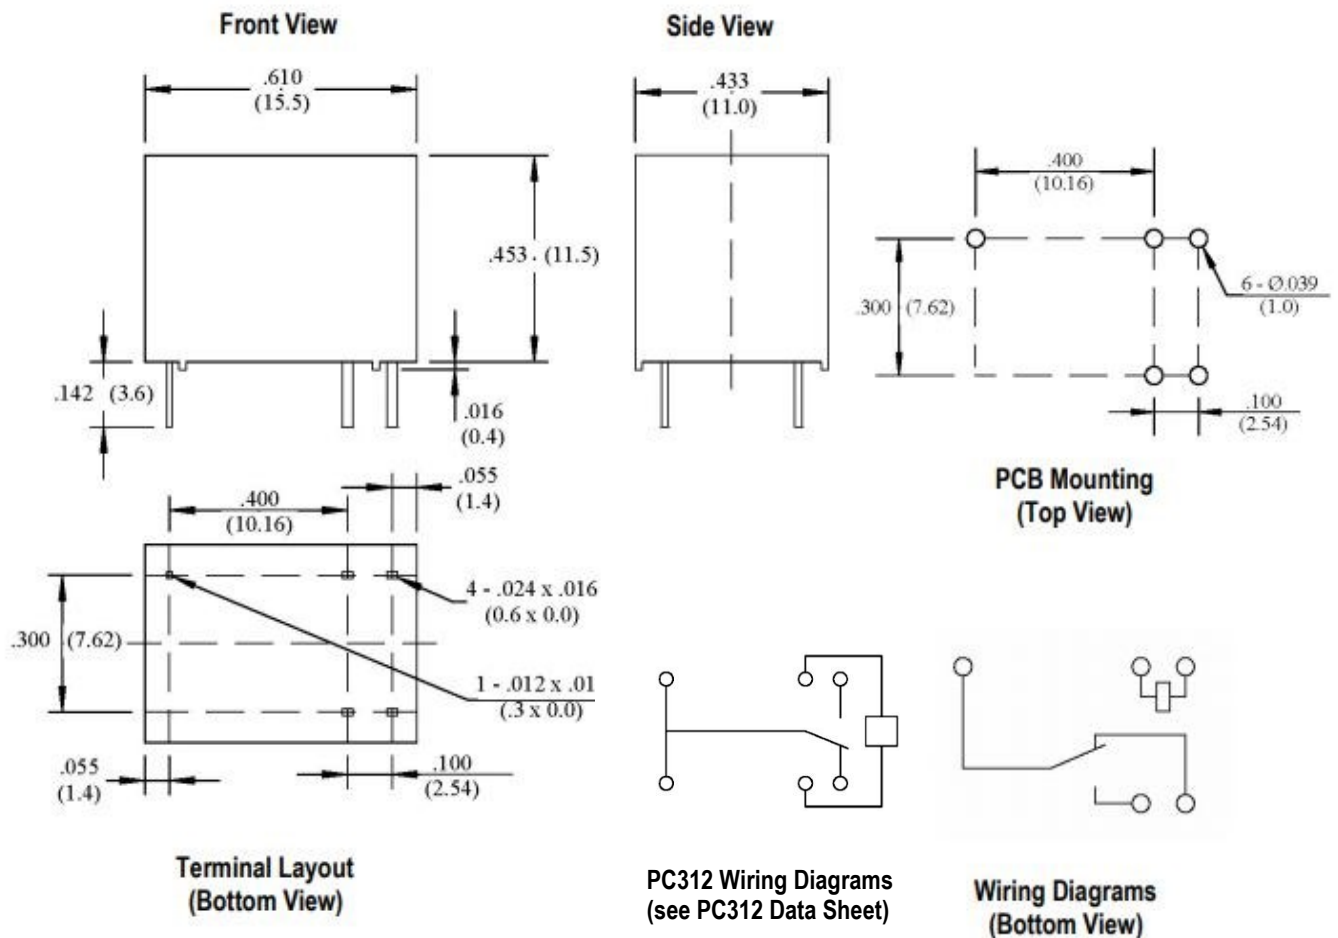


PICKER[®]

COMPONENTS

Signal Relays

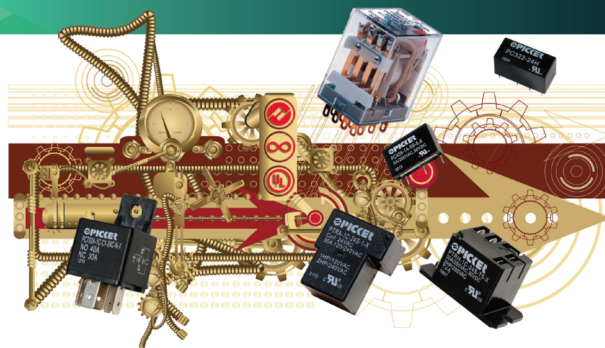



Signal Relays In Applications
From Dry Contacts to 5 Amps



Subminiature Signal Relays

Current Rating At 30 VDC	Series	Coil Power Options in milliWatts						
		150	200	360	400	450	510	560
1 Amp	PC324				X			X
1 Amp	PC323	X	X			X		
2 Amps	PC322	X	X	X			X	
2 Amps	PC324S				X			X
3 Amps	PC332	X	X					



- 0.300" 16 Pin DIL Socket Footprint
- 2 Form C - DPDT (B-M)
- Gold Clad Bifurcated Contacts
- Meets FCC Part 68 Voltage Surge



Current Rating At 30 VDC	Series	Coil Power Options in milliWatts		
		200	360	450
3/5 Amps	PC312	X	X	X
3/5 Amps	PC312B	X	X	X


- 0.300" 12 Pin DIL Socket Footprint
- 2 Form 1A - SPST OR 1C SPDT
- Meets FCC Part 68 Voltage Surge

PC312 differs from the PC312B with a different pin configuration



Gold Clad Bifurcated Contacts

- Where noted, these relays utilize *Gold Clad Bifurcated Contacts*.
- These are forked contacts making a connection at two parallel contact points. This adds to the reliability of the relay by reducing the contact resistance.
- Gold is used because it does not oxidize like copper or silver which is most important in dry contact applications.

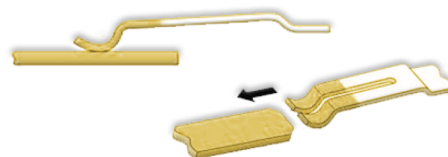

888-997-3933 • PickerComponents.com
Sales@PickerComponents.com

PICKER[®]

PICKER[®] 3220 Commander Drive, Suite 102 Carrollton, TX 75006
Sales: (972) 713-6272 (888) 997-3933 Fax: (972) 735-0964

www.PickerComponents.com

e-mail: sales@pickercomponents.com

Dimensions are listed for reference purposes only.




Specifications and Availability subject to change without notice.

PC312B Rev J 10/29/2018

PICKER[®]

COMPONENTS






Signal Relays

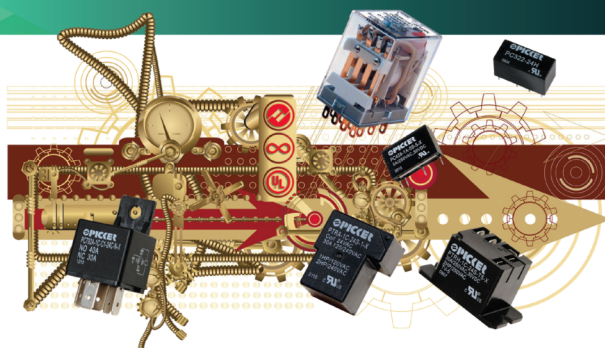

Ultraminiature Signal Relays

Current Rating At 30 VDC	Series	Coil Power Options in milliwatts			Contact Configuration	Optional Latching
		140	150	200		
1 Amps	PC307		X	X	Form 1C SPST	X
2 Amps	PC303	X			Form 2C DPDT (8-M)	Single Coil

- 0.200" 10 Pin DIL Socket Footprint
- Gold Plated Bifurcated Contacts
- Meet FCC Part 68 Voltage Surge





Microminiature Signal Relays

Current Rating At 30 VDC	Series	Coil Power Options in milliwatts			Optional Latching
		140	150	200	
2 Amps	PC302	X			Single & Dual Coil
2 Amps	PC302S*	X			Single Coil Side Stable

* PC 302S is the Surface Mount Version

- 0.300" 10 Pin DIL Socket Footprint
- Low 5mm Profile
- Gold Plated Bifurcated Contacts
- Meet FCC Part 68 Voltage Surge
- Latching - Single and Dual Coil Latching Options



888-997-3933 • PickerComponents.com
Sales@PickerComponents.com



PICKER 3220 Commander Drive, Suite 102 Carrollton, TX 75006
Sales: (972) 713-6272 (888) 997-3933 Fax: (972) 735-0964

Dimensions are listed for reference purposes only.

PC312B Rev J 10/29/2018

www.PickerComponents.com

e-mail: sales@pickercomponents.com

Specifications and Availability subject to change without notice.