


## SPECIFICATION CONTROL DRAWING

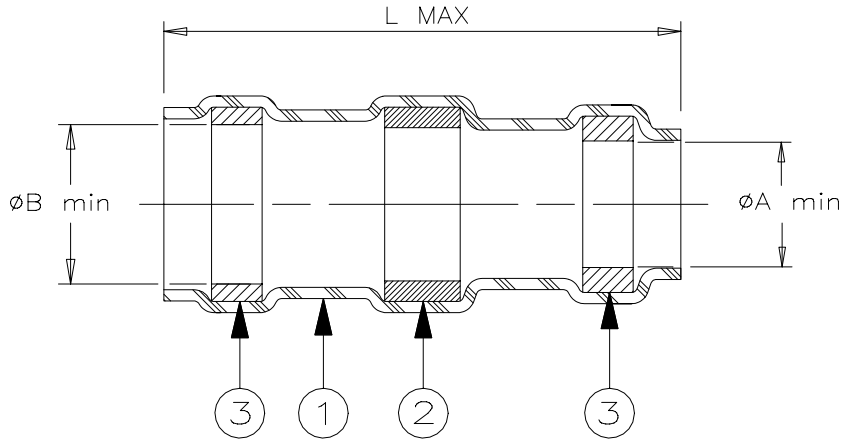

Product Revision		Product Dimensions			Cable Dimensions			
Product Name		L max	ØA min	ØB min	ØD max	ØE min	ØG max	J±1.3 (J±0.05)
D-107-00	K	20.4 (0.805)	5.95 (0.235)	6.45 (0.255)	6.45 (0.255)	3.20 (0.125)	5.95 (0.235)	7 (0.275)


### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Sn63 per ANSI-J-STD-006.  
FLUX: TYPE ROL1 per ANSI-J-STD-004.  
THERMAL INDICATOR: Violet.
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: gray.

### APPLICATION

- This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated copper shields.
- Install using Raychem-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
- Assemblies will meet requirements of Raychem specification RT-1404 and National Aerospace Standard NAS-1747.
- Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:

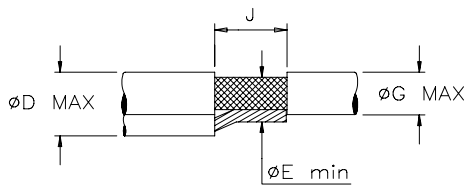

\* A trademark of Raychem Corporation.

<b>Raychem</b>		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: <b>SOLDERSLEEVE* SHIELD TERMINATOR</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: <b>D-107-00</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A  ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER:  D981829		REPLACES:  D961391	
DRAWN BY: M. FORONDA		DATE: 28-Oct-98		PROD. REV. SEE TABLE		DOC ISSUE: 3	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-107-00](#)