

PRODUCT NO.	BUTTON LOCATION	BUTTON	PACKAGING SPEC	PRODUCT SPEC
=10013879-30RRS=	RIGHT-RIGHT	BUTTON S	GS-14-557 (WITH SHUTTER)	110-374
10013879-30RRSLF				

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
1	SKETCHED		M.H	8/27/02
A	RELEASED	J20510	M.H	9/10/02
B	REVISED	J04-0433	M.H	12/1/04

11. SHOW DIMENSIONS WITHIN 10mm OF END OF INSERTED CARD.

11. カードかん合端面より10mm範囲の寸法を示す。

10. SHOW PIN ROOT DIMENSIONS.

9. 基板実装時の寸法を示す。

9. SHOW P.C. BOARD MOUNTING DIMENSIONS.

8. ネジ止めの推奨締付トルク: 0.196N·m (2.0kgf·cm) MAX

7. FOUR SIZE M2xP0.4 SCREWS WITH WASHER(CUSTOMER SUPPLIED) ARE REQUIRED FOR FASTENING CONNECTOR TO P.C. BOARD.

7. 基板への取り付けはM2xP0.4ネジ及び座金を各4個使用する。

6. DETERMINE MOUNTING SCREW LENGTH UPON CHECKING P.C. BOARD THICKNESS AND " \* " DIMENSION, (" \* " SHOWS REQUIRED SCREW LENGTH FROM MOUNTING SURFACE.)

5. タンシ長さは表1に示す。

5. SEE TABLE1 FOR PIN CONTACT LENGTH.

4. 推奨パターン寸法図は, "RE-AH" ボードコネクタ製品図に示す。

4. SEE "RE-AH" BOARD CONNECTOR PRODUCT DRAWING FOR RECOMMENDED PATTERN DIMENSIONS.

3. 本品は, "RE-AH" ボードコネクタと組み合わせて使用する。

3. THIS PRODUCT USED WITH "RE-AH" BOARD CONNECTOR.

2. 本体の色調は黒。ボタン及びシャッターの色調は黒。

2. BODY COLOR IS BLACK, BUTTON AND SHUTTER COLOR IS BLACK.

注記 1. 本品は, 基板上取付タイプ, 操作ボタン右側出し。

NOTE 1. THIS PRODUCT IS ABOVE MOUNT TYPE, RIGHT SIDE BUTTON TYPE.

(12)	SHUTTER FRAME T	1	STAINLESS STEEL								
(11)	SHUTTER FRAME B	1	STAINLESS STEEL								
(10)	SHUTTER DOOR	2	ABS								UL 94HB
(9)	HOLDER	1	GLASS FILLED LCP								UL 94V-0
(8)	PCB	1	GLASS EPOXY MULTI-LAYER	CONTACT AREA 0.05μmMin.GOLD OVER NICKEL							UL 94V-0
(7)	EARTH	2	STAINLESS STEEL								
(6)	SPACER	2	ZINC ALLOY								
(5)	SHROUD	2	COPPER ALLOY	CONTACT AREA 0.05μmMin.GOLD OVER 1.0μm Min.NICKELL							
(4)	BUTTON	2	ABS								UL 94HB
(3)	HDR HOUSING	2	GLASS FILLED LCP								UL 94V-0
(2)	CASE	2	GLASS FILLED PBT								UL 94V-0
(1)	PIN	2x 68	COPPER ALLOY	CONTACT AREA 0.2μmMin.GOLD OVER 2.0μm Min.NICKELL							
No.		DESCRIPTION 名 称	QTY 数 量	MATERIAL 材 料					FINISH 仕 上		REMARKS 備 考

SHEET INDEX SH NO.	ISSUE 1	B 2									
TOLERANCES UNLESS OTHERWISE SPECIFIED											
LINEAR	MAT										
	DR <i>M. Hasegawa</i> 12/1/04										
	ENGR <i>M. Hasegawa</i> 12/1/04										
FINISH	CHK <i>M. Hasegawa</i> 7/5/05										
	CUSTOMER COPY										
	THIRD ANGLE PROJ										
ANGLES	APPD <i>M. Hasegawa</i> 7/8/05										
	PRODUCT FAMILY SAF Header CB III Economy										
	CODE JP 10013879										
SCALE 2/1	SIZE C	DWG. NO. 10013879	REV B	SHEET 1 OF 2							

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
1	SKETCHED		M.H	8/27/02
A	RELEASED	J20510	M.H	9/10/02
B	REVISED	J04-0433	M.H	12/1/04

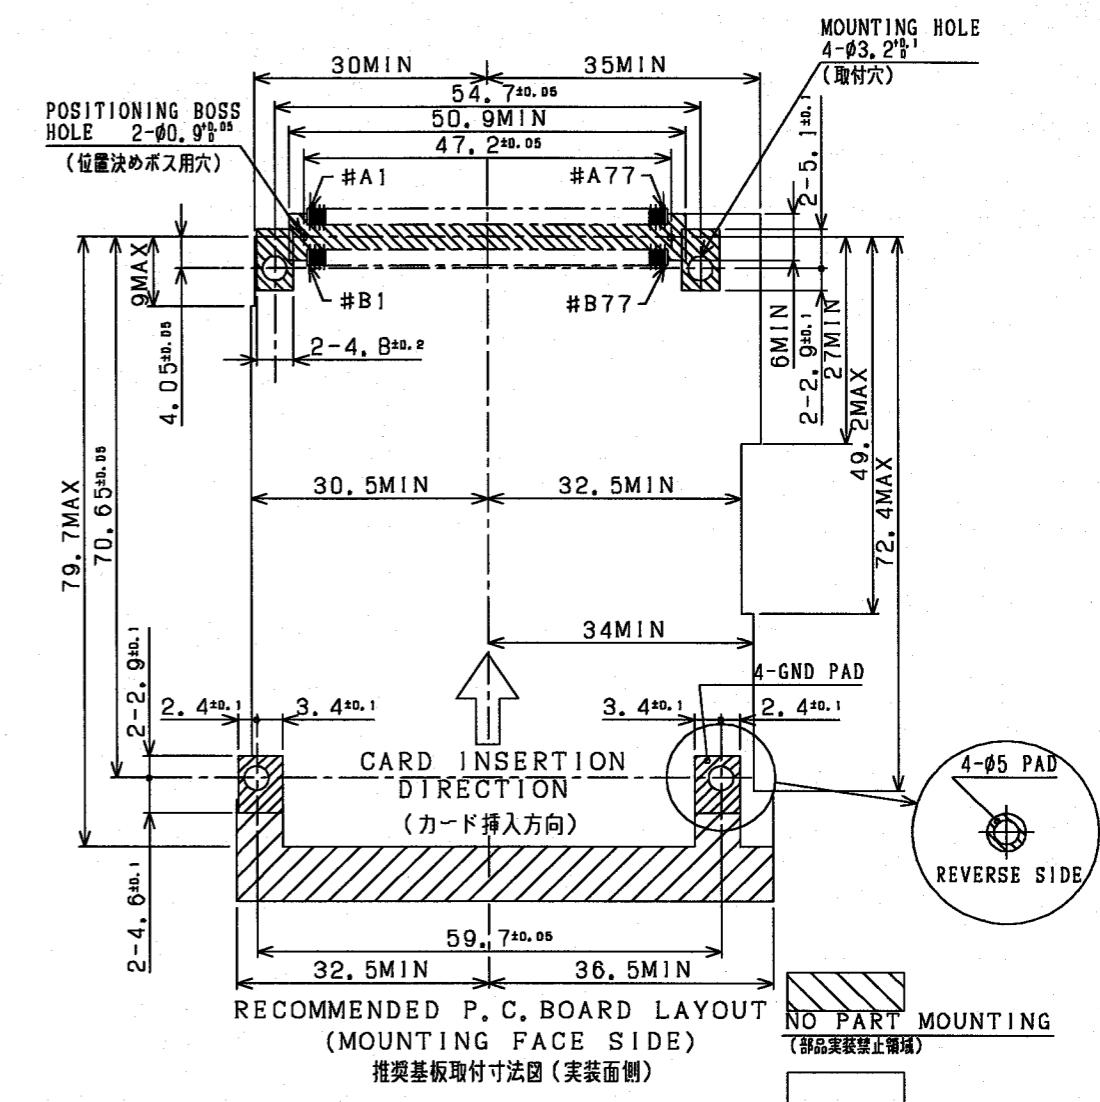
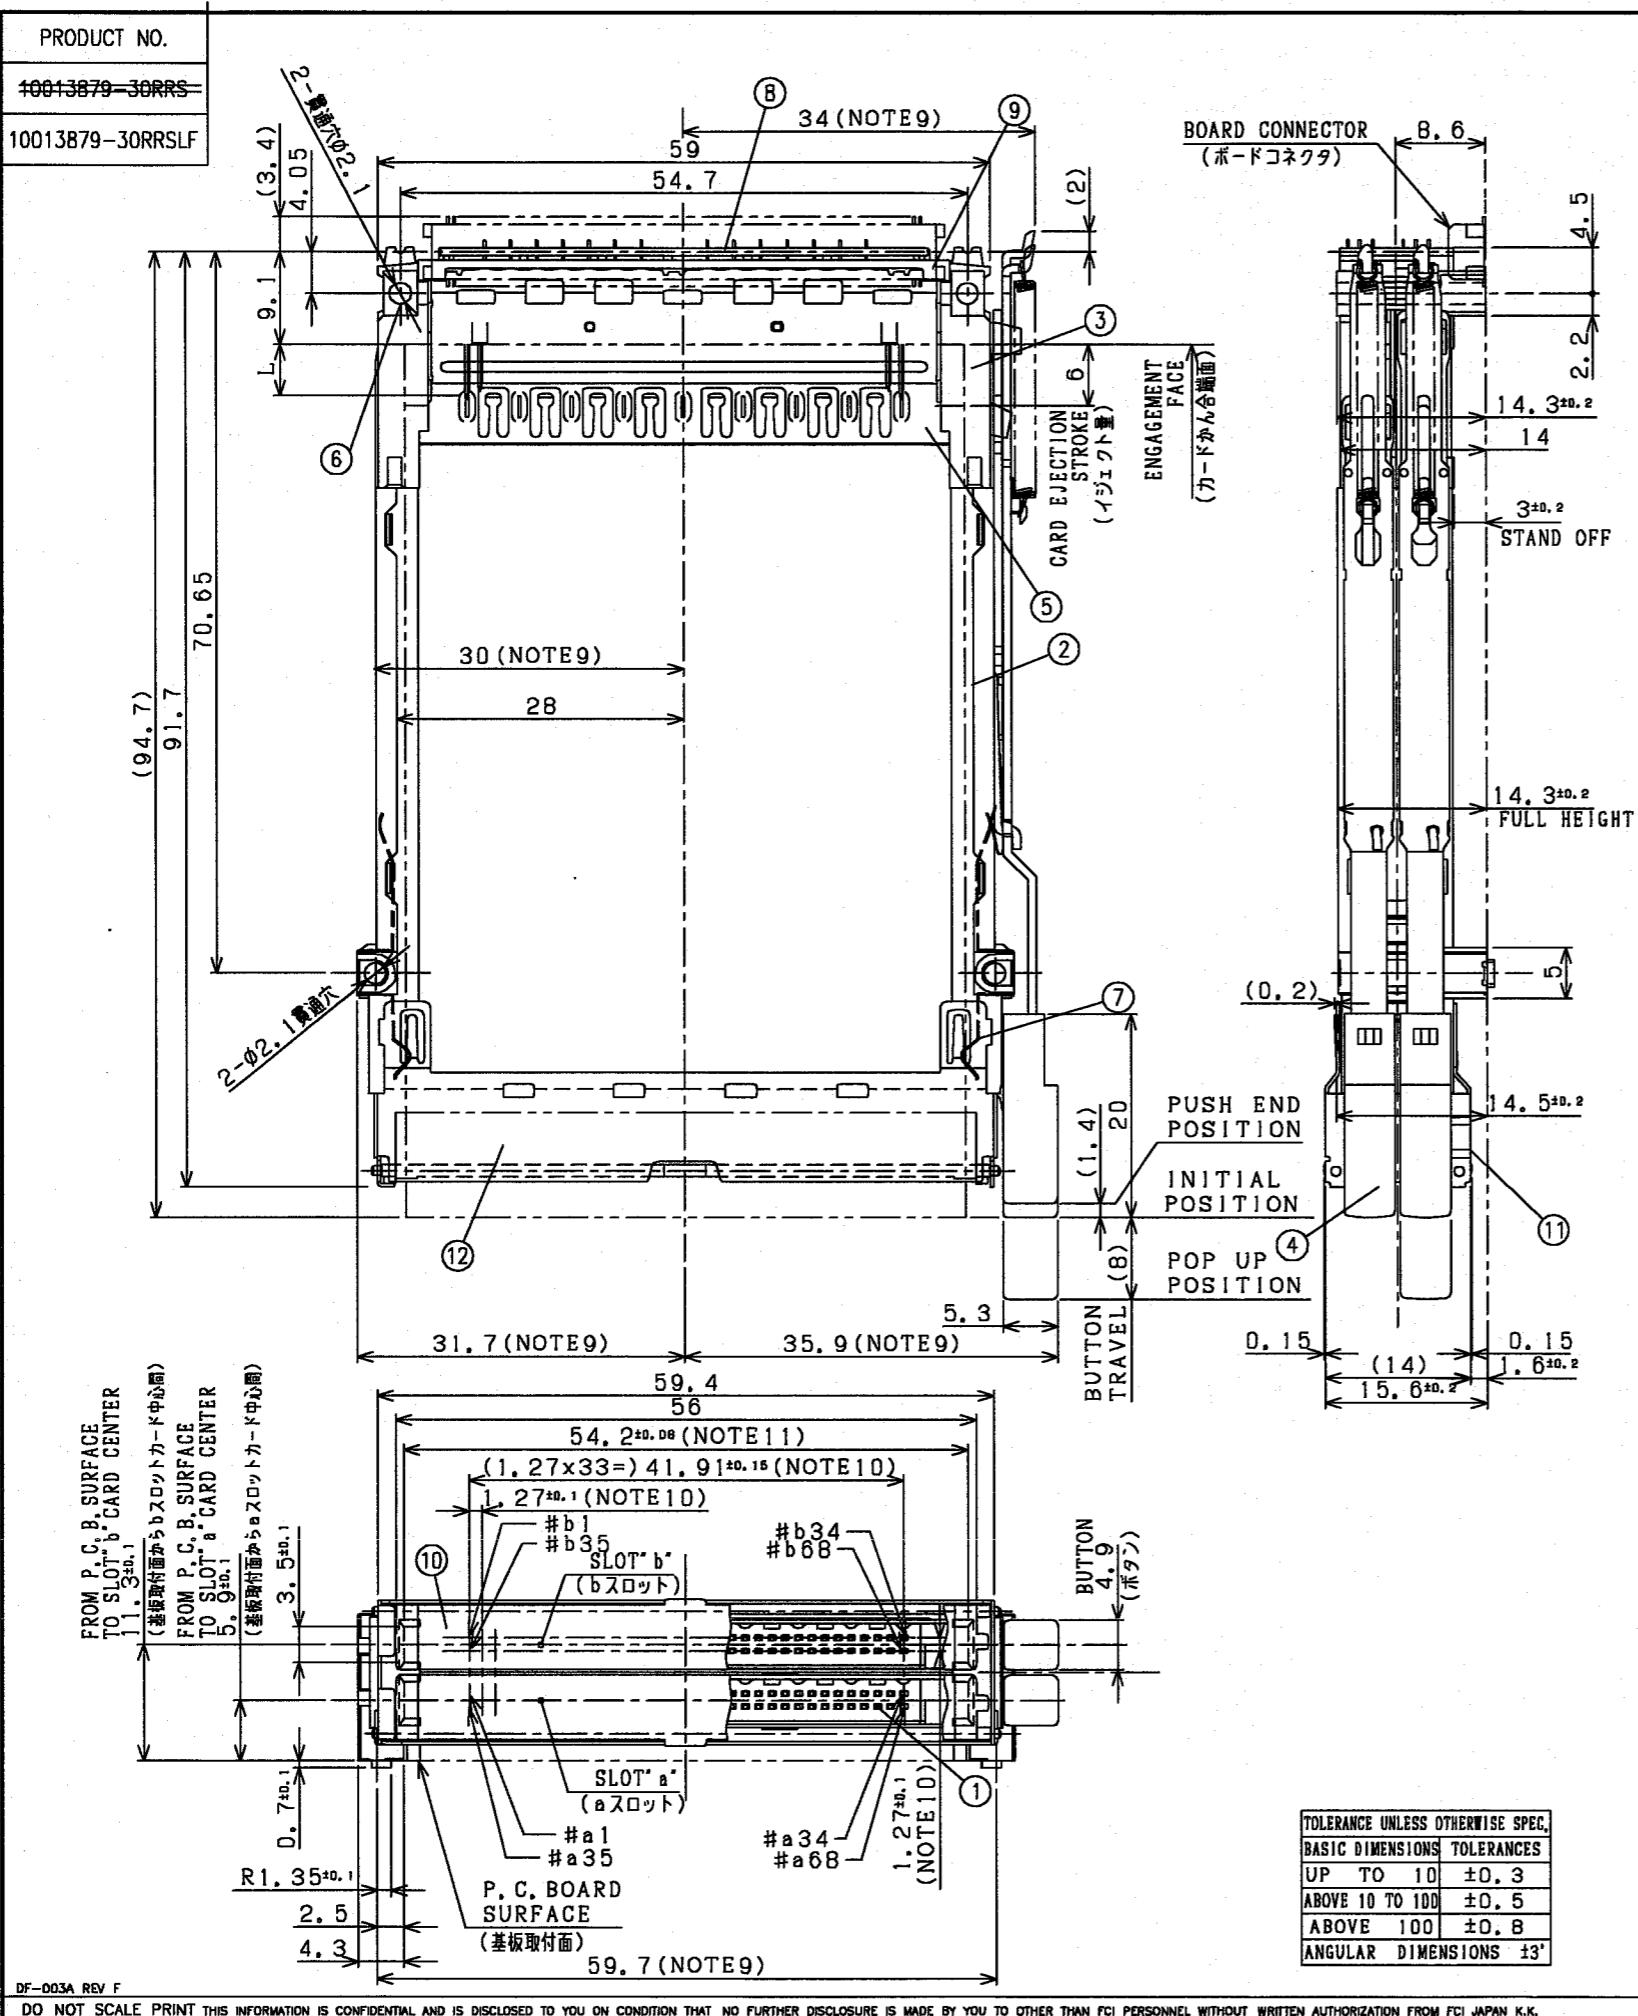


TABLE1 PIN CONTACT LENGTH LIST	
PIN # (タンシ番号)	L (mm)
a1, a17, a34, a35, a51, a68	5.00 <sup>±0.1</sup>
b1, b17, b34, b35, b51, b68	
a36, a67, b36, b67	3.50 <sup>±0.1</sup>
OTHER(上記以外)	4.25 <sup>±0.1</sup>

SHEET INDEX	ISSUE												
	SH NO.												
TOLERANCES UNLESS OTHERWISE SPECIFIED			MAT	DR <i>M. Hasagawa</i>	DATE 12/1/04	CUSTOMER COPY		TITLE 2-STEP SLOT CONNECTOR ABOVE MOUNT WITH SHUTTER					
LINEAR			II	ENGR <i>M. Hasagawa</i>	12/1/04			PRODUCT FAMILY SASF Header CB III Economy					
			FINISH	CHK <i>M. Hasagawa</i>	7/5/05			CODE JP					
ANGLES			II	APPD <i>K. Takemoto</i>	7/5/05	UNIT MM	SCALE 2/1	SIZE C	DWG. NO. 10013879	REV B	SHEET 2 OF		