4mm Flat Top
LED CBI® Circuit Board Indicator
Bi-level

Dialight

552-60xx-200

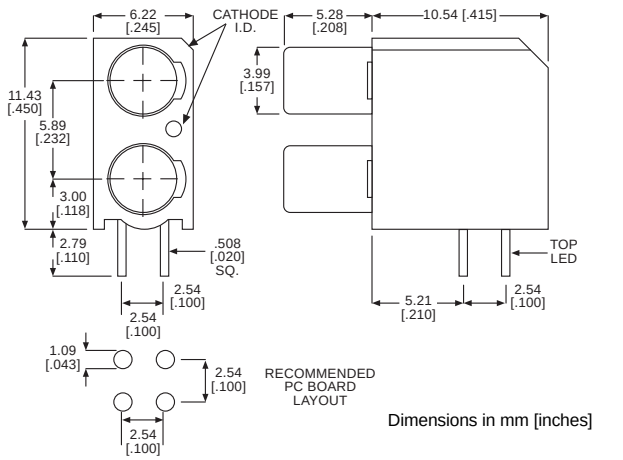

PART NO.	COLOR*
552-6011-200	Red-Red
552-6022-200	Green-Green
552-6023-200	Green-Yellow
552-6032-200	Yellow-Green
552-6033-200	Yellow-Yellow

* Top-Bottom LED

Benefits

- Flat top design for flush panel appearance
- Bi-level design conserves board space
- Single insertion of 2 LEDs
- Black housing enhances contrast
- Housing material meets UL 94V-0
- High reliability - life measured in years
- Housing assures proper LED alignment
- Standoffs on housing facilitate P.C. board cleaning
- Vibration and shock resistant

Custom Combinations

- Contact factory for information on custom color combinations.

LED Data

- For absolute maximum ratings and other electrical/optical data refer to LED data sheet

PART NUMBER ORDERING CODE

Series — LED Type — Top Position — Bottom Position

5 5 2 - 6 0 x x - 2 0 0

Color — Housing

0) Blank 1) Red 2) Green 3) Yellow

CLICK HERE

To Construct Custom Color Combinations of This Part

Typical Operating Characteristics (T_A=25°C)

See LED data sheet for additional information

Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{1/2}$	LED Data sheet	Page #
Red	630	8.7	2	20	145°	521-9706	5-18
Green	565	12.6	2.1	20	150°	521-9708	5-18
Yellow	585	8.7	2.1	20	150°	521-9707	5-18