



CBR1U-D010S  
CBR1U-D020S

**SURFACE MOUNT  
1 AMP ULTRA FAST  
SILICON BRIDGE RECTIFIER**



**SMDIP CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CBR1U-D010S, CBR1U-D020S types are silicon full wave ultra fast bridge rectifiers mounted in a durable epoxy surface mount molded case, utilizing glass passivated chips.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:**

( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

	SYMBOL	CBR1U-D010S	CBR1U-D020S	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	200	V
DC Blocking Voltage	$V_R$	100	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	V
Average Forward Current ( $T_A=40^{\circ}\text{C}$ )	$I_O$		1.0	A
Peak Forward Surge Current	$I_{FSM}$		50	A
Operating and Storage				
Junction Temperature	$T_J, T_{stg}$	-65 to +150		$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{JA}$	40		$^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS PER DIODE: ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)**


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_R$	$V_R=\text{Rated } V_{RRM}$		5.0	$\mu\text{A}$
$I_R$	$V_R=\text{Rated } V_{RRM}, T_A=125^{\circ}\text{C}$		1.0	mA
$V_F$	$I_F=1.0\text{A}$		1.05	V
$t_{rr}$	$I_F=500\text{mA}, I_R=1.0\text{A}, I_{rr}=250\text{mA}$		50	ns

CBR1U-D010S  
CBR1U-D020S

SURFACE MOUNT  
1 AMP ULTRA FAST  
SILICON BRIDGE RECTIFIER



#### SMDIP CASE - MECHANICAL OUTLINE

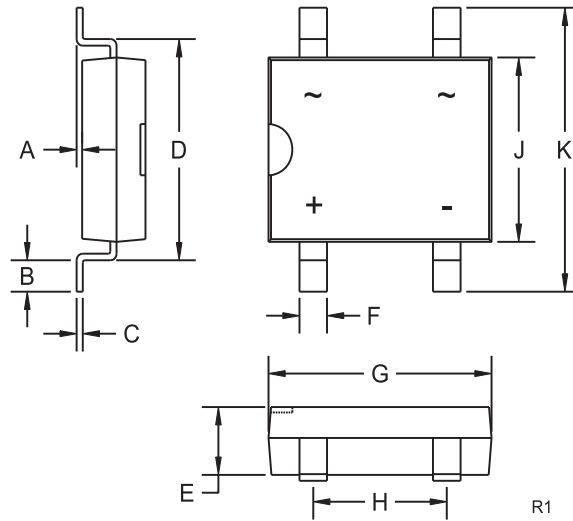

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.008	0.10	0.20
B	0.040	0.060	1.02	1.52
C	0.009		0.23	
D	0.290	0.310	7.37	7.87
E	0.086	0.098	2.18	2.49
F	0.038	0.042	0.97	1.07
G	0.316	0.335	8.03	8.51
H	0.195	0.205	4.95	5.21
J	0.245	0.255	6.22	6.48
K	0.360	0.410	9.14	10.41

SMDIP (REV: R1)

MARKING: FULL PART NUMBER

R3 (4-January 2010)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)



<http://www.centrasemi.com>

PDN01092

7/18/18

1/18/19

7/18/19

Summary: All 1.0 Amp Ultra-Fast Recovery Bridge Rectifiers in the SMDIP package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

<u>Central Part Number</u>	<u>Replacement</u>
CBR1U-D010S	N/A
CBR1U-D010S TR13	N/A
CBR1U-D020S	N/A
CBR1U-D020S TR13	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to [engineering@centrasemi.com](mailto:engineering@centrasemi.com).