
MALLORY Mallory Sonalert Products,Inc. Part #: MSR320SR Sales Outline Drawing Revision: E

Specifications:

| Sound Level Category | Medium | |
|-----------------------|-----------------------------|--|
| Mode of Operation | Continuous | |
| Voltage Rating | 3 to 20 VDC | |
| Frequency | 3500 ± 500 Hz | |
| Loudness @ 1 FT | 73 to 86 dB(A) Typ. | |
| Current Draw | 3-16 mA | |
| Housing Material | Valox (UL94V-0), Color Blue | |
| Storage Temperature | -40° to +85° C | |
| Operating Temperature | -40° to +85° C | |
| Weight (Typical) | 3.5g | |
| Options | Please contact factory. | |

Dimensions: Inches (mm) ROHS Compliant

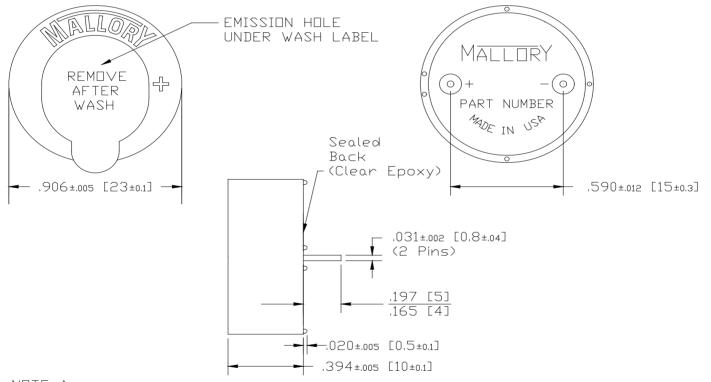

NOTE A: TERMINALS - .031" DIA, NICKEL/TIN COATED BRASS,

NOTE B:

MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING AND AQUEAUS WASH WHEN THE EMISSION HOLE IS COVERED WITH A WASH LABEL. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

MALLORY MALLORY SONALERT PRODUCTS, INC.

MSR & MSO Series Buzzers

Aqueous Wash:

In order to process MSR & MSO Series buzzers through an aqueous wash, the buzzer must have a wash label and be sealed on the back with epoxy. Sealed buzzers have a "SR" suffix in the part number. For example, P/N MSR320SR is sealed and appropriate for aqueous wash. P/N MSR320R is not sealed.

After aqueous wash, the wash label must be removed from the buzzer.

Wave Solder Profile:

Refer to the wave solder machine manufacturer's recommended wave solder profile. If needed, adjust the maximum time & temperature to 270°C for 3 seconds to process MSR & MSO series buzzers.

Moisture Sensitivity Level (MSL): Level 1 (Unlimited)

Packaging: All parts are bulk packed.

Origin: Made in USA

Sound Level vs Distance:

Sound level decreases as the sound waves travel over distance, so it is important to note the specified distance when comparing sound levels. For example, if a buzzer measures 88 decibels (dB) at 30 cm, then it will measure:

97 dB @ 10 cm

82 dB @ 60 cm

78 dB @ 1 Meter

Mallory Sonalert has developed a tool to help convert sound levels depending on the distance. You can download the tool from our website: http://www.mallory-sonalert.com/PerformanceCurves/Sound%20Level%20Distance%20Conversion%2 https://www.mallory-sonalert.com/PerformanceCurves/Sound%20Level%20Distance%20Conversion%2 https://www.mallory-sonalert.com/PerformanceCurves/Sound%20Level%20Distance%20Conversion%2 https://www.mallory-sonalert.com/PerformanceCurves/Sound%20Level%20Distance%20Conversion%2">https://www.mallory-sonalert.com/PerformanceCurves/Sound%20Level%20Distance%20Conversion%2 https://www.mallory-sonalert.com/ https:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert: MSR320SR