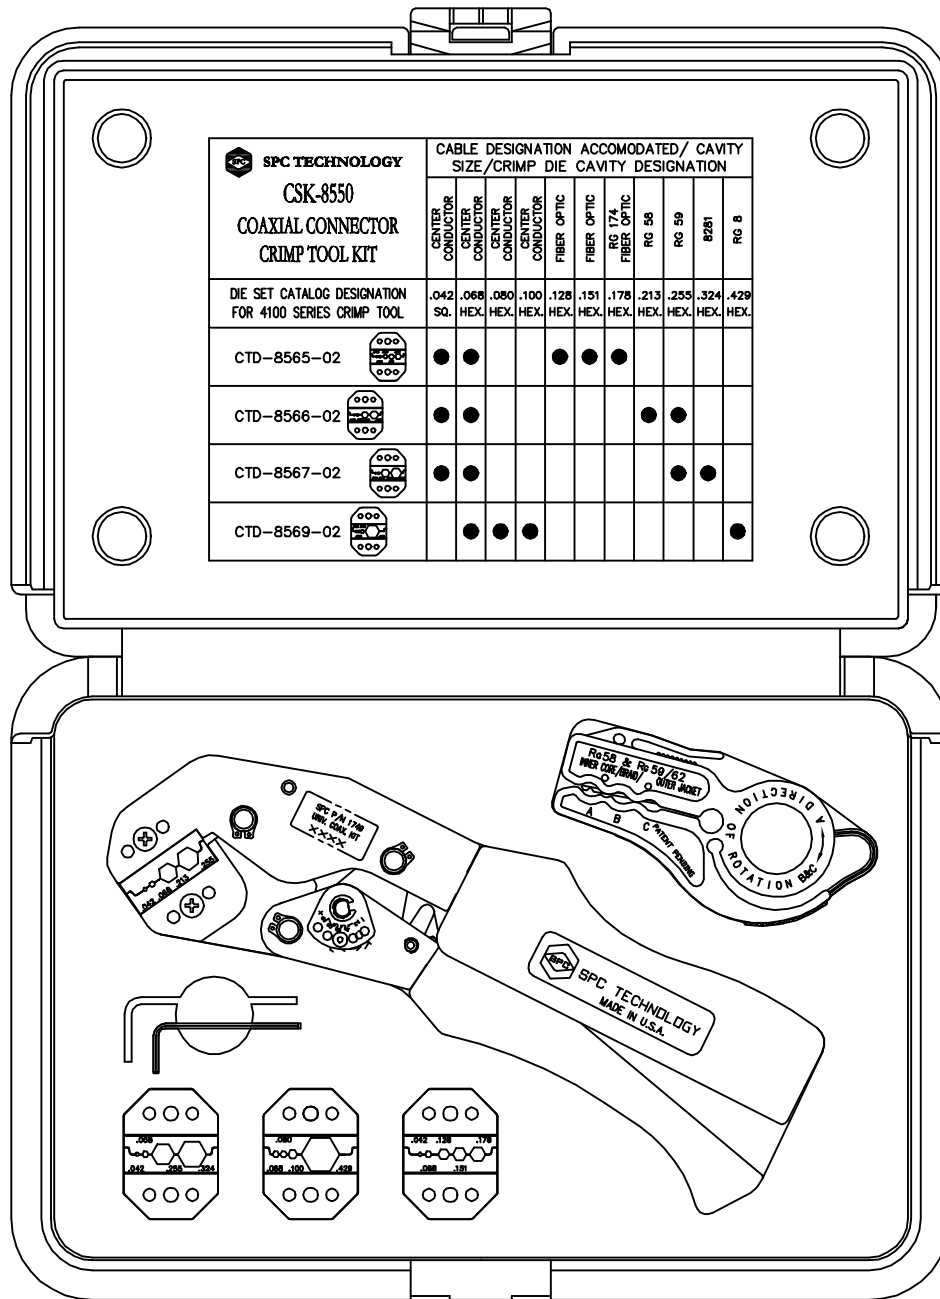


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

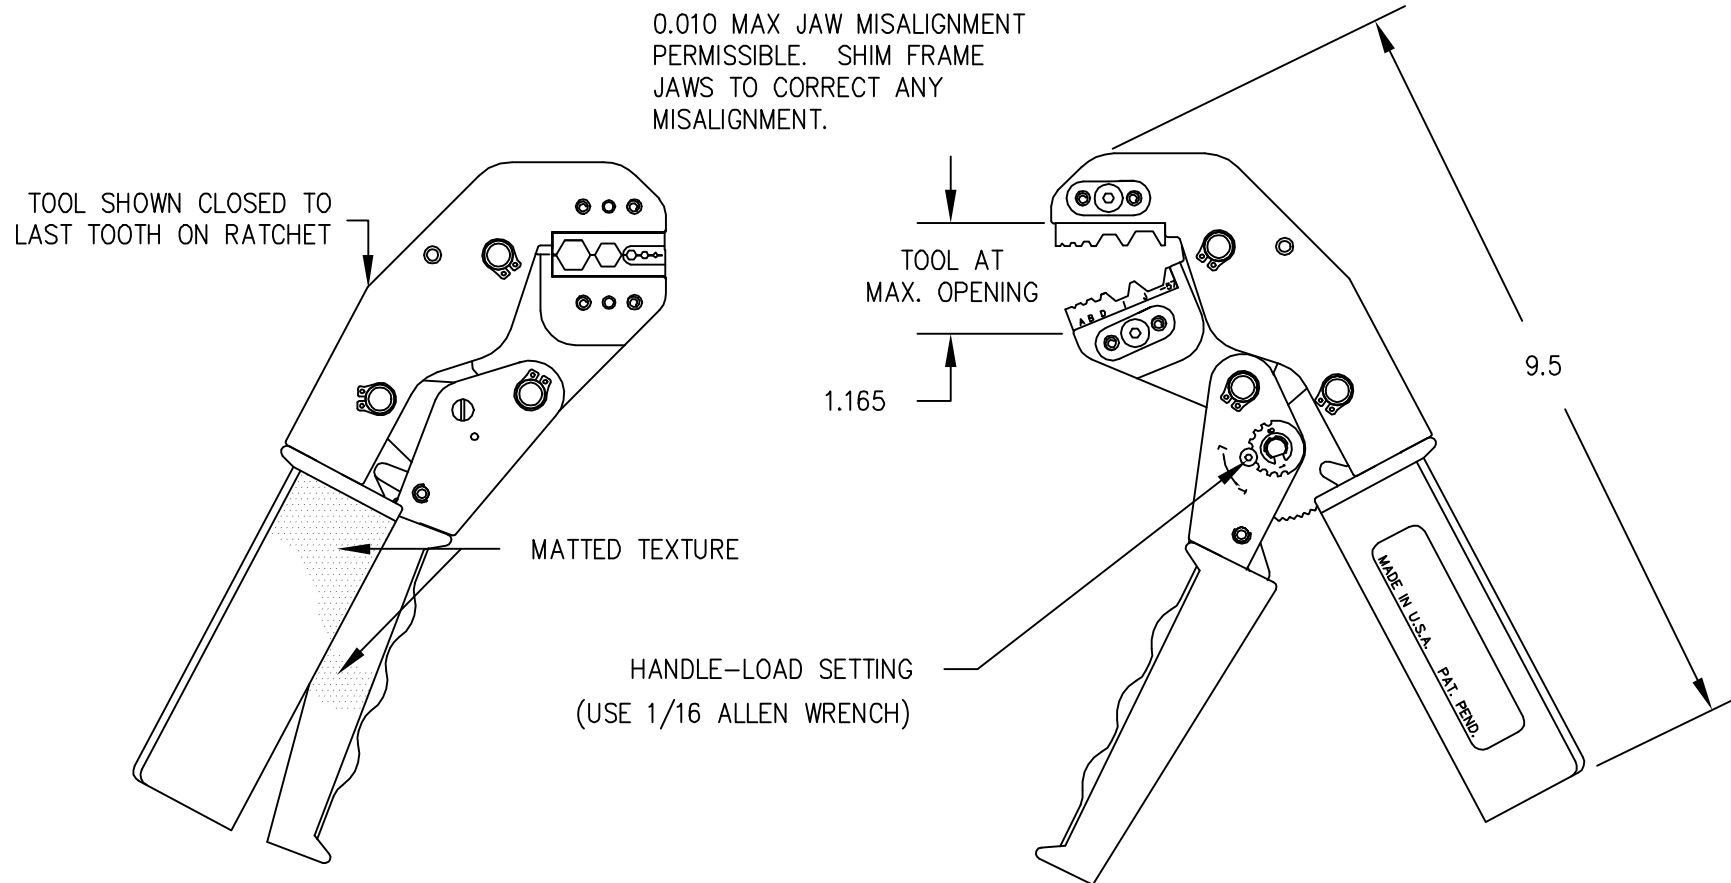
REVISIONS				DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
149	B	Redrawn & Updated		J.W.M.	2/23/98	J.C.	10/3/99	JC	10/3/99



HEAT TREATED P/M DIES - HEAT TREATED FRAME COMPONENTS.
 BLACK OXIDE FINISH ON FRAME & DIES
 FULL CYCLE RATCHET CONTROLLED RELEASE
 RATCHET SET TO RELEASE WHEN A 35-50 LB. LOAD IS APPLIED APPROX. 1 3/4" FROM END OF HANDLES.
 ROYAL BLUE TEXTURED PLASTIC GRIPS WITH
 PAD PRINTED LOGO (WHITE INK).

SPC-F004.DWG

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.			 SPC TECHNOLOGY		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:		
	Jeff McVicker	2/23/98	Coaxial Connector Crimp Tool Kit		
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE
	JOHN COLE		A	CSK-8550	90N3319.dwg
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]
			SHEET: 1 OF 3		REV B



NOTES:

1. MATERIAL: FRAME: #1065 HIGH CARBON STEEL
FINISH: BLACK OXIDE
GRIP HANDLE COLOR: ORANGE
2. HEAT TREAT: ALL FRAME COMPONENTS HEAT TREATED TO ROCKWELL C 43 TO 47
3. FLAMMABILITY: (ABS) UL94V-HB
4. CONTINUOUS USE TEMPERATURE (ABS): -40°F (-40°C) TO 176°F (80°C)
5. FULL CYCLE RATCHET CONTROL RELEASE
6. RATCHET SET TO RELEASE WHEN A 35-50 LB LOAD IS APPLIED
APPROXIMATELY 1.75 FROM END OF HANDLES.

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	CSK-8550	90N3319.dwg	B
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 2 OF 3







SPC TECHNOLOGY

CSK-8550

COAXIAL CONNECTOR

CRIMP TOOL KIT

CABLE DESIGNATION ACCOMODATED/ CAVITY
SIZE/CRIMP DIE CAVITY DESIGNATION

	CENTER CONDUCTOR	CENTER CONDUCTOR	CENTER CONDUCTOR	CENTER CONDUCTOR	FIBER OPTIC	FIBER OPTIC	RG 174 FIBER OPTIC	RG 58	RG 59	8281	RG 8
DIE SET CATALOG DESIGNATION FOR 4100 SERIES CRIMP TOOL	.042 SQ.	.068 HEX.	.080 HEX.	.100 HEX.	.128 HEX.	.151 HEX.	.178 HEX.	.213 HEX.	.255 HEX.	.324 HEX.	.429 HEX.
CTD-8565-02 											
CTD-8566-02 											
CTD-8567-02 											
CTD-8569-02 											

SIZE A	DWG. NO. CSK-8550	ELECTRONIC FILE 90N3319.dwg	REV B
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 3 OF 3	