

LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	REVISED PER ECO 07-015108	26JUN2007	DW	FB



- 1 ZINC PER QQ-Z-363.
- 2 BERYLLIUM COPPER PER QQ-C-530.
- 3 PTFE PER MIL-P-19468.
- 4 NICKEL PLATE PER QQ-N-290,
3.81µm [.000150] MINIMUM THICK.
- 5 TIN PLATE PER ASTM-B-545,
3.04µm [.000120] MINIMUM THICK OVER
NICKEL PLATE PER MIL-C-26074,
7.62µm [.000300] MINIMUM THICK.
- 6 GOLD PLATE PER MIL-G-45204,
1.27µm [.000050] MINIMUM THICK.
7. INTERFACE PER MIL-C-39012.
- 8 POLYMETHYLPENTENE, GENERAL PURPOSE

D

C

B

A

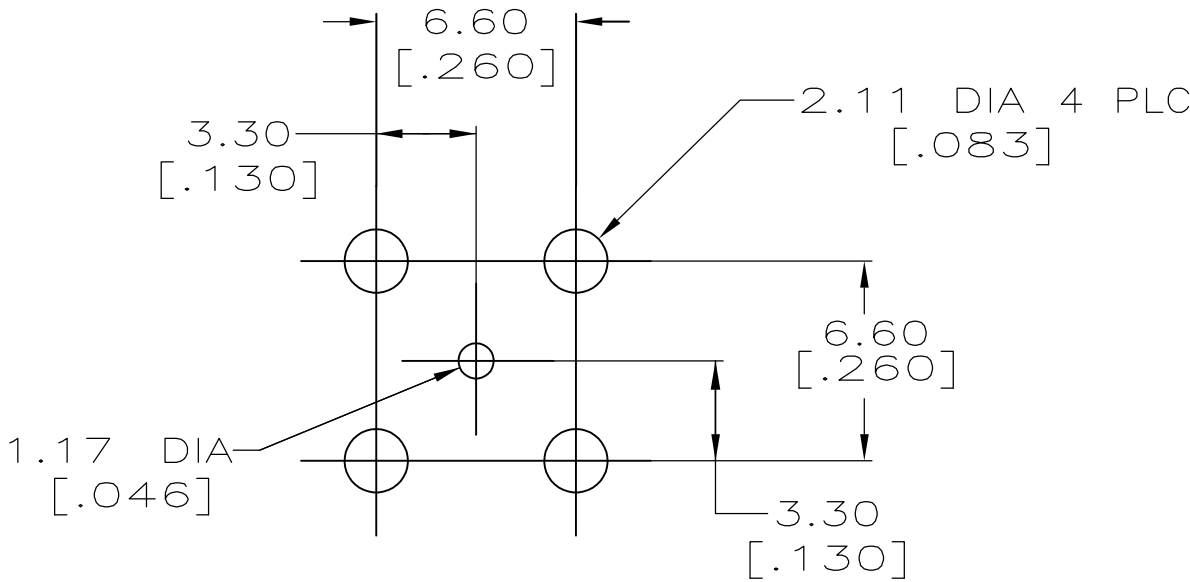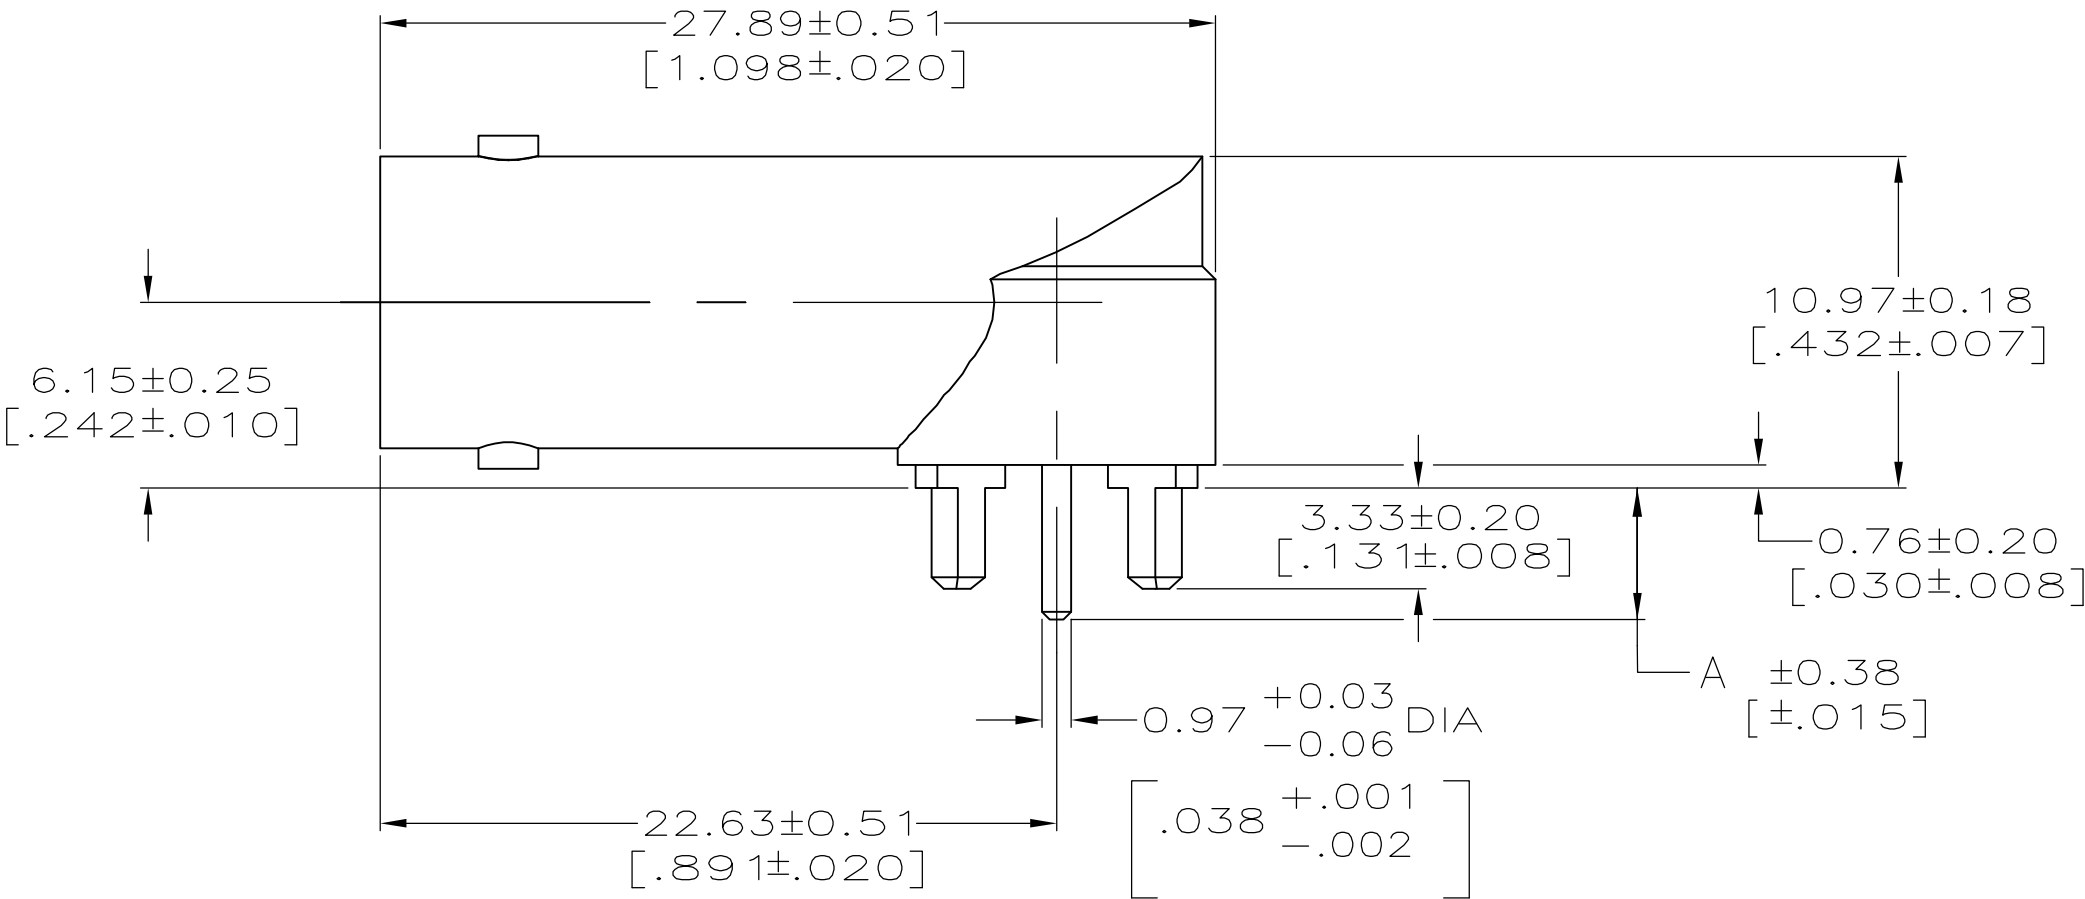

PCB CONFIGURATION

3.33 [.131]	4	3	5413631-5
3.33 [.131]	4	8	5413631-3
4.34 [.171]	5	3	5413631-2
4.34 [.171]	4	8	5413631-1
A	FINISH: SHELL	MATERIAL: DIELECTRIC, FRONT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MCMMASTER 03JAN05	tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608				
		CHK J.LIPPERT 03JAN05					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.LIPPERT 03JAN05	NAME JACK, RIGHT ANGLE, PCB, 50 OHM, SERIES BNC				
	0 PLC ± -	PRODUCT SPEC					
	1 PLC ± -	APPLICATION SPEC -					
	2 PLC ± 0.08 [.003]						
	3 PLC ± -						
	4 PLC ± -						
	ANGLES ± ±						
MATERIAL	FINISH	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-5413631	RESTRICTED TO -	
SEE NOTES 1-3	SEE NOTES 4-6	CUSTOMER DRAWING			SCALE 4:1	SHEET 1 of 1	REV B2