molex®
one company > a world of innovation

Part Number: **64322-1029**

Status: **Active**

Overview: CMC Sealed, Hybrid, Modular Connectors and Headers

Description: 0.635mm CMC CP Female Terminal, Tin Plated, for Square 0.6mm x 0.6mm Pins, Wire Size 0.75mm²

Documents:

3D Model	Application Specification AS-64319-002-SP (PDF)
Drawing (PDF)	Application Specification AS-64322-001 (PDF)
Product Specification PS-64318-001 (PDF)	Application Specification AS-98420-001 (PDF)
Product Specification PS-64319-002 (PDF)	Application Specification AS-98420-001-FR (PDF)
Product Specification PS-64326-001 (PDF)	Application Specification AS-98420-001-SP (PDF)
Application Specification AS-64318-002 (PDF)	Application Specification AS-98420-002 (PDF)
Application Specification AS-64318-002-FR (PDF)	Application Specification AS-98420-002-CH (PDF)
Application Specification AS-64318-002-SP (PDF)	Application Specification AS-98420-002-FR (PDF)
Application Specification AS-64319-002 (PDF)	Application Specification AS-98420-002-SP (PDF)
Application Specification AS-64319-002-CH (PDF)	Packaging Specification PK-98913-001 (PDF)
Application Specification AS-64319-002-FR (PDF)	RoHS Certificate of Compliance (PDF)
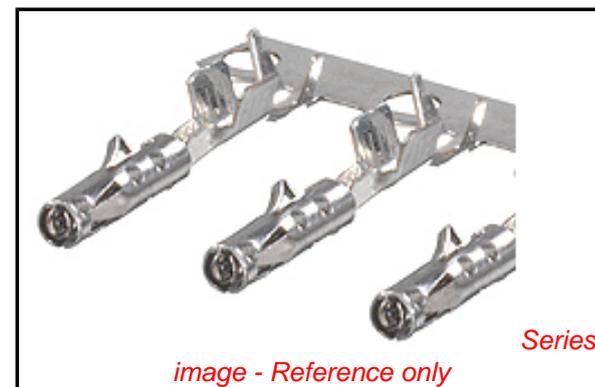
General

Product Family	Crimp Terminals
Series	64322
Application	Signal
Comments	* Current tested on a 5 terminals loaded connector, current for temperature increase of 40°C. Current max = 6A for 0.635mm Terminal(0.75mm² wire)
Crimp Quality Equipment	Yes
Overview	CMC Sealed, Hybrid, Modular Connectors and Headers
Product Name	CMC, CP Terminal
UPC	883906129477

Physical

Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.160/g
Packaging Type	Reel
Plating min - Mating	1.524µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.65-1.80mm
Wire Size AWG	18
Wire Size mm²	0.75

Electrical

Current - Maximum per Contact	6A
Voltage - Maximum	14V DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-64318-002, AS-64318-002-FR, AS-64318-002-SP, AS-64319-002, AS-64319-002-CH, AS-64319-002-FR, AS-64319-002-SP, AS-64322-001, AS-98420-001, AS-98420-001-FR, AS-98420-001-SP, AS-98420-002, AS-98420-002-CH, AS-98420-002-FR, AS-98420-002-SP

*Series
image - Reference only*

EU RoHS   **China RoHS**

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series

64322Series

Mates With

CMC Connector 64318 , 64319 , 64320 , 64321 , 64326

Use With

CMC Connector 64318 , 64319 , 64320 , 64321 , 64326

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool	0638119200
FineAdjust™ Applicator for CP Crimp 0.6mm	0639022000

Packaging Specification	PK-98913-001	Terminal for CMC
Product Specification	PS-64318-001, PS-64319-002, PS-64326-001	connector
Sales Drawing	SD-64322-001	Extraction Tool 0638132400

This document was generated on 07/01/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex](#):
  [64322-1029](#)   [64322-1029 (Cut Strip)](#)   [64322-1029 (Mouser Reel)](#)