


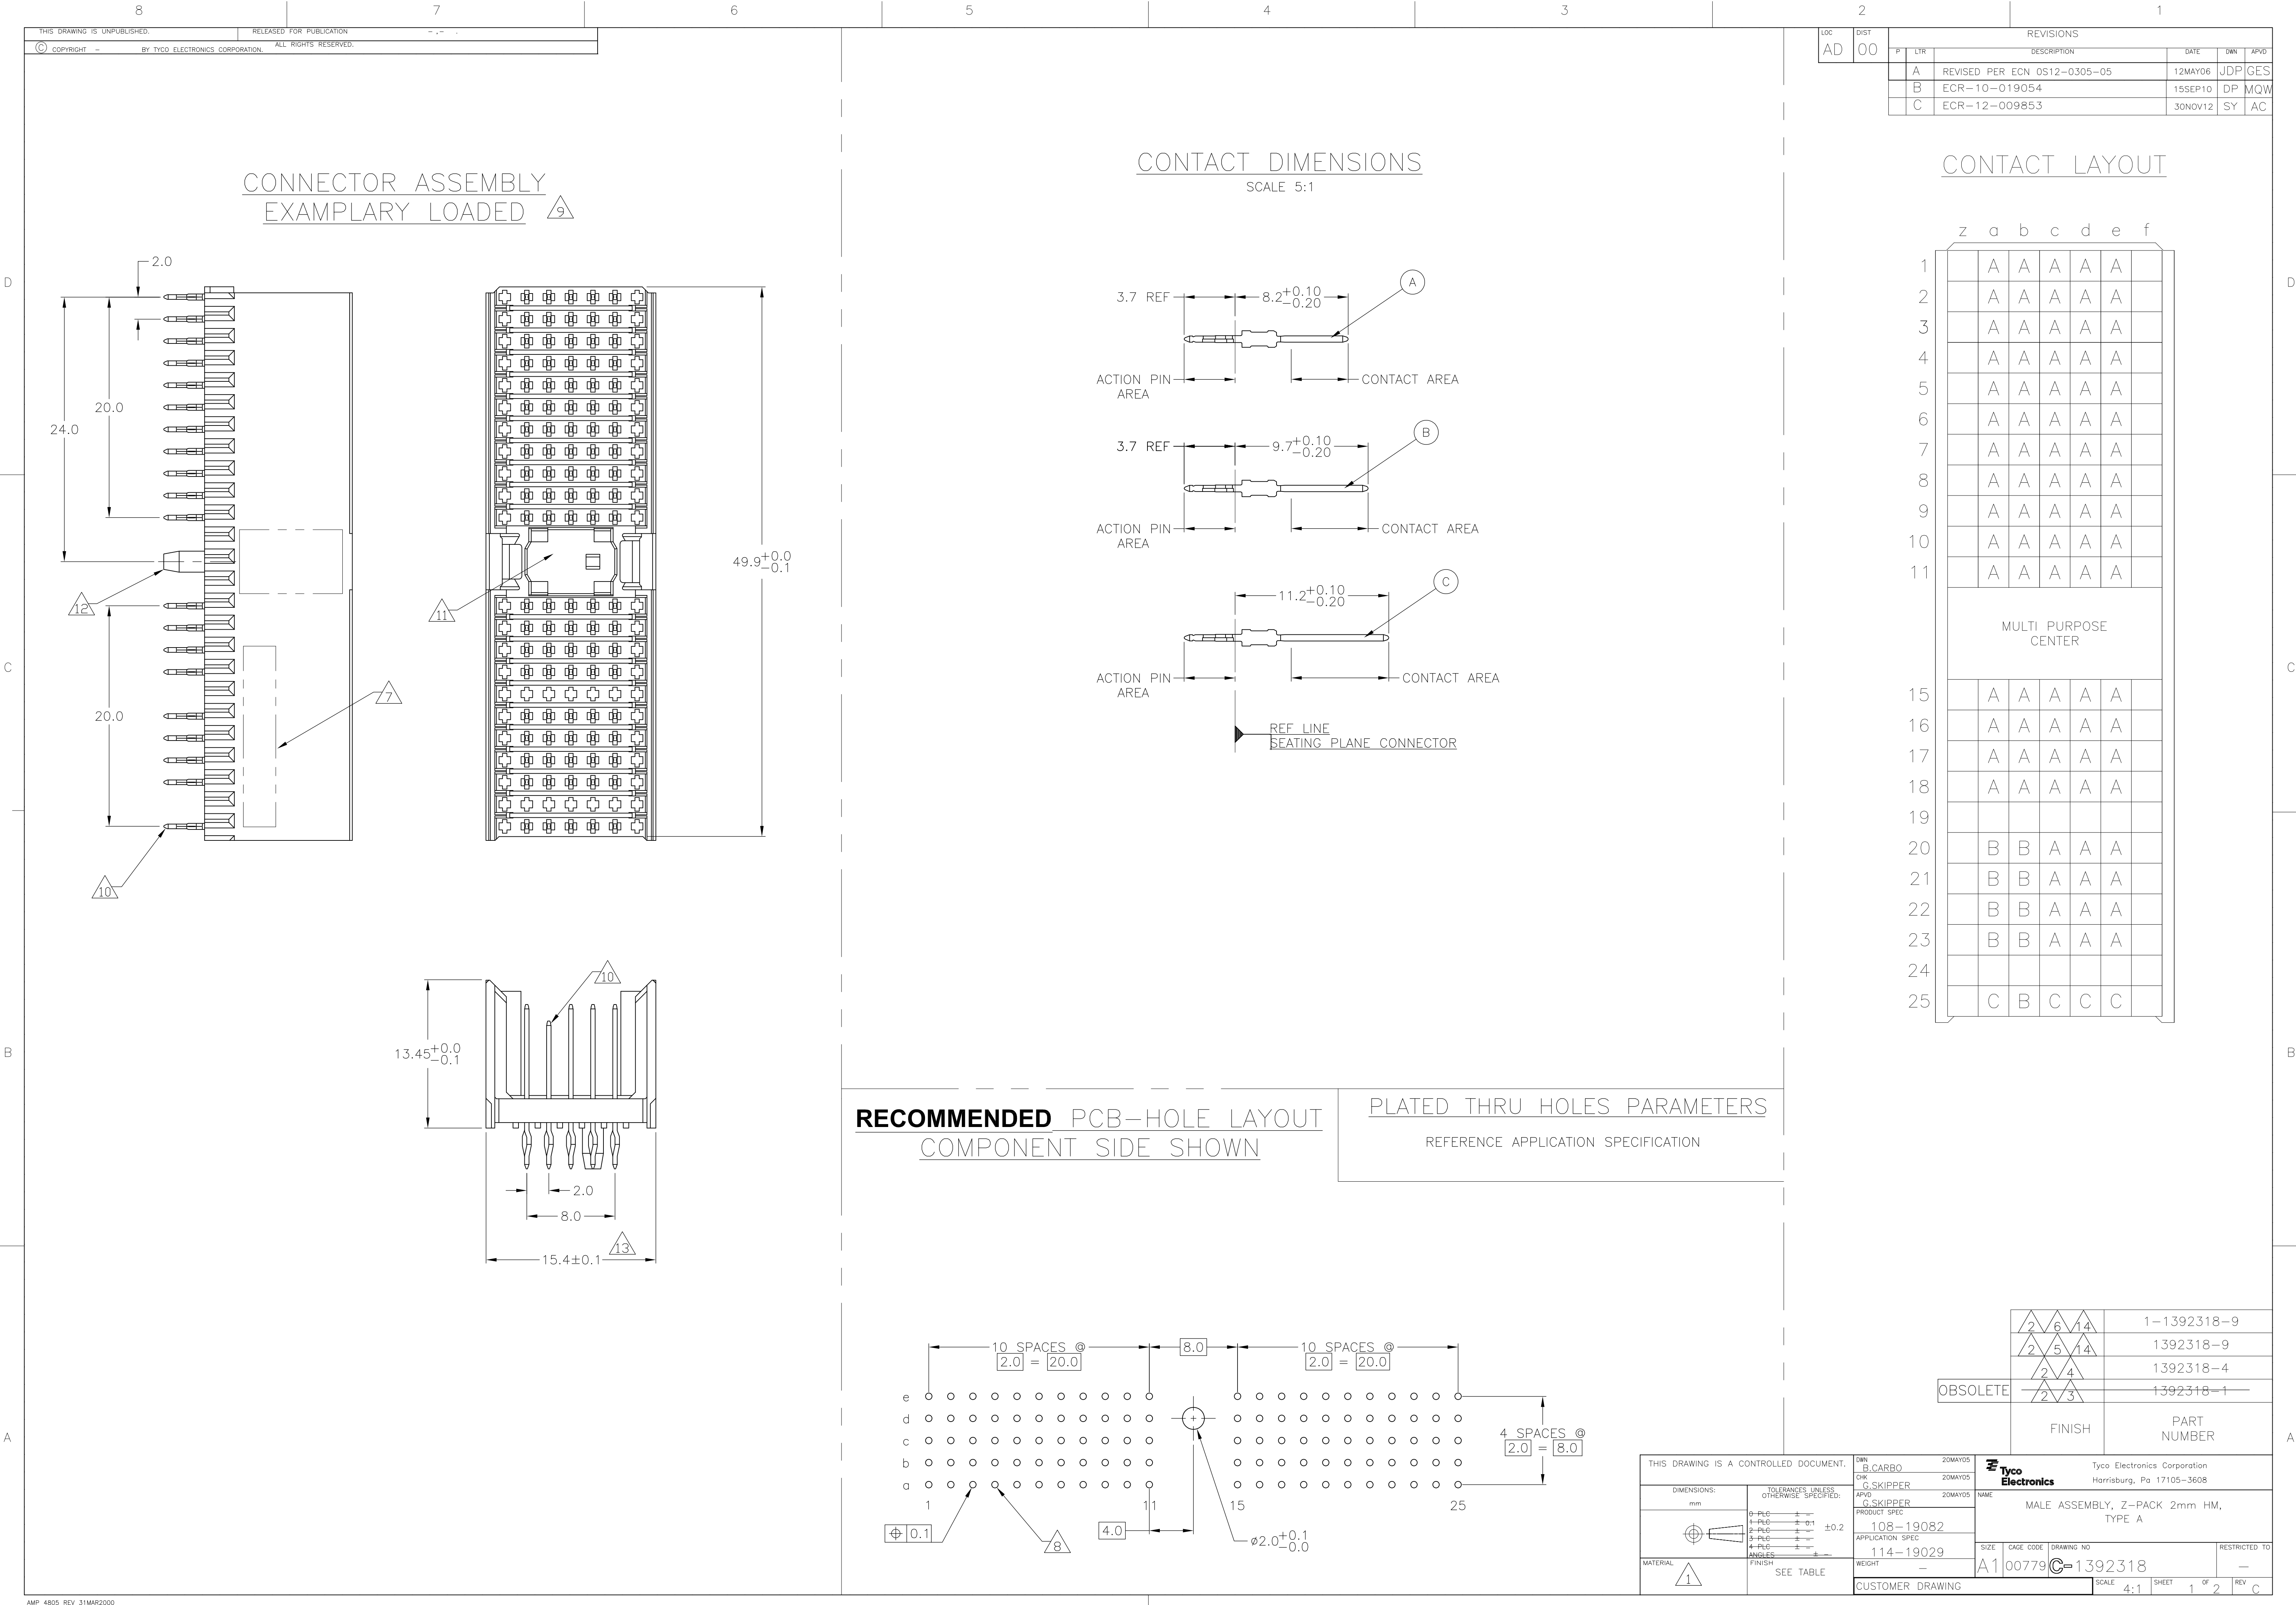

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT —

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27μm MIN NICKEL AND ACTION
PIN: 0.5μm MIN TIN/LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

AREA RESERVED FOR KEYING PART (BASIC P/N 100525)

12

POLARIZATION FEATURE.

13

TO BE MEASURED AT BOTTOM OF SHROUD.

14

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

LOC

DIST

AD

00

REV

1

LTR

DESCRIPTION

DATE

DWN

APVD

—

SEE SHEET 1

—

—

—

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

B CARBO

20MAY05

CHK

G.SKIPPER

20MAY05

APVD

G.SKIPPER

20MAY05

DIMENSIONS:

mm

0-PLG

1-PLG

2-PLG

3-PLG

4-PLG

ANGLES

FINISH

±

±

±

±

±

±

SEE SHEET 1

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

±0.2

PRODUCT SPEC

108-19082

APPLICATION SPEC

114-19029

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

1392318

—

CUSTOMER DRAWING

SCALE

4:1

SHEET

2

OF

2

REV

C

Tyco

Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

MALE ASSEMBLY, Z-PACK 2mm HM,
TYPE A

AMP 4805 REV 31MAR2000