



### General Description

The AO7417 uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as 1.5V, in the small SOT363 footprint. This device is suitable for use in buck convertor.

### Product Summary


|                                   |                 |
|-----------------------------------|-----------------|
| $V_{DS}$                          | -20V            |
| $I_D$ (at $V_{GS}=-4.5V$ )        | -2A             |
| $R_{DS(ON)}$ (at $V_{GS}=-4.5V$ ) | < 80m $\Omega$  |
| $R_{DS(ON)}$ (at $V_{GS}=-2.5V$ ) | < 100m $\Omega$ |
| $R_{DS(ON)}$ (at $V_{GS}=-1.8V$ ) | < 125m $\Omega$ |
| $R_{DS(ON)}$ (at $V_{GS}=-1.5V$ ) | < 150m $\Omega$ |





SC-70-6  
(SOT-323)

Top View

Bottom View

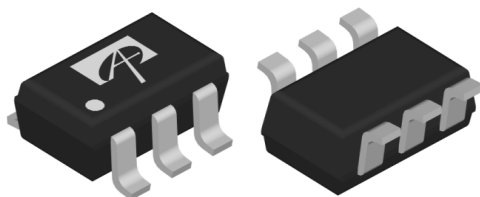

Top View



### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

| Parameter                              | Symbol         | 10 Sec     | Steady State | Units            |
|----------------------------------------|----------------|------------|--------------|------------------|
| Drain-Source Voltage                   | $V_{DS}$       | -20        |              | V                |
| Gate-Source Voltage                    | $V_{GS}$       | $\pm 8$    |              | V                |
| Continuous Drain Current <sup>A</sup>  | $I_D$          | -2         | -1.9         | A                |
| $T_A=25^\circ\text{C}$                 |                |            |              |                  |
| $T_A=70^\circ\text{C}$                 |                | -1.7       | -1.6         |                  |
| Pulsed Drain Current <sup>B</sup>      | $I_{DM}$       | -20        |              |                  |
| Power Dissipation <sup>A</sup>         | $P_D$          | 0.63       | 0.57         | W                |
| $T_A=25^\circ\text{C}$                 |                |            |              |                  |
| $T_A=70^\circ\text{C}$                 |                | 0.4        | 0.36         |                  |
| Junction and Storage Temperature Range | $T_J, T_{STG}$ | -55 to 150 |              | $^\circ\text{C}$ |

### Thermal Characteristics

| Parameter                                | Symbol          | Typ | Max | Units              |
|------------------------------------------|-----------------|-----|-----|--------------------|
| Maximum Junction-to-Ambient <sup>A</sup> | $R_{\theta JA}$ | 160 | 200 | $^\circ\text{C/W}$ |
| $t \leq 10s$                             |                 |     |     |                    |
| Maximum Junction-to-Ambient <sup>A</sup> | $R_{\theta JA}$ | 180 | 220 | $^\circ\text{C/W}$ |
| Steady-State                             |                 |     |     |                    |
| Maximum Junction-to-Lead <sup>C</sup>    | $R_{\theta JL}$ | 130 | 160 | $^\circ\text{C/W}$ |
| Steady-State                             |                 |     |     |                    |

**Electrical Characteristics (T<sub>j</sub>=25°C unless otherwise noted)**

| Symbol                      | Parameter                             | Conditions                                                                                 | Min  | Typ      | Max       | Units |
|-----------------------------|---------------------------------------|--------------------------------------------------------------------------------------------|------|----------|-----------|-------|
| <b>STATIC PARAMETERS</b>    |                                       |                                                                                            |      |          |           |       |
| BV <sub>DSS</sub>           | Drain-Source Breakdown Voltage        | I <sub>D</sub> =-250μA, V <sub>GS</sub> =0V                                                | -20  |          |           | V     |
| I <sub>DSS</sub>            | Zero Gate Voltage Drain Current       | V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V<br>T <sub>j</sub> =55°C                         |      |          | -1<br>-5  | μA    |
| I <sub>GSS</sub>            | Gate-Body leakage current             | V <sub>DS</sub> =0V, V <sub>GS</sub> =±8V                                                  |      |          | ±100      | nA    |
| V <sub>GS(th)</sub>         | Gate Threshold Voltage                | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA                                  | -0.5 | -0.65    | -1        | V     |
| I <sub>D(ON)</sub>          | On state drain current                | V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-5V                                               | -20  |          |           | A     |
| R <sub>DS(ON)</sub>         | Static Drain-Source On-Resistance     | V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-2A<br>T <sub>j</sub> =125°C                       |      | 65<br>90 | 80<br>110 | mΩ    |
|                             |                                       | V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-1.8A                                              |      | 80       | 100       | mΩ    |
|                             |                                       | V <sub>GS</sub> =-1.8V, I <sub>D</sub> =-1.5A                                              |      | 100      | 125       | mΩ    |
|                             |                                       | V <sub>GS</sub> =-1.5V, I <sub>D</sub> =-0.5A                                              |      | 115      | 150       | mΩ    |
|                             |                                       |                                                                                            |      |          |           |       |
| g <sub>FS</sub>             | Forward Transconductance              | V <sub>DS</sub> =-5V, I <sub>D</sub> =-2A                                                  |      | 10       |           | S     |
| V <sub>SD</sub>             | Diode Forward Voltage                 | I <sub>S</sub> =-1A, V <sub>GS</sub> =0V                                                   |      | -0.7     | -1        | V     |
| I <sub>S</sub>              | Maximum Body-Diode Continuous Current |                                                                                            |      |          | -1        | A     |
| <b>DYNAMIC PARAMETERS</b>   |                                       |                                                                                            |      |          |           |       |
| C <sub>iss</sub>            | Input Capacitance                     | V <sub>GS</sub> =0V, V <sub>DS</sub> =-10V, f=1MHz                                         |      | 560      | 745       | pF    |
| C <sub>oss</sub>            | Output Capacitance                    |                                                                                            |      | 80       |           | pF    |
| C <sub>rss</sub>            | Reverse Transfer Capacitance          |                                                                                            |      | 70       |           | pF    |
| R <sub>g</sub>              | Gate resistance                       | V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, f=1MHz                                           |      | 15       | 23        | Ω     |
| <b>SWITCHING PARAMETERS</b> |                                       |                                                                                            |      |          |           |       |
| Q <sub>g</sub>              | Total Gate Charge                     | V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-10V, I <sub>D</sub> =-2A                         |      | 8.5      | 11        | nC    |
| Q <sub>gs</sub>             | Gate Source Charge                    |                                                                                            |      | 1.2      |           | nC    |
| Q <sub>gd</sub>             | Gate Drain Charge                     |                                                                                            |      | 2.1      |           | nC    |
| t <sub>D(on)</sub>          | Turn-On DelayTime                     | V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-10V, R <sub>L</sub> =5Ω,<br>R <sub>GEN</sub> =6Ω |      | 7.2      |           | ns    |
| t <sub>r</sub>              | Turn-On Rise Time                     |                                                                                            |      | 36       |           | ns    |
| t <sub>D(off)</sub>         | Turn-Off DelayTime                    |                                                                                            |      | 53       |           | ns    |
| t <sub>f</sub>              | Turn-Off Fall Time                    |                                                                                            |      | 56       |           | ns    |
| t <sub>rr</sub>             | Body Diode Reverse Recovery Time      | I <sub>F</sub> =-2A, dI/dt=100A/μs                                                         |      | 37       | 49        | ns    |
| Q <sub>rr</sub>             | Body Diode Reverse Recovery Charge    | I <sub>F</sub> =-2A, dI/dt=100A/μs                                                         |      | 27       |           | nC    |

A: The value of R<sub>θJA</sub> is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with T<sub>A</sub>=25° C. The value in any a given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The R<sub>θJA</sub> is the sum of the thermal impedance from junction to lead R<sub>θJL</sub> and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using 300 μs pulse width, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with T<sub>A</sub>=25° C. The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

# TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

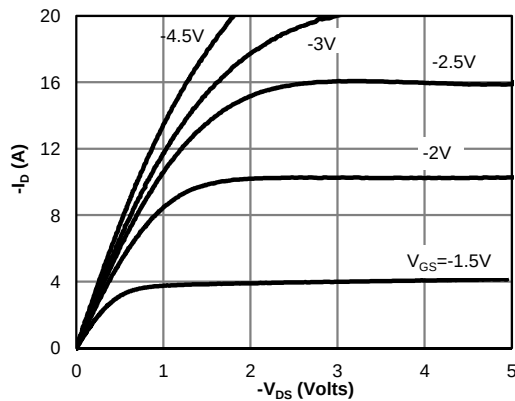


Fig 1: On-Region Characteristics (Note E)

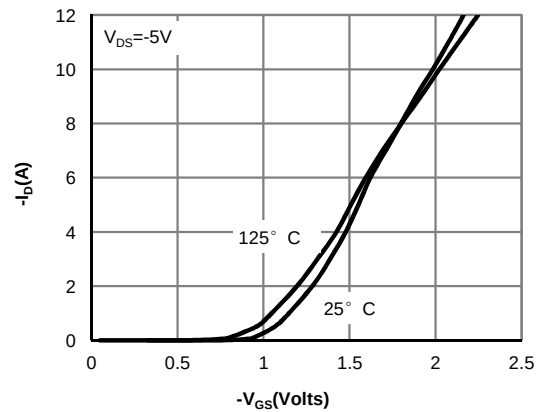


Figure 2: Transfer Characteristics (Note E)

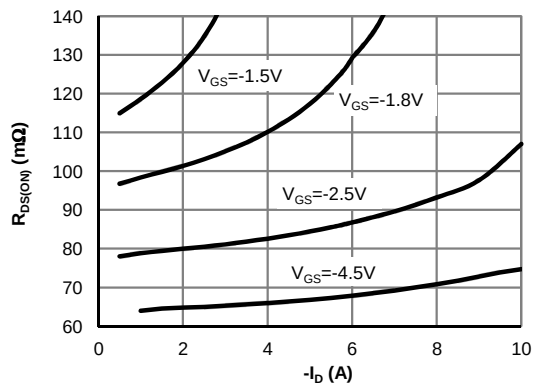


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

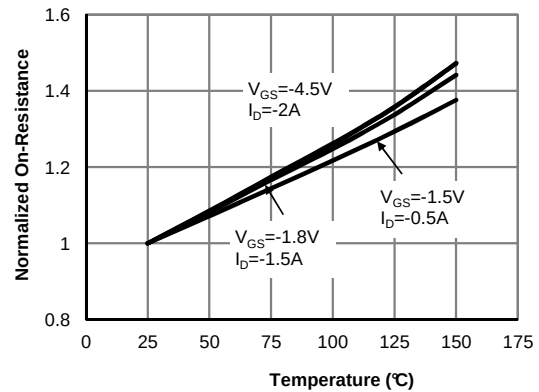


Figure 4: On-Resistance vs. Junction Temperature (Note E)

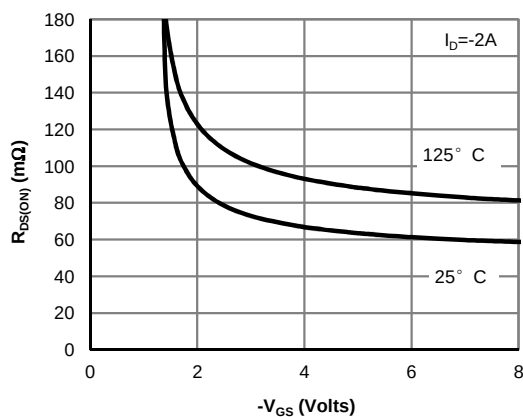


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

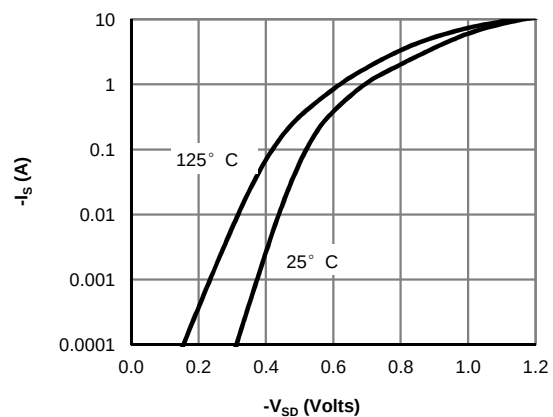


Figure 6: Body-Diode Characteristics (Note E)

# TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

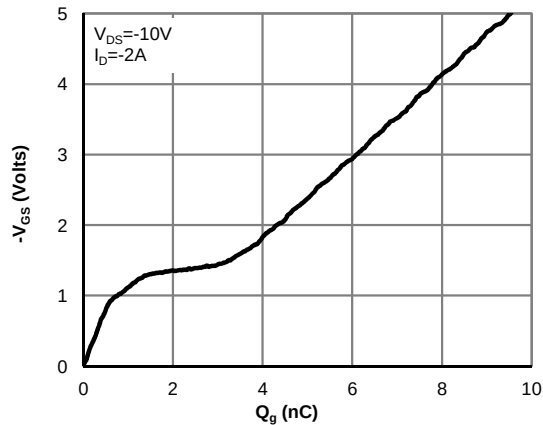


Figure 7: Gate-Charge Characteristics

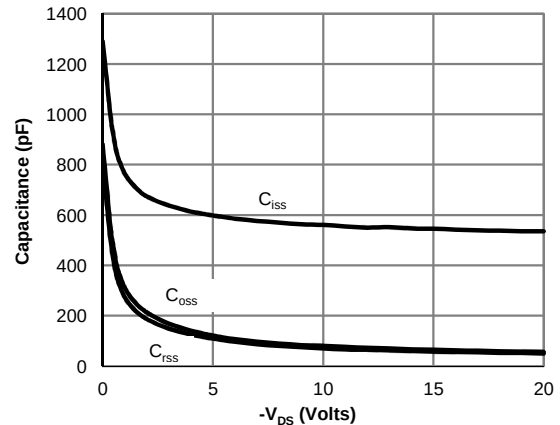


Figure 8: Capacitance Characteristics

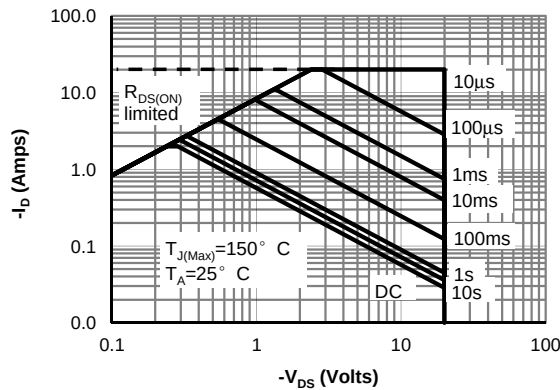


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

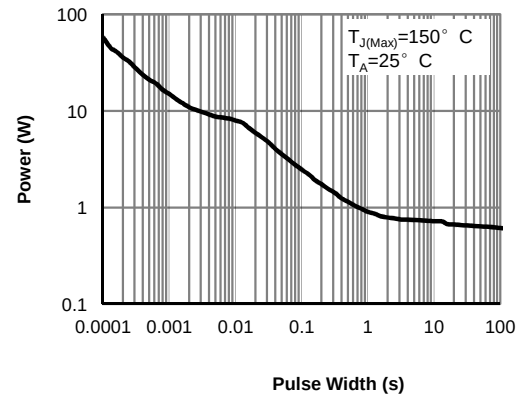


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

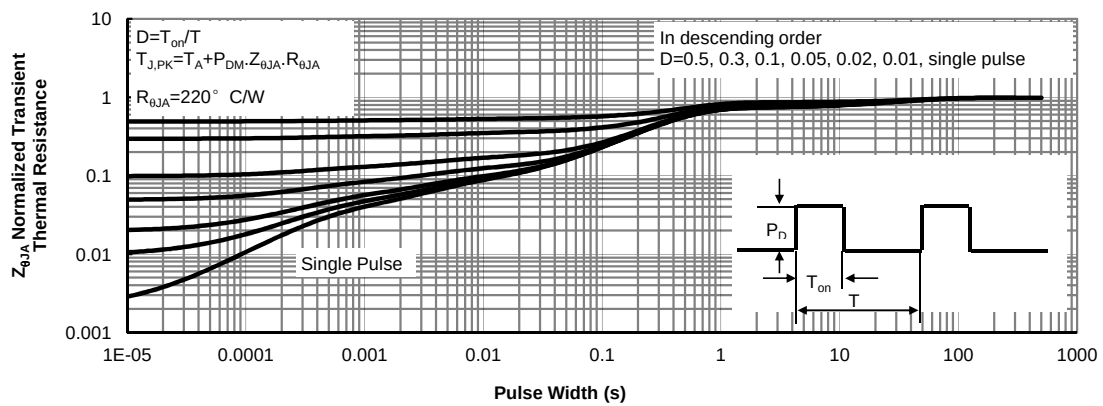


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)