



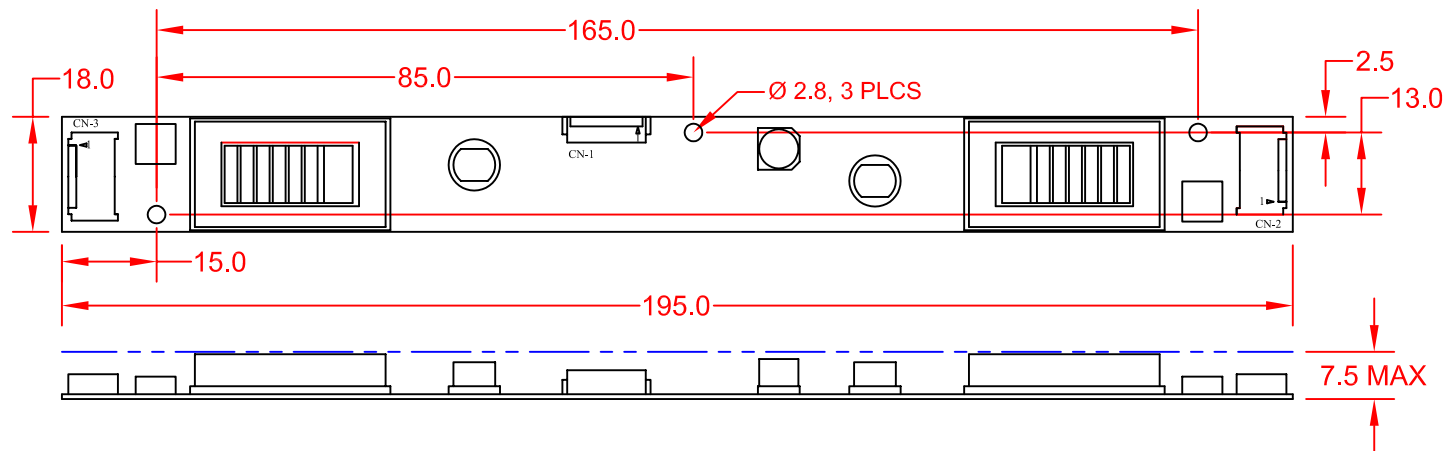

REV	DESCRIPTION/ECO NO.	DATE
	ENGR. RELEASED TO CAD	8/5/04
A	PIN # CORR. ON CONTROLS FUNCTION	8/5/04
B	CHNG ELEC. SPECS, CHAR'S, RATINGS	7/7/06

WIRING DIAGRAM:

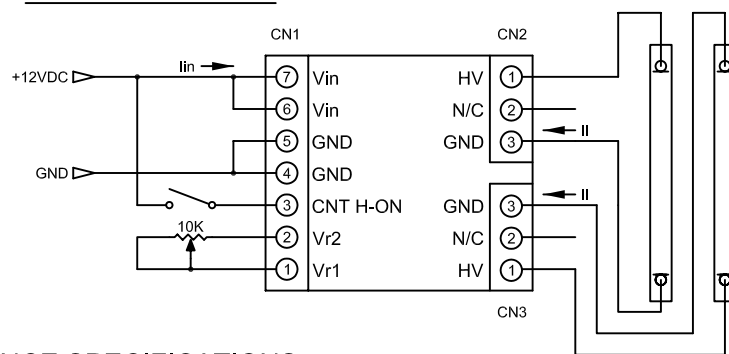

PERFORMANCE SPECIFICATIONS:

DESCRIPTION	SYM	MIN	TYP	MAX	UNITS
INPUT VOLTAGE	V _{IN}	10.8	12.0	13.2	V DC
INPUT CURRENT	I _{IN}	---	1100	---	mA DC
OUTPUT VOLTAGE	V _L	---	1800	---	V RMS
OUTPUT CURRENT	I _L	5.0	6.0	7.0	mA RMS
OSC. FREQUENCY	F ₀	---	40.0	---	K HZ

TESTED WITH 2 EACH 3MM X 330MM LAMPS, AT 25°C, V_{IN}= 12.0V ± 0.1V.

OPERATING CHARACTERISTICS:

INPUT VOLTAGE RANGE: 10.8 Vdc to 13.2 Vdc
 MAX INPUT POWER: 15.0 WATTS
 OUTPUT DIMMING RANGE (R MODE): 40% TO 100%
 OUTPUT DIMMING RANGE (V MODE): N/A
 OPERATING TEMPERATURE RANGE: 0°C TO 60°C
 STORAGE TEMPERATURE RANGE: -20°C TO 70°C

ABSOLUTE MAXIMUM RATINGS:

MAXIMUM INPUT VOLTAGE: 16.0 Vdc
 MAXIMUM RELATIVE HUMIDITY: 95%

MATING CONNECTORS:


REF.	DESCRIPTION	PART NUMBER	MFG.
CN-1	INPUT HOUSING TERMINAL	51021-0700 50079-8000	MOLEX
CN-1	INPUT HARNESS	BXC-10630	JKL
CN-2 & CN-3	OUTPUT 1 & 2 HOUSING TERMINAL	BHR-03VS-1 SBH-001T-P0.5	JST
CN-2 & CN-3	OUTPUT 1 & 2 HARNESS	BXC-10643 (2 required)	JKL

CONTROL FUNCTIONS:

CNT (INPUT PIN 3) IS USED AS AN INHIBIT FUNCTION, "GND" OR "OPEN" EQUALS OFF. "+V" EQUALS ON.

R MODE DIMMING: V_{R1} AND V_{R2} (INPUT PINS 1 AND 2) ARE USED TO PROVIDE, THE DIMMING FUNCTION, "0" OHMS EQUALS 100% LIGHT OUTPUT, "10K" OHMS EQUALS 40% LIGHT OUTPUT.

NOTE: THE SWITCH AND POTENTIOMETER SHOWN ON THE WIRING DIAGRAM ARE NOT A PART OF THE BXA-12610-7M INVERTER. THESE PARTS ARE AVAILABLE FROM MOST ELECTRONIC PARTS DISTRIBUTORS.

METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/- 0		JKL COMPONENTS CORPORATION					
		TITLE12V DC INPUT, DUAL OUTPUT, DIMMING CCFL INVERTER							
DRAWN BY L. WENGSTROM		APPV'D BY LARRY R.	DATE 7/7/06	SIZE A	FSCM NO. 55335	DRAWING NO. BXA-12610-7M			
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED				SCALE NONE	RELEASED DATE 8/5/04	REVISION DATE 7/7/06	REV. NO. B	SHEET 1 OF 1	