
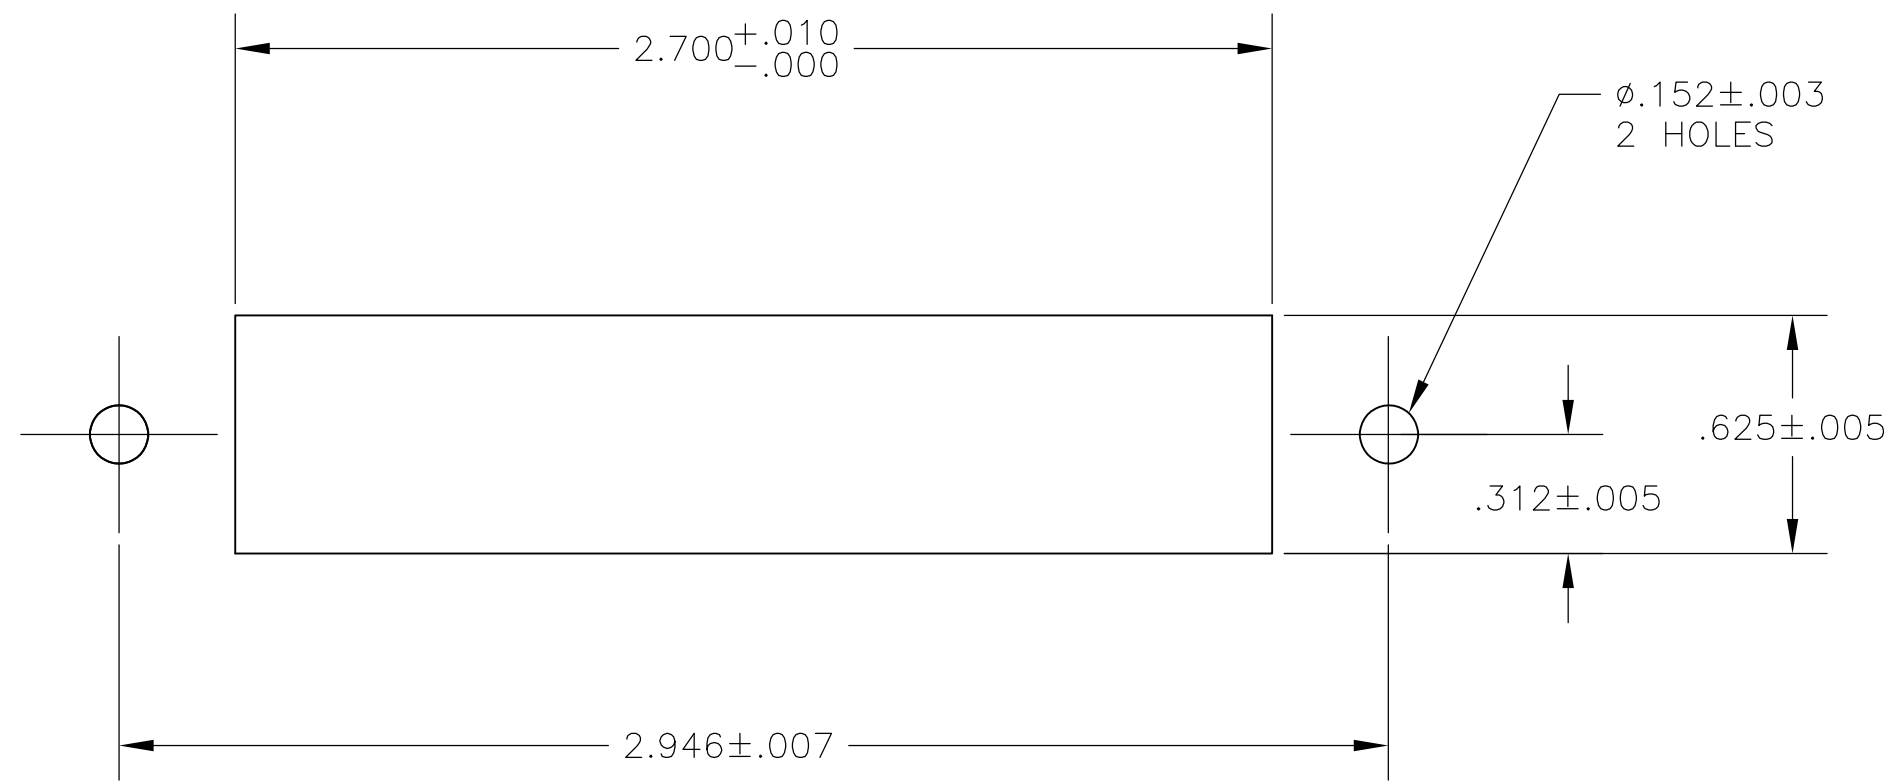
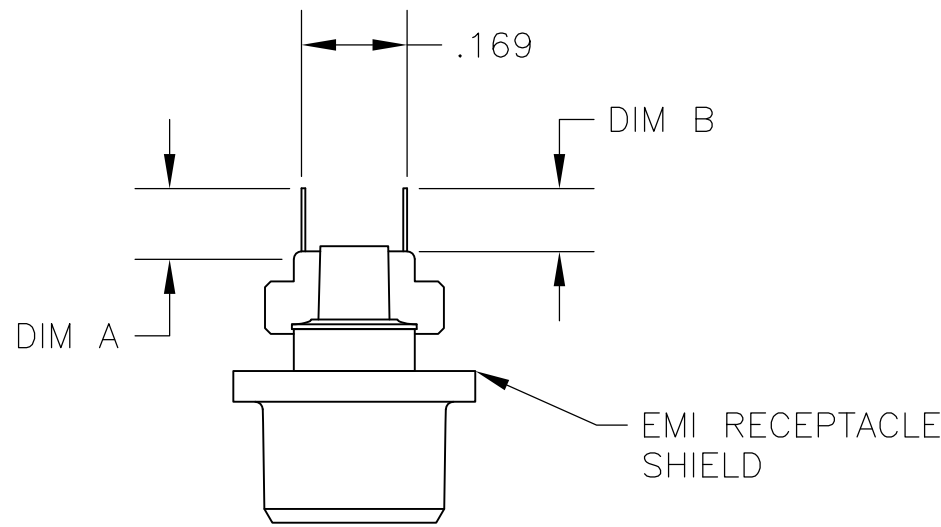
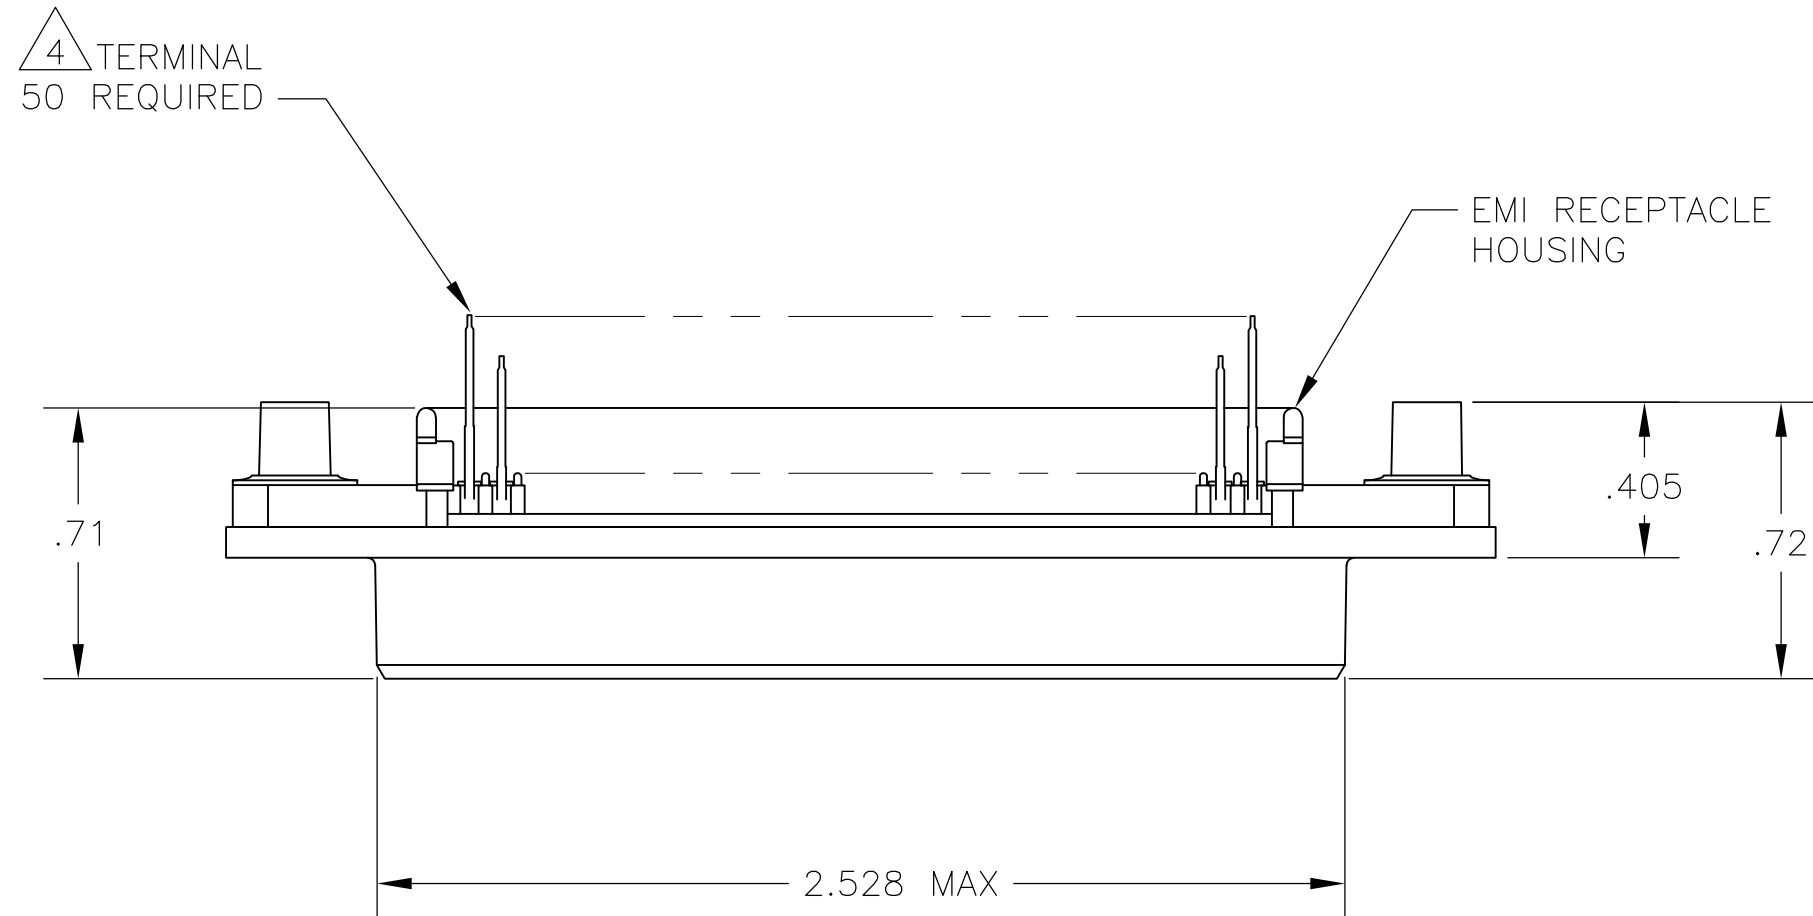


LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			B	REVISED PER ECO-08-007327			22JUL08	BM	WM
			B1	REVISED PER ECO-10-000444			19JAN10	KK	HMR

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
3. MATERIAL:
HOUSING - THERMOPLASTIC, BLACK
TERMINAL - PHOS BRONZE PLATED WITH EITHER .000030 MINIMUM GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, .000030 MINIMUM TOTAL ON MATING SURFACE. .000120 MINIMUM TIN PLATE ON TAILS OVER .000050 MINIMUM NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
STUD RECEIVER - STAINLESS STEEL.
SHEILD - NICKEL PLATED DIE CASTING.
4. CENTER-TO-CENTER SPACING OF TERMINALS IS .085.
5. HOLES TO BE TAPPED AFTER PLATING.
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

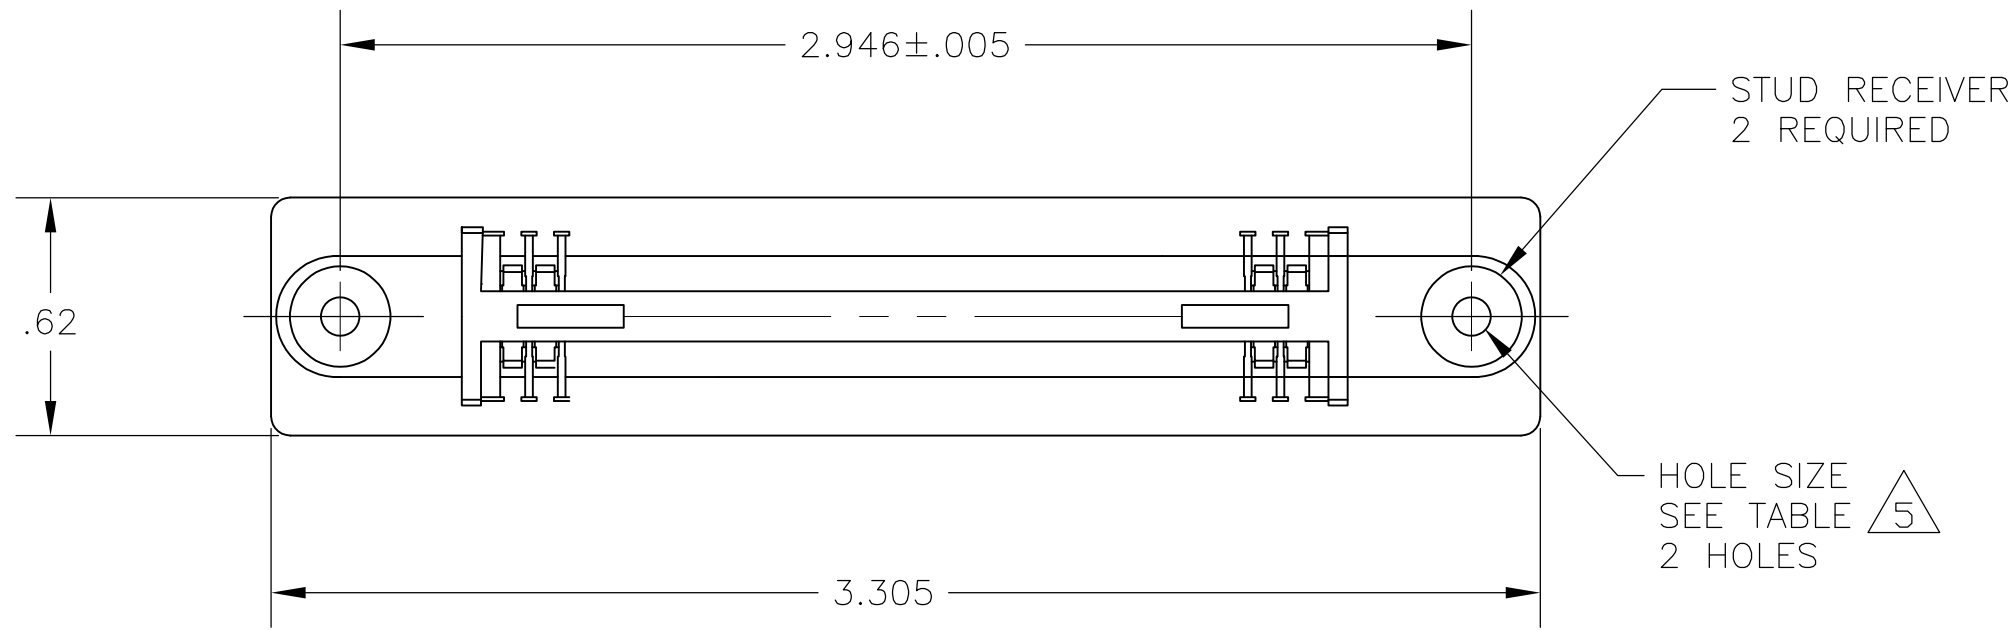

6 OBSOLETE	4-40	.185	.200	5554217-4
	UNC-2B	.135	.150	5554217-3
HOLE SIZE		DIM B	DIM A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA	17AUG05	Tyco Electronics Corporation Harriaburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK W. MILLHIMES	17AUG05	NAME RCPT ASSY, 50 POSN, VERT MTG, SHLD, CHAMP	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY	17AUG05	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE	
1 PLC ± -		WEIGHT		CAGE CODE	
2 PLC ± -		CUSTOMER DRAWING		DRAWING NO	
3 PLC ± -		SCALE		RESTRICTED TO	
4 PLC ± -		SHEET		REV	
ANGLES ± -		1		B1	
FINISH		2:1			
MATERIAL		A1			
3		00779			
		5554217			