

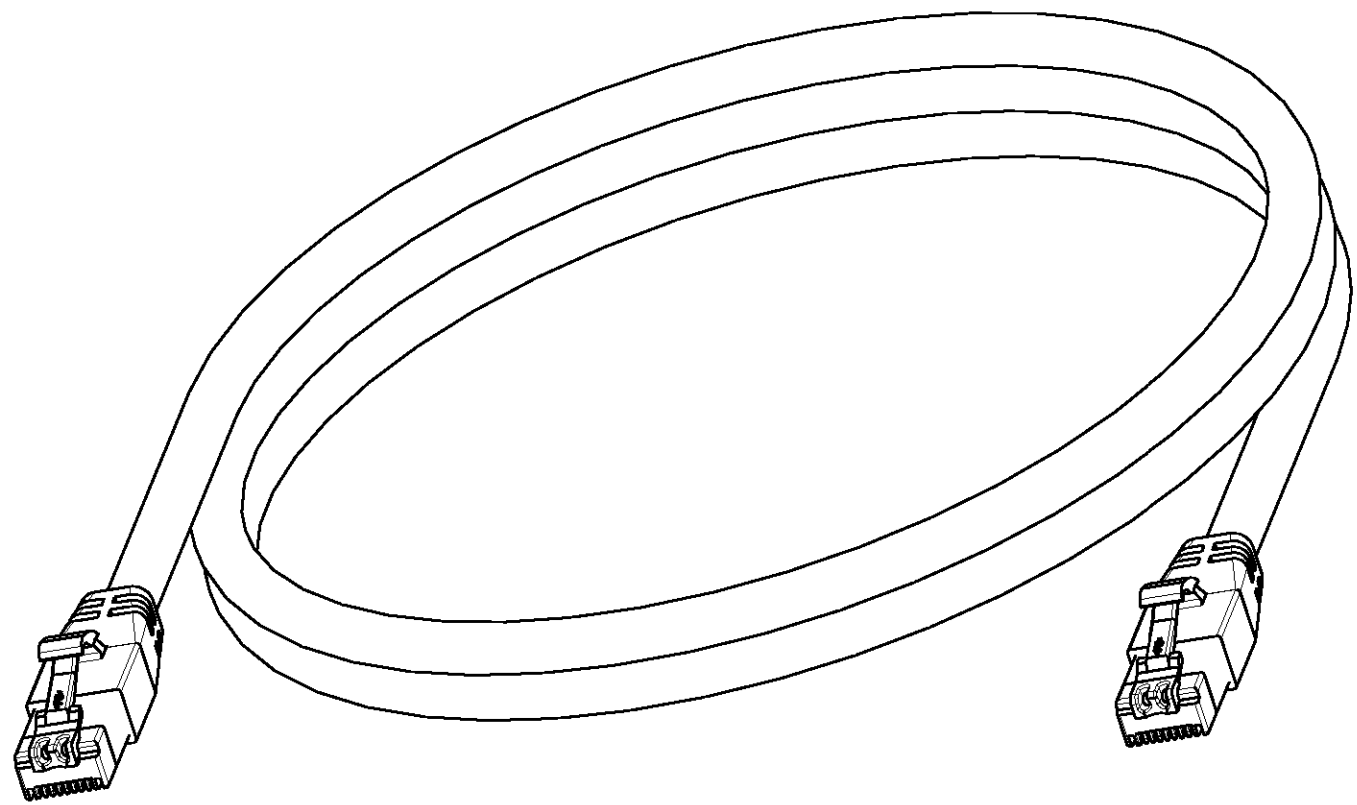


LOC	DIST	REVISIONS						
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			E	REV: EC 0B60-0118-04	28DEC2004	GG	MD	

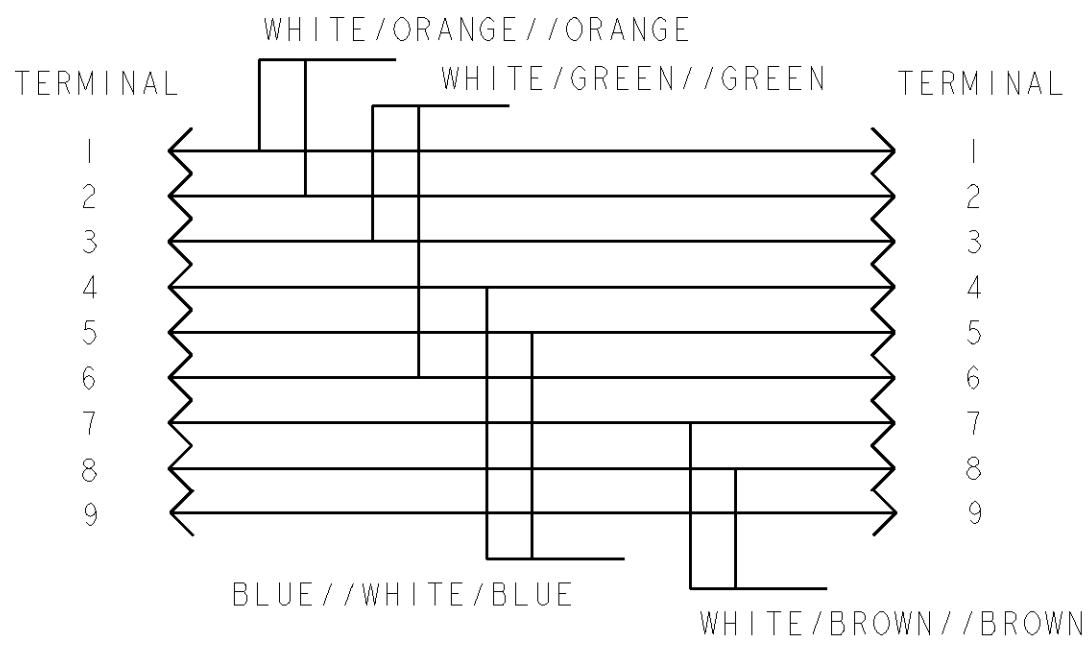

- 1
- CABLE ASSEMBLY SHALL BE WIRED PER WIRING DIAGRAM.
- 2
- FINAL ASSEMBLY SHALL BE 568B COMPLIANT.
- 3
- PROBE PINS ARE CONNECTED BY 9TH WIRE IN CABLE.
- 4
- DIMENSIONS ARE MAXIMUM.
- 5
- CABLE OUTSIDE DIAMETER IS 6.7 MM NOMINAL AND FOR REFERENCE ONLY.
- 6
- PROTECTIVE CAPS TO BE REMOVED PRIOR TO MATING WITH MODULAR JACK, SHIPPED WITH CAPS INSTALLED.

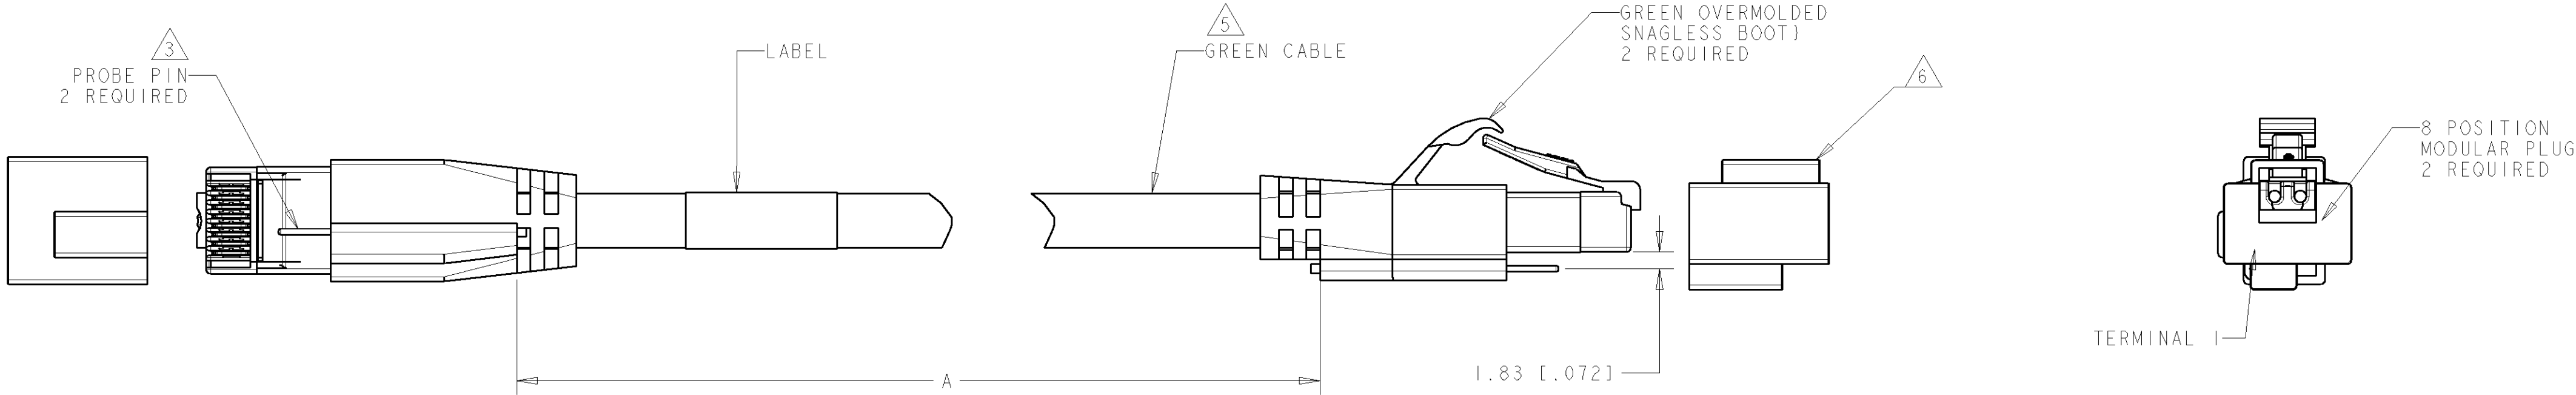

1 WIRING DIAGRAM
568B

25	7874.0 [310.00]	2-1435860-5
16	5130.8 [202.00]	1-1435860-6
14	4521.2 [178.00]	1-1435860-4
10	3251.2 [128.00]	1-1435860-0
9	2895.6 [114.00]	1435860-9
7	2286.0 [90.00]	1435860-7
5	1676.4 [66.00]	1435860-5
4	1371.6 [54.00]	1435860-4
3	1066.8 [42.00]	1435860-3
2	762.0 [30.00]	1435860-2
FEET, REF		PART NO.

DIMENSIONS: MM [INCH]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH -	4	DRAWING NO. 00779	REV E
MATERIAL -		FINISH -		CUSTOMER DRAWING	
DWN L. HALL 05FEB04		CHK M. DELPHIAS 06FEB04		APVD M. DELPHIAS 06FEB04	
PRODUCT SPEC		APPLICATION SPEC		WEIGHT -	
SIZE A		CAGE CODE 00779		DRAWING NO. 1435860	
RESTRICTED TO		SCALE NTS		SHEET 1 OF 1	