

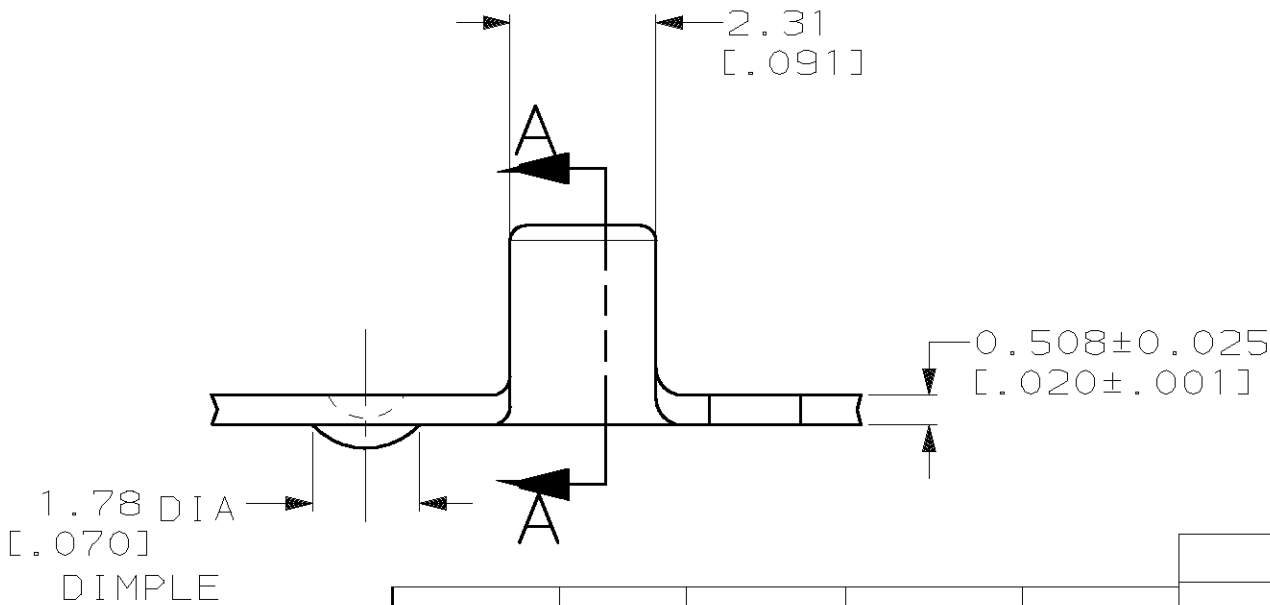


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				B	ADDED -2 PER 0G3A-0233-99	250CT99	JR/EH

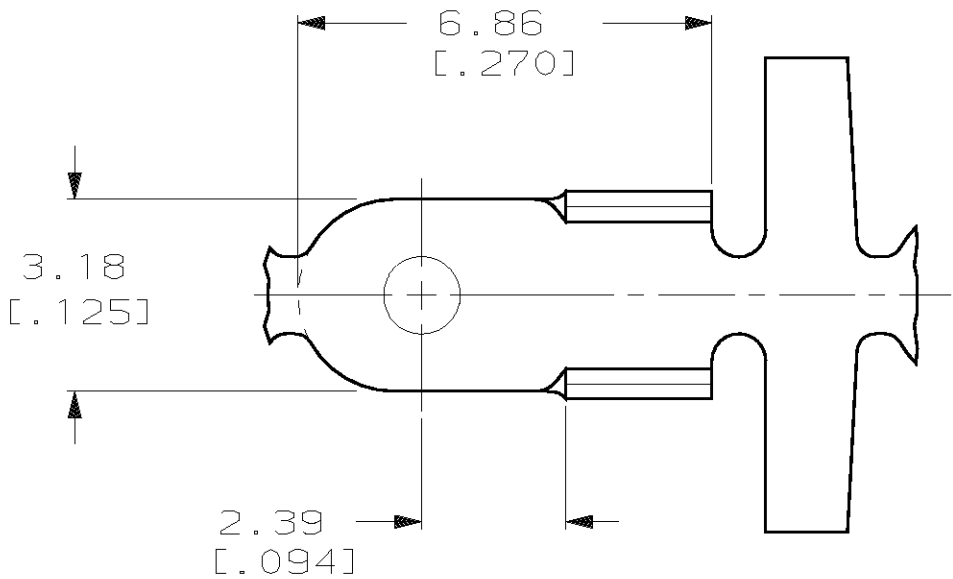

- 1 CONTINUOUS STRIP ON REEL.
- 2 WIRE SIZE IS [#20-#16] AWG.
- 3 .00381 [.00150] MIN NICKEL
- 4 PRELIMINARY - NOT FOR PRODUCTION

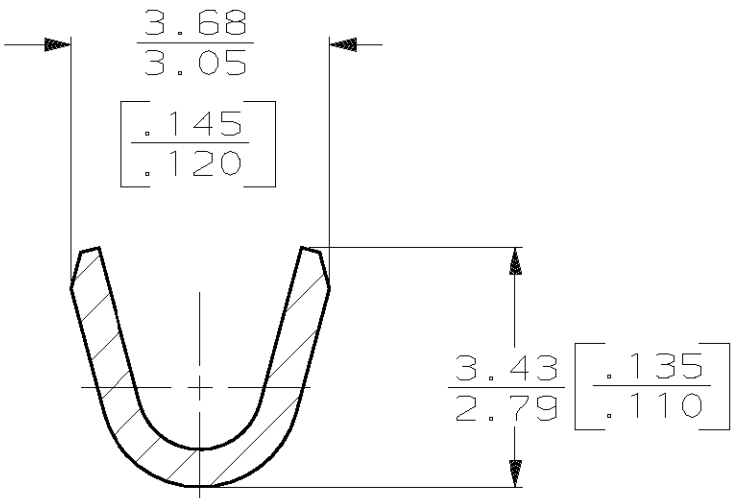

SECTION A-A
SCALE 10:1

3.96 [.156]	F	2.79 [.110]	1.68 [.066] 1.52 [.060] 1.42 [.056]	1.3mm ² [16] 0.8mm ² [18] 0.5mm ² [20]
STRIP LENGTH ±0.38 [±.015]	TYPE	WIDTH	±0.051 [±.002] HEIGHT	WIRE
WIRE BARREL CRIMP				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

-	1/4H NICKEL PER UNSN02200 (NICKEL 200)	△ 63701-2
△ 3	T3 STEEL	63701-1
FINISH	MATERIAL	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± -		
MATERIAL		DR 3/24/93 P FORTNEY
T3 STEEL		CHK 3/24/93 JR RUTH
FINISH		APPD 3/24/93 D SCHWENK
SEE TABLE		APPD 3/24/93 R WEAVILL
		PRODUCT SPEC -
		APPLICATION SPEC -
		WEIGHT -
AMP Incorporated Harrisburg, PA 17105-3608		
WELD TAB		
SIZE B	CAGE CODE 00779	DRAWING NO C-63701
SCALE 8:1	SHEET 1 OF 1	