



[About Us](#)
[Products](#)
[Services](#)
[Support](#)
[Projects](#)
[Web Shop](#)

Products

[» Board Comparison Chart](#)
[» Developer's Kits](#)
[» OEM Boards](#)
[↓ QuickStart Boards](#)
[» LPC1343](#)
[» LPC2106 RS232](#)
[» LPC2129 CAN](#)
[» LPC2148 USB](#)
[» Prototype board](#)
[» Christmas Tree](#)
[» Color LCD Bluetooth Game](#)
[» Education Boards](#)
[» LPCXpresso & mbed](#)
[» Displays](#)
[» Tools](#)
[» Accessories](#)

LPC2148 USB QuickStart Board

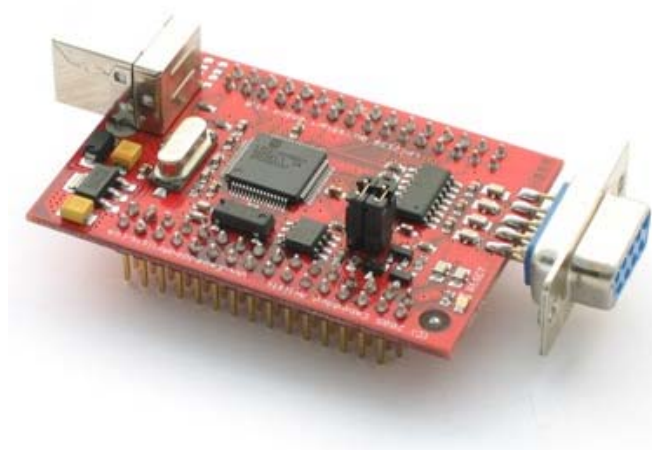

Price Information

EUR

Art.no: **EA-QSB-010** [Buy](#)

Currently out-of-stock

Expected delivery date:
2011-08-15

Price Information

EUR

With a prototype board

Art.no: **EA-QSB-110** [Buy](#)

Currently out-of-stock

Expected delivery date:
2011-08-15

[Overview](#)
[Specification](#)
[MCU](#)
[Related Products](#)
[Resources](#)
[FAQ](#)

LPC2148 USB QuickStart Board

<i>Processor</i>	<u>NXP's ARM7TDMI LPC2148</u> with integrated USB 2.0 device.
<i>Program Flash</i>	512 KB
<i>Data Memory</i>	32+8 KB
<i>Clock Crystals</i>	12.0000 MHz crystal for maximum execution speed (5x PLL = 60 Mhz CPU clock) 32.768kHz RTC crystal
<i>Dimensions</i>	59 x 39.5 mm
<i>Power</i>	On-board low-dropout voltage and reset generation - Generates +3.3V from a +5V supply +3.3V available for external circuits, up to 300 mA - Power supply: 5 VDC - or via USB connector (very practical since no external power supply is needed)
<i>Connectors</i>	- Dual 2x16 pins I/O connectors - Signals available on expansion connector - RS232, DSUB-9 (ESD/EMI protected) - USB connector (USB 2.0 Device)
<i>Other</i>	2 Kbit I2C E2PROM for storing non-volatile parameters - Simple and automatic program download (ISP) via serial channel. Circuit that automatically controls the bootloader from RS232 channel - Four layer PCB (FR-4 material) for best noise immunity - Both UART #0 and #1 connected