



Series X55X Universal Zero-Insertion-Force DIP Test Socket

FEATURES


- Aries Universal Test Socket accepts devices on 0.300 to 0.600 [7.62 to 15.24] centers.
- All pin count sockets go into PCB with either 0.300 or 0.600 [7.62 to 15.24] centers.
- Contacts are normally closed to eliminate dependence on plastic to sustain contact.
- Socket handle can be configured with closed contacts (on) when in the UP or DOWN position, and can be mounted on either the right or left side.
- Sockets can be soldered into PCBs or plugged into any socket. Socket fits into Aries' or any competitive test socket receptacle.

GENERAL SPECIFICATIONS

- SOCKET BODY: black UL 94V-0 glass-filled Polyphenylene Sulfide (PPS)
- HANDLE: Stainless Steel
- HANDLE KNOB: Brass 360, 1/2-hard
- CONTACTS: BeCu 172 per QQ-C-533 or BeNi 360 1/2-hard
- CONTACT PLATING: 50μ [1.27μ] min. Ni under-plate per QQ-N-290, over-plated with either 200μ [5.08μ] min. matte Sn per ASTM B545-97 or 200μ [5.08μ] 90/10 Sn/Pb per MIL-T-10727 or 10μ [0.254μ] min. Au per MIL-G-45204
- BeNi CONTACT PLATING: 50μ [1.27μ] min. NiB
- CONTACT CURRENT RATING: 1 amp
- INSULATION RESISTANCE: 1000 mΩ min.
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
- LIFE CYCLE: 25,000 to 50,000 cycles
- OPERATING TEMPERATURE: -67°F [-55°C] min.; 221°F [105°C] max. for Sn plating; 302°F [150°C] for Au plating; 392°F [200°C] for NiB plating
- RETENTION FORCE (closed): 55g/pin based on a 0.020 [0.51] dia. test lead
- ACCEPTS LEADS: 0.015-0.045 [0.38-1.14] wide, 0.110-0.280 [2.79-7.11] long

MOUNTING CONSIDERATIONS

- See Socket Footprint below

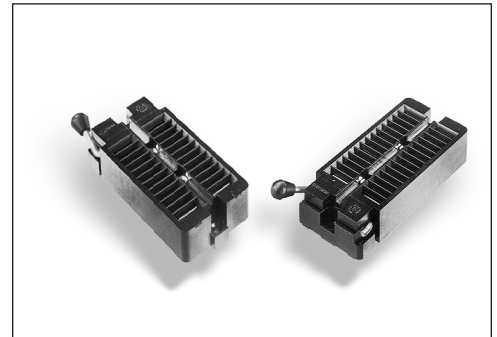


CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

ORDERING INFORMATION

XX-X55X-1 X

- Pins
 - 24, 28, 32, 36,
 - 40, 42, 44, 48
 - Row-to-Row Spacing (btm)
 - 3 = 0.300 [7.62]
 - 6 = 0.600 [15.24]
 - Plating
 - 0 = Sn over Ni
 - OTL = Sn/Pb over Ni
 - 1 = Au over Ni
 - 6 = NiB BeNi Contact Only
 - Solder Pin Tail
 - Handle Options
 - 1 = Left, up is on
 - 2 = Right, up is on
 - 3 = Left, down is on
 - 4 = Right, down is on (std)
- NOTE:** "on" = closed contacts

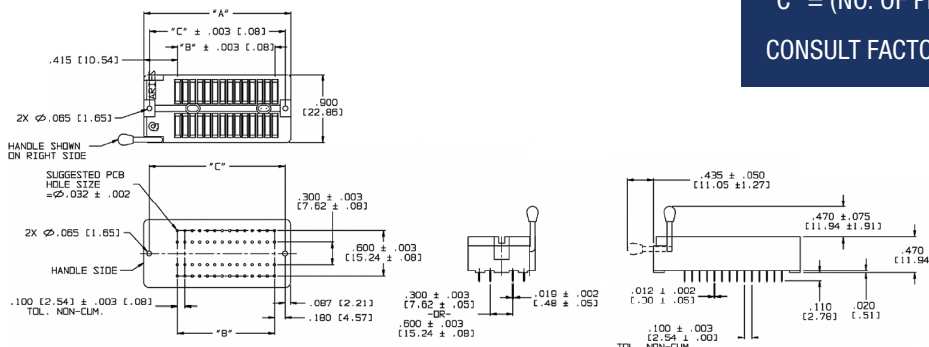

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

"A" = (NO. OF PINS PER ROW x 0.100 [2.54]) + 0.590 [14.99]

"B" = (NO. OF PINS PER ROW - 1) x 0.100 [2.54]

"C" = (NO. OF PINS PER ROW x 0.100 [2.54]) + 0.415 [10.54]

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS



ARIES
ELECTRONICS, INC.

Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



10001
Rev. AC

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aries:

[40-3553-16*](#) [40-6553-16*](#) [40-3553-10*](#) [40-6553-10*](#) [40-6553-11*](#) [40-3553-11*](#) [48-3553-10*](#) [48-6553-10*](#) [48-6553-16*](#) [48-3553-16*](#) [48-3553-11*](#) [48-6553-11*](#) [44-3553-11*](#) [44-6553-11*](#) [44-6553-10*](#) [44-3553-10*](#) [44-3553-16*](#) [44-6553-16*](#) [42-6553-10*](#) [42-3553-10*](#) [42-3553-16*](#) [42-6553-16*](#) [42-3553-11*](#) [24-6552-16*](#) [24-3552-16*](#) [24-6552-10*](#) [24-3552-10*](#) [24-3552-11*](#) [24-6552-11*](#) [28-6552-11*](#) [28-3552-11*](#) [28-6552-16*](#) [28-3552-16*](#) [44-3554-11*](#) [24-3553-11*](#) [24-3553-16*](#) [24-6553-16*](#) [24-3553-10*](#) [24-6553-10*](#) [28-6553-16*](#) [28-3553-16*](#) [28-6553-11*](#) [36-6551-16*](#) [36-3551-16*](#) [36-6551-10*](#) [36-3551-10*](#) [36-3551-11*](#) [36-6551-11*](#) [32-6551-11*](#) [32-3551-11*](#) [32-3551-16*](#) [32-6551-16*](#) [32-3551-10*](#) [32-6551-10*](#) [32-6553-16*](#) [32-3553-16*](#) [32-6553-10*](#) [32-3553-10*](#) [32-3553-11*](#) [32-6553-11*](#) [42-3552-11*](#) [42-6552-11*](#) [42-6552-16*](#) [42-3552-16*](#) [42-6552-10*](#) [42-3552-10*](#) [36-6553-11*](#) [36-3553-11*](#) [36-3553-10*](#) [36-6553-10*](#) [36-6553-16*](#) [36-3553-16*](#) [48-6552-11*](#) [48-3552-11*](#) [48-3552-16*](#) [48-6552-16*](#) [48-3552-10*](#) [48-6552-10*](#) [40-3552-11*](#) [40-6552-11*](#) [40-6552-10*](#) [40-3552-10*](#) [40-3552-16*](#) [40-6552-16*](#) [44-3552-10*](#) [44-6552-10*](#) [44-6552-16*](#) [44-3552-16*](#) [44-3552-11*](#) [44-6552-11*](#) [44-3551-16*](#) [44-6551-16*](#) [44-3551-10*](#) [44-6551-10*](#) [44-6551-11*](#) [44-3551-11*](#) [40-3551-11*](#) [40-6551-11*](#) [40-6551-16*](#) [40-3551-16*](#)