


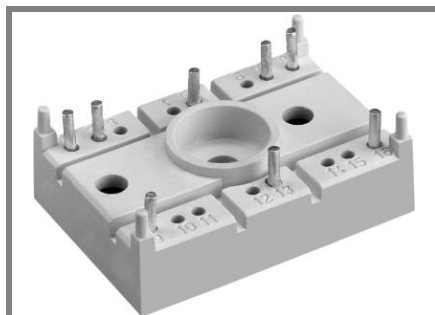

SEMITOP[®]2

IGBT Module

SK 20 GH 065

Target Data

Features


- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N channel, homogeneous Silicon structure (NPT-Non punchthrough IGBT)
- High short circuit capability
- Low tail current with low temperature dependence
- UL recognized, file no. E 63532

Typical Applications





- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS




Absolute Maximum Ratings		$T_s = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT			
V_{CES}		600	V
V_{GES}		± 20	V
I_C	$T_s = 25\text{ (80) °C}$;	24 (18)	A
I_{CM}	$t_p < 1\text{ ms}$; $T_s = 25\text{ (80) °C}$;	48 (36)	A
T_j		- 40 ... + 150	°C
Inverse/Freewheeling Diode			
I_F	$T_s = 25\text{ (80) °C}$;	25 (18)	A
$I_{FM} = -I_{CM}$	$t_p < 1\text{ ms}$; $T_s = 25\text{ (80) °C}$;	50 (36)	A
T_j		- 40 ... + 150	°C
T_{stg}		- 40 ... + 125	°C
T_{sol}	Terminals, 10 s	260	°C
V_{isol}	AC 50 Hz, r.m.s. 1 min. / 1 s	2500 / 3000	V

Characteristics		$T_s = 25\text{ °C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{CE(sat)}$	$I_C = 20\text{ A}$, $T_j = 25\text{ (125) °C}$		2 (2,2)	2,5	V
$V_{GE(th)}$	$V_{CE} = V_{GE}$; $I_C = 0,0005\text{ A}$	3	4	5	V
C_{res}	$V_{CE} = 0\text{ V}$; $V_{GE} = 0\text{ V}$; 1 MHz		1,2		nF
$R_{th(j-s)}$	per IGBT			1,7	K/W
	per module				K/W
$t_{d(on)}$	under following conditions: $V_{CC} = 300\text{ V}$, $V_{GE} = \pm 15\text{ V}$		21		ns
t_r	$I_C = 20\text{ A}$, $T_j = 125\text{ °C}$		28		ns
$t_{d(off)}$	$R_{Gon} = R_{Goff} = 30\text{ }\Omega$		170		ns
t_f			20		ns
$E_{on} + E_{off}$	Inductive load		1,1		mJ
Inverse/Freewheeling CAL diode					
$V_F = V_{EC}$	$I_F = 20\text{ A}$; $T_j = 25\text{ (125) °C}$		1,6 (1,6)		V
$V_{(TO)}$	$T_j = (125)\text{ °C}$		(0,9)		V
r_T	$T_j = (125)\text{ °C}$		30 (33)		mΩ
$R_{th(j-s)}$				1,7	K/W
I_{RRM}	under following conditions: $I_F = A$; $V_R = V$				A
Q_{rr}	$di_F/dt = A/\mu s$				μC
E_{off}	$V_{GE} = 0\text{ V}$; $T_j = 125\text{ °C}$				mJ
Mechanical data					
M1	mounting torque			2	Nm
w			19		g
Case	SEMITOP [®] 2		T 5		




GH

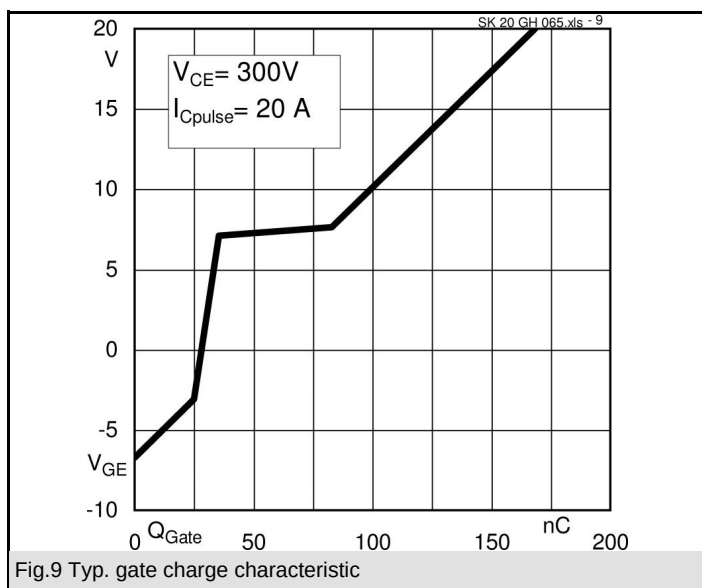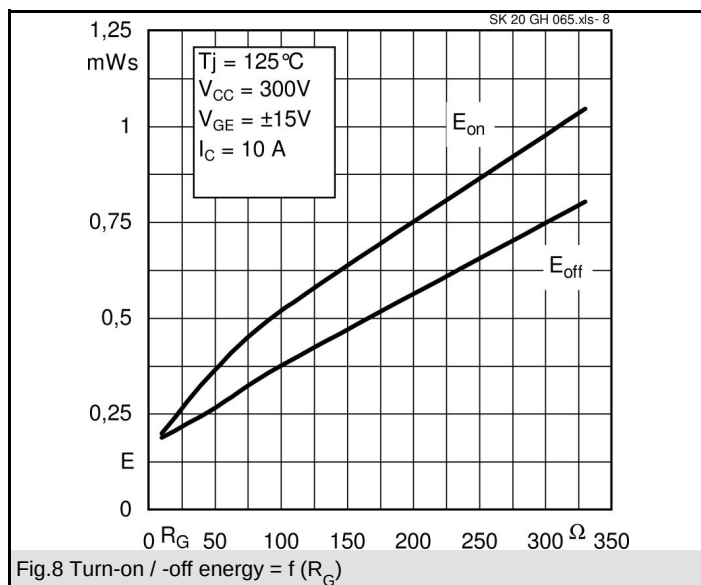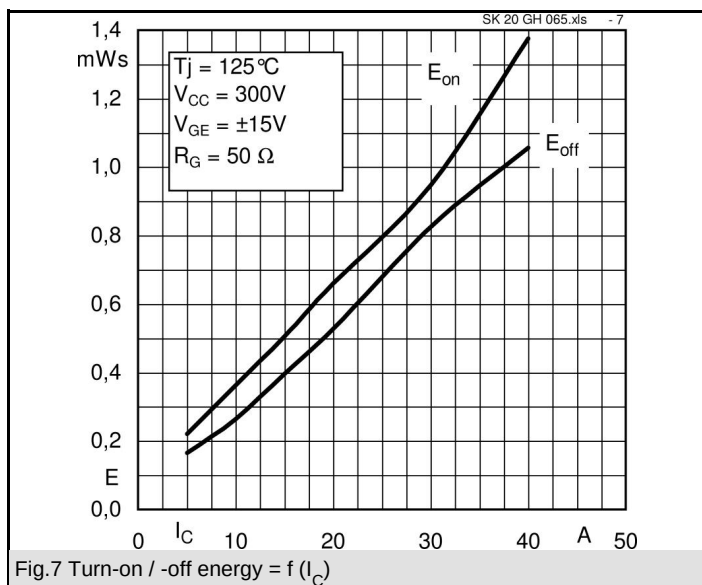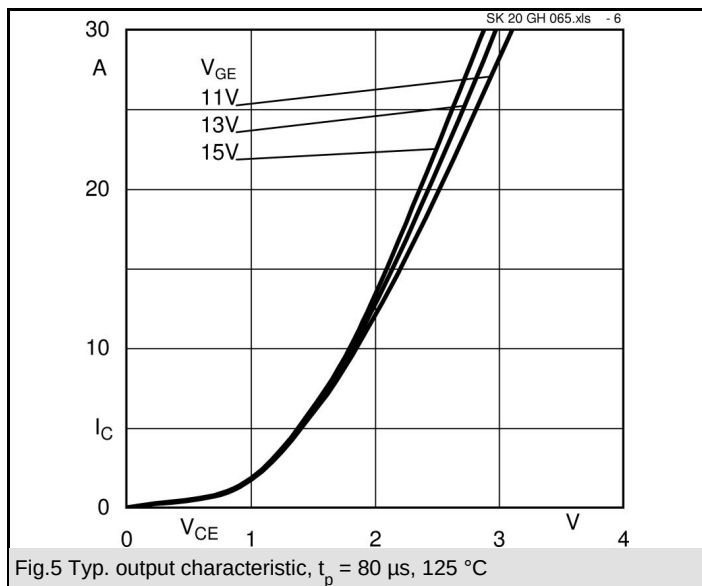

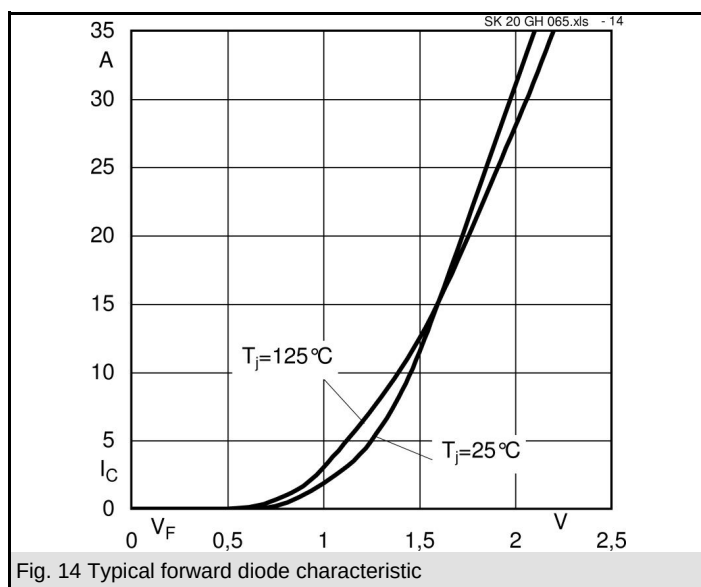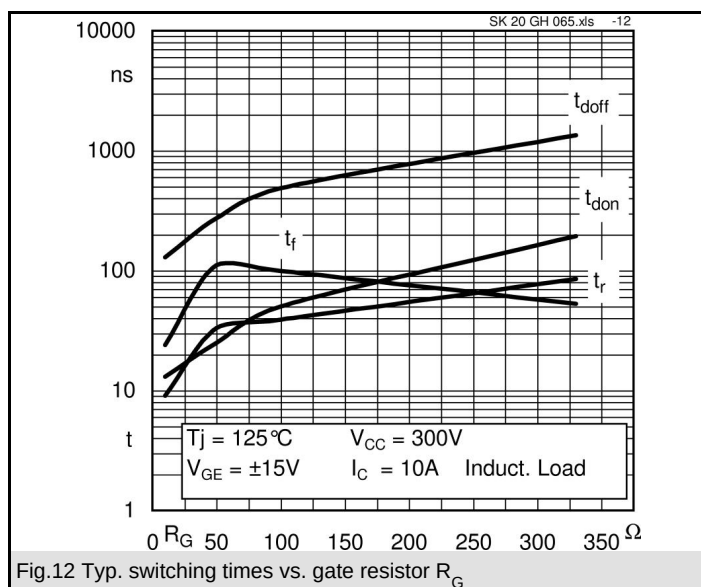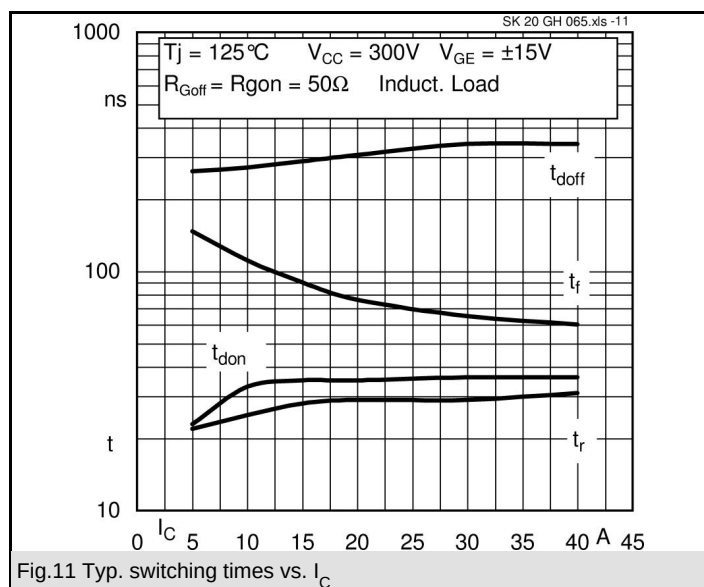


UL Recognized
File no. E 63532

Dimensions in mm

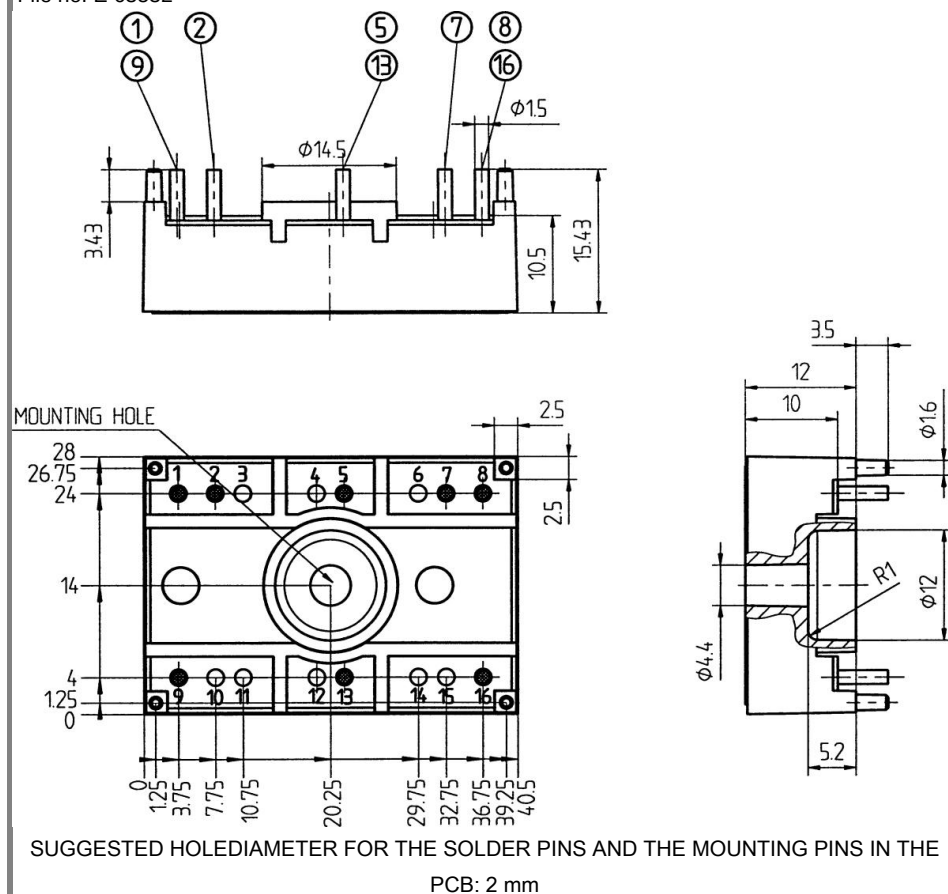

Case T5

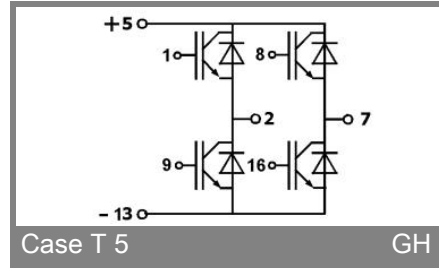

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.