

SIDE ROTARY

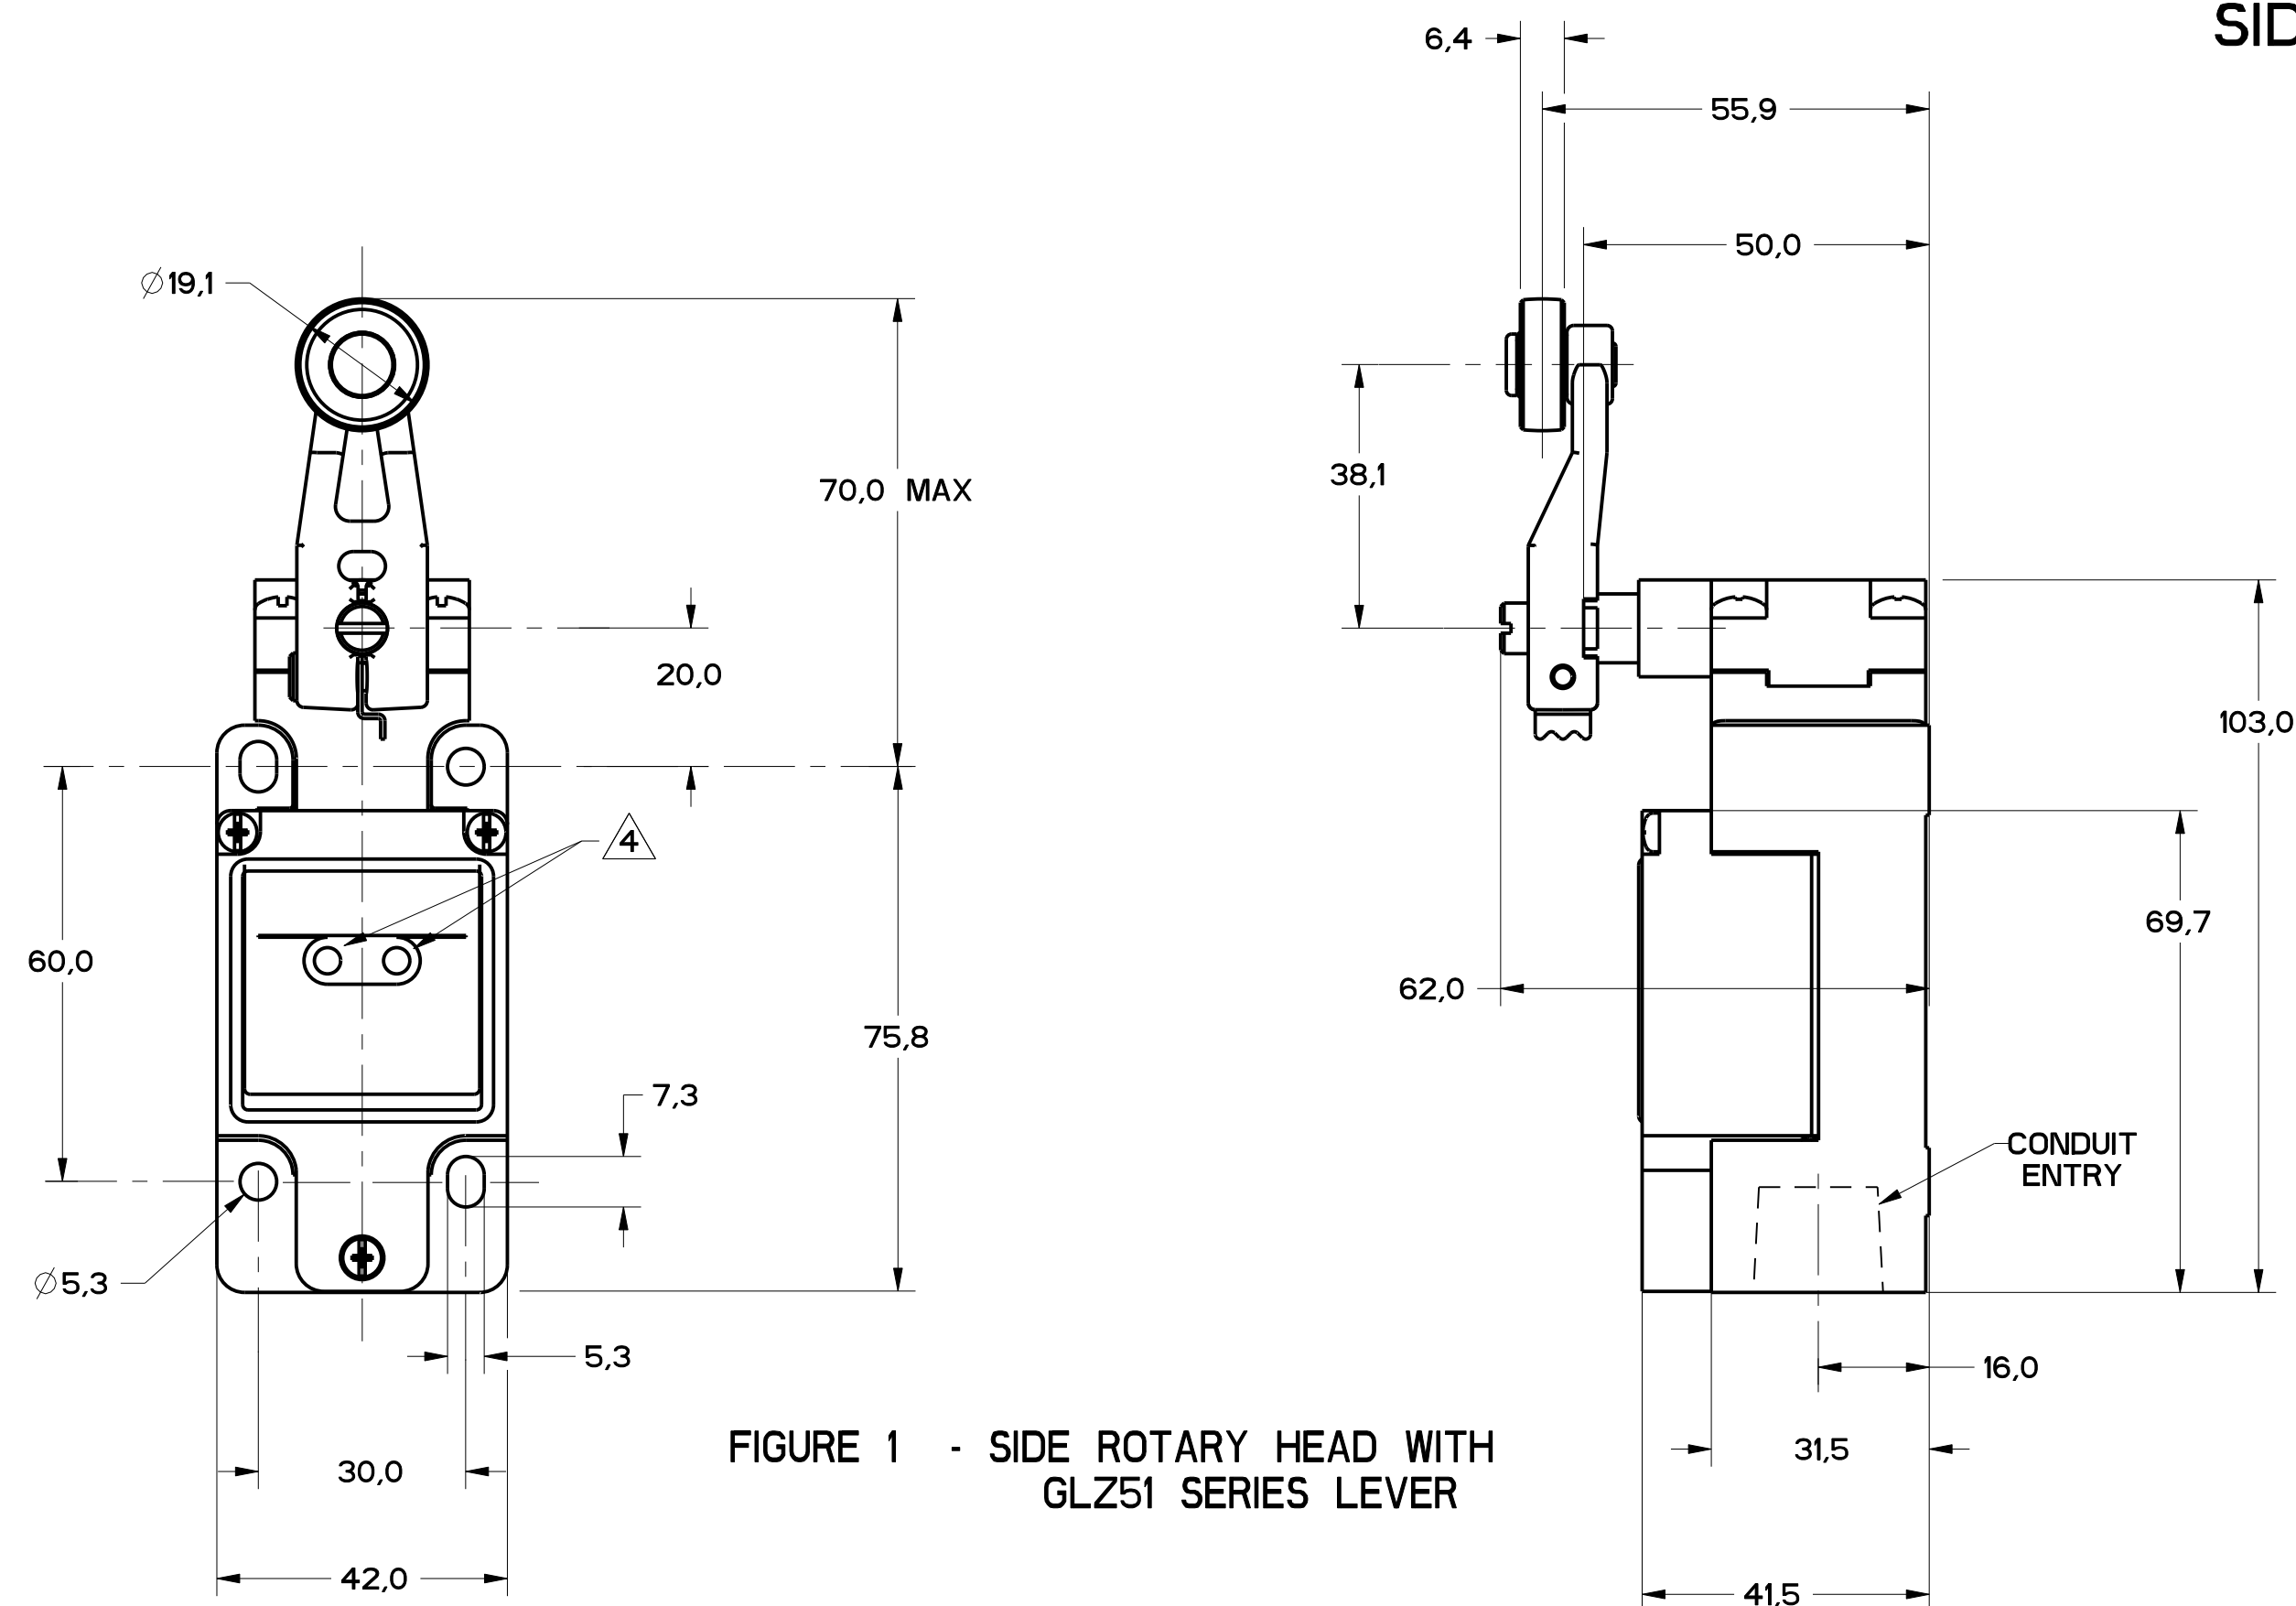


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

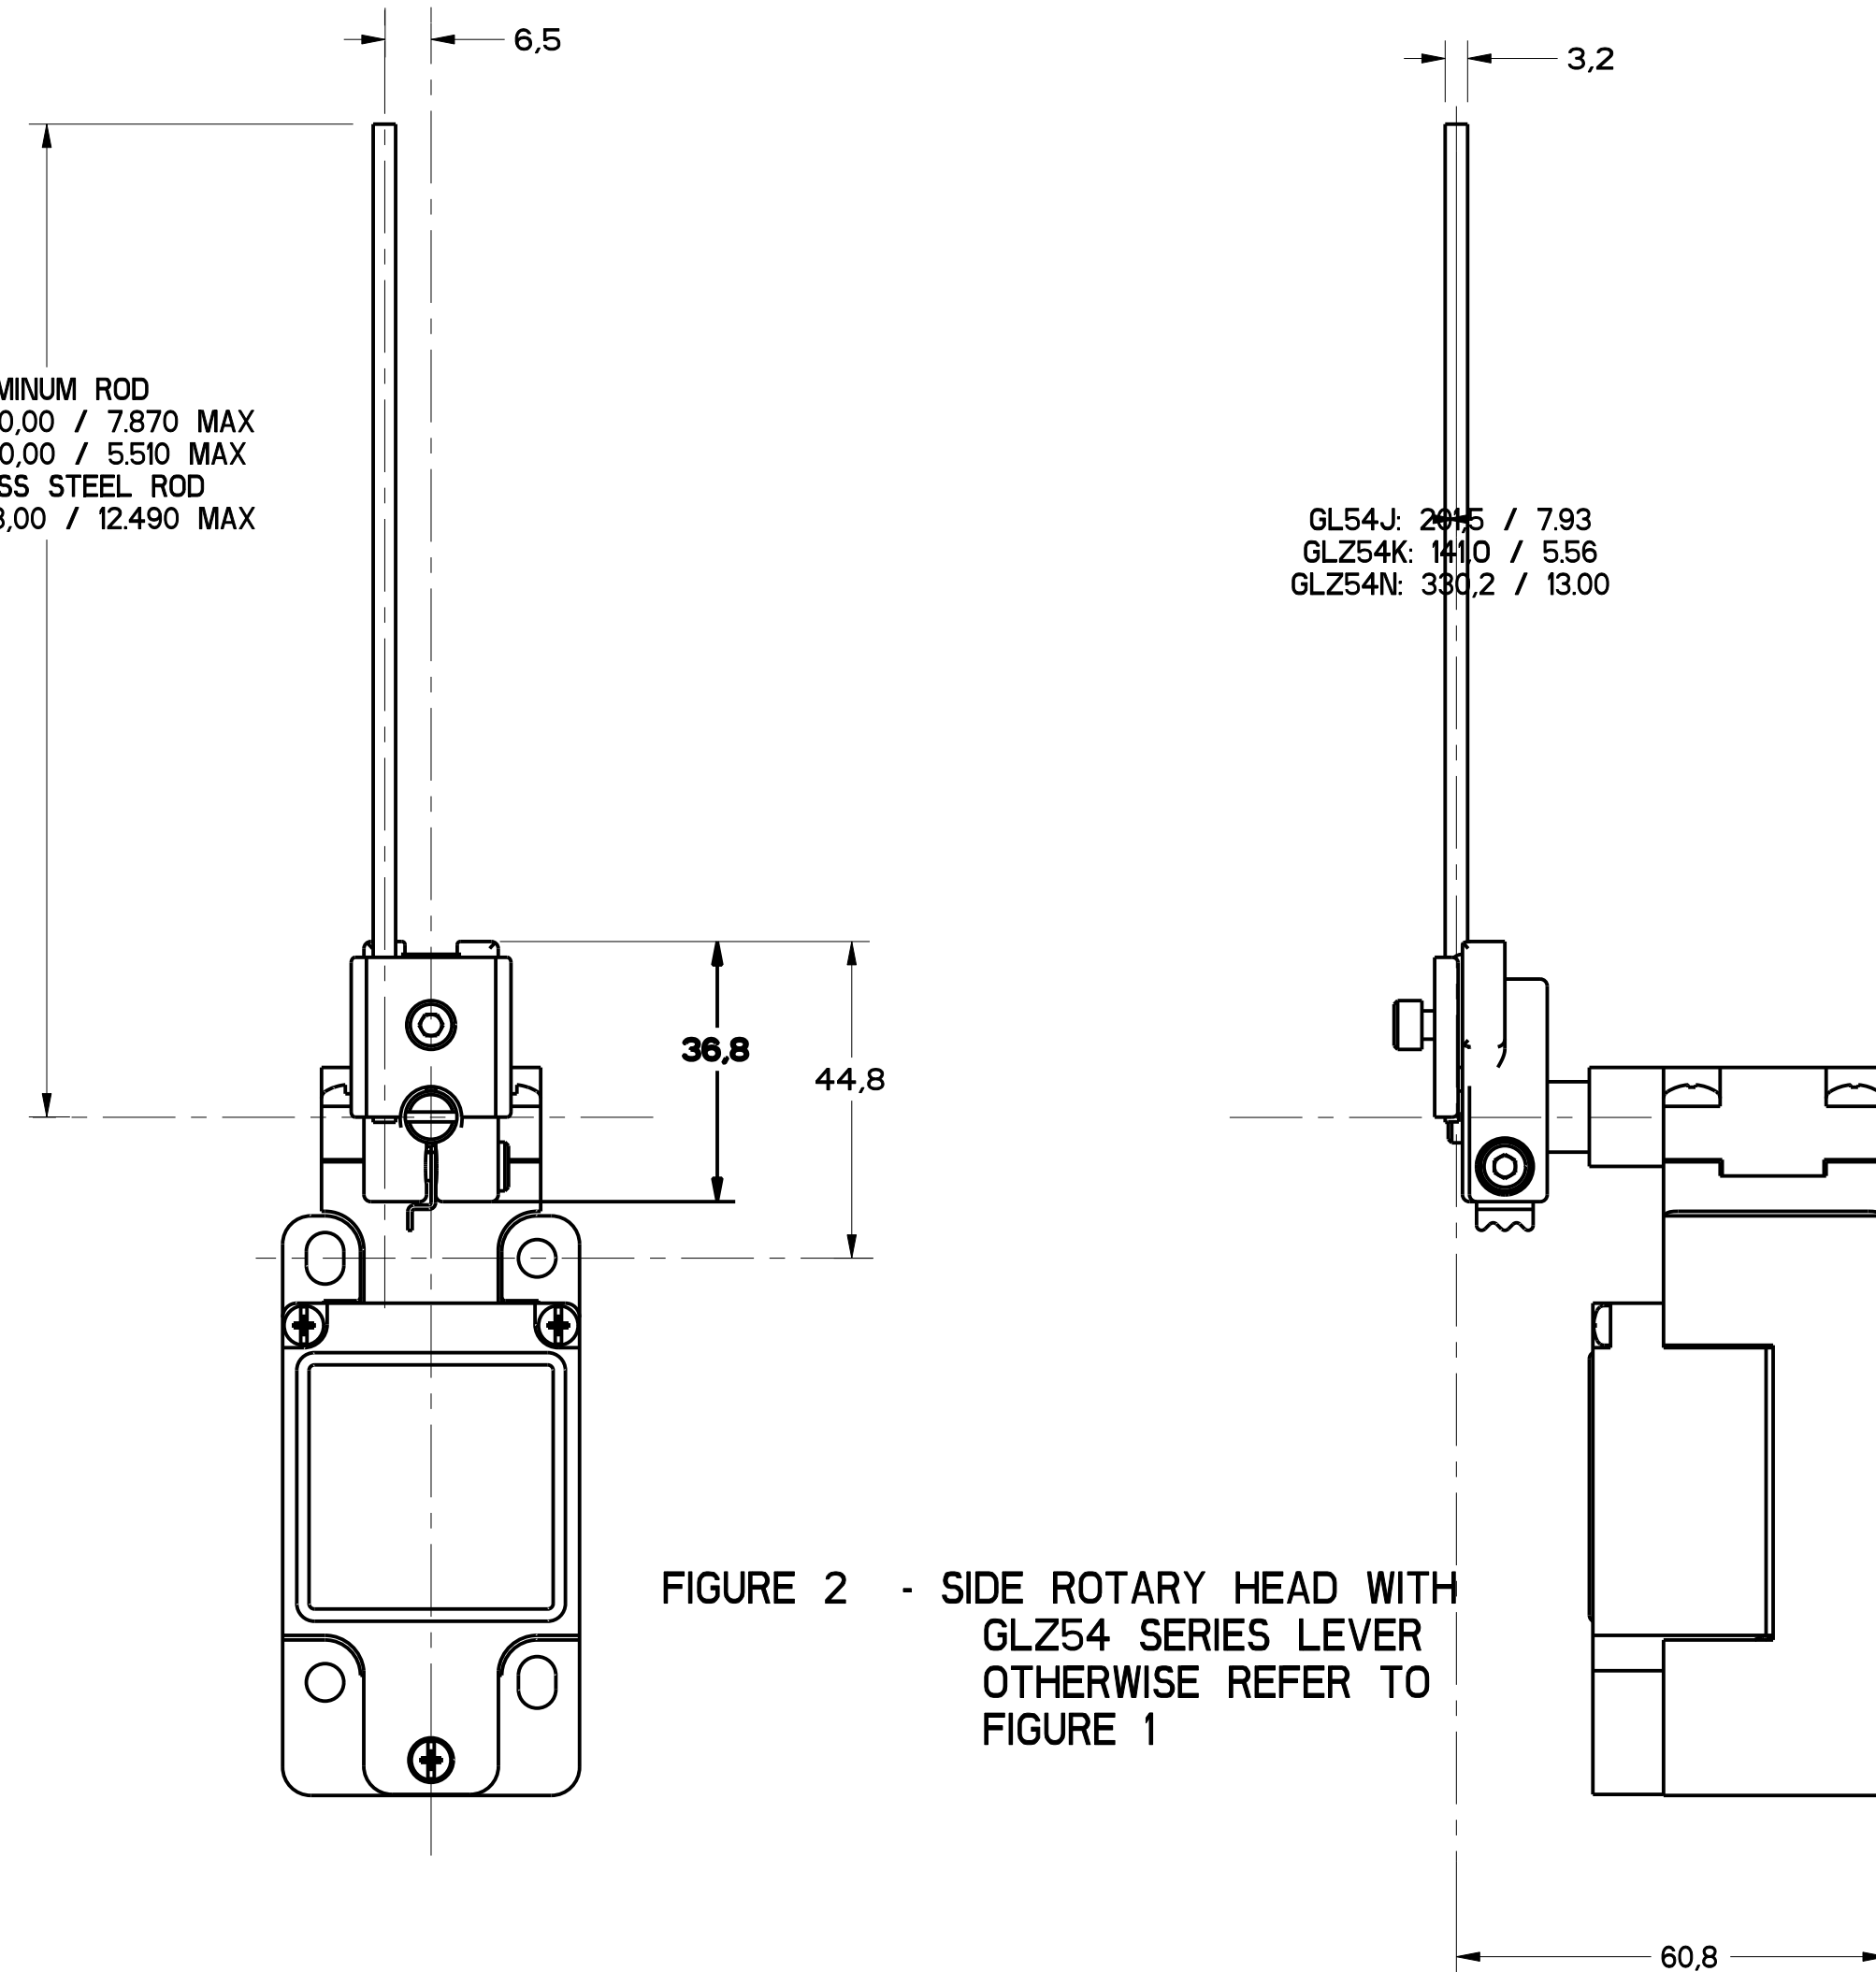


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
Ue	Ie	Ue	Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

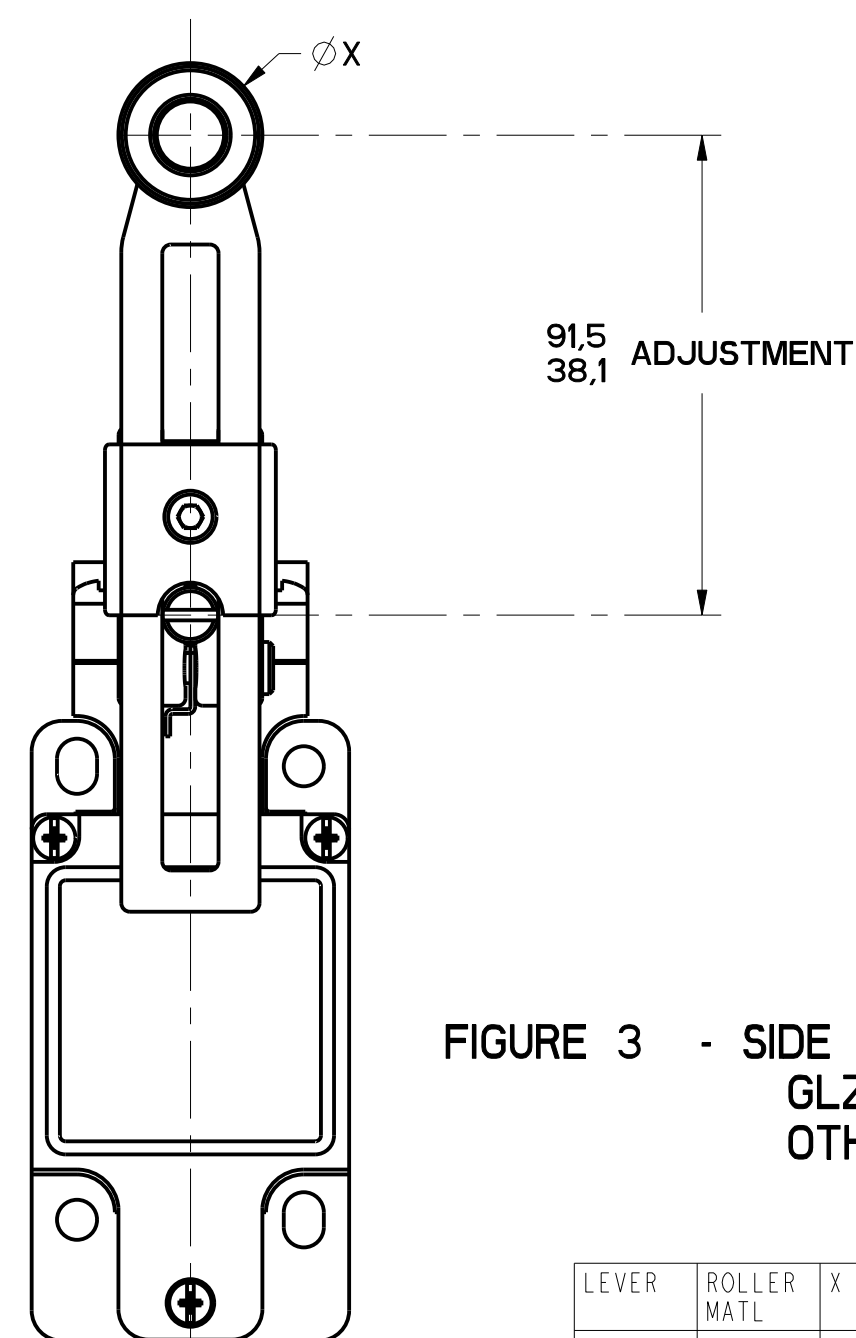


FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GL*A***	1A	N/A	N/A
GL*B***	1B	N/A	N/A
GL*C***	1C	N/A	N/A
GL*D***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION				
				
SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :				
	DM	TOL	DM	TOL
	(mm)	(in)		(mil)
NO PLACES	X	1/4, 5/4	1.8	0.8/ 0.3
ONE PLACE	X.X	0.4/ 0.18	1.18	0.38/ 0.1
TWO PLACES	X.XX	0.01/ .006	1.182	0.13/ .009
THREE PLACES		±.001		
ANGLES		±.2°		
DESIGN UNITS		SI METRIC	US CUSTOMARY	
		☒	☐	

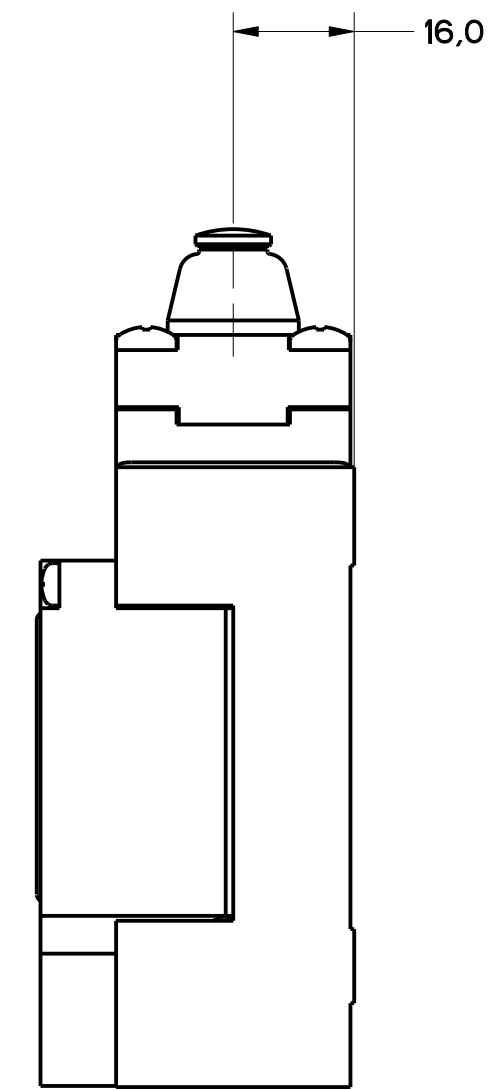


STEEL ROLLER

Ø 12,4

50,5

Technical drawing of a lamp head (Lampenkopf) showing dimensions. The drawing includes a side view and a top view. The side view shows a cylindrical body with a flared top. The top view shows a circular base with a central protrusion. Dimensions are indicated: 4,7 for the height of the central protrusion and 16,0 for the diameter of the base.

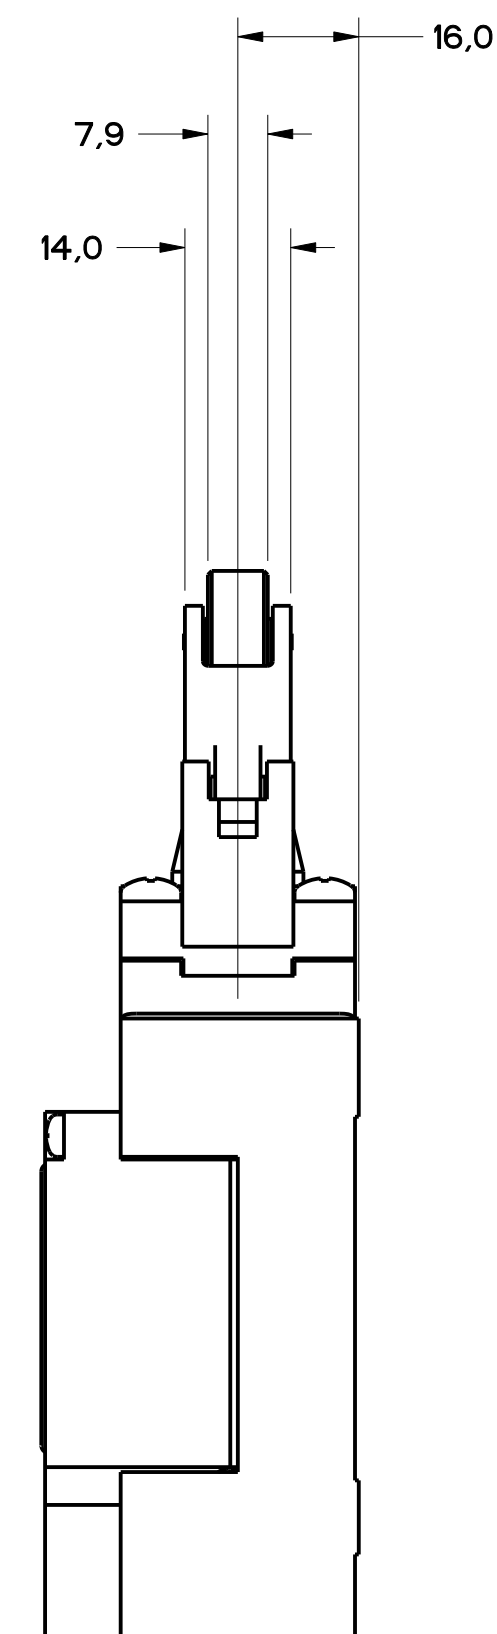

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>mm</td> <td>mm/1.6</td> <td>mm</td> <td>mm/1.6</td> </tr> <tr> <td>NO PLACES</td> <td>1.64</td> <td>1.1</td> <td>0.81 (0.5)</td> </tr> <tr> <td>ONE PLACE</td> <td>0.40 (0.16)</td> <td>1.13</td> <td>0.80 (0.5)</td> </tr> <tr> <td>TWO PLACES</td> <td>0.15 (0.06)</td> <td>1.133</td> <td>0.813 (0.5)</td> </tr> <tr> <td>THREE PLACES</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ANGLES</td> <td>± 2</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	mm	mm/1.6	mm	mm/1.6	NO PLACES	1.64	1.1	0.81 (0.5)	ONE PLACE	0.40 (0.16)	1.13	0.80 (0.5)	TWO PLACES	0.15 (0.06)	1.133	0.813 (0.5)	THREE PLACES				ANGLES	± 2		
DIM	TOL	DIM	TOL																												
mm	mm/1.6	mm	mm/1.6																												
NO PLACES	1.64	1.1	0.81 (0.5)																												
ONE PLACE	0.40 (0.16)	1.13	0.80 (0.5)																												
TWO PLACES	0.15 (0.06)	1.133	0.813 (0.5)																												
THREE PLACES																															
ANGLES	± 2																														
FED. MFG. CODE 91929	CATALOG LISTING	<table border="1"> <tr> <td>SI METRIC</td> <td>US CUSTOMARY</td> </tr> <tr> <td>☒</td> <td>☐</td> </tr> </table>		SI METRIC	US CUSTOMARY	☒	☐																								
SI METRIC	US CUSTOMARY																														
☒	☐																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2																													
		DESIGN UNITS																													
		WEIGHT																													

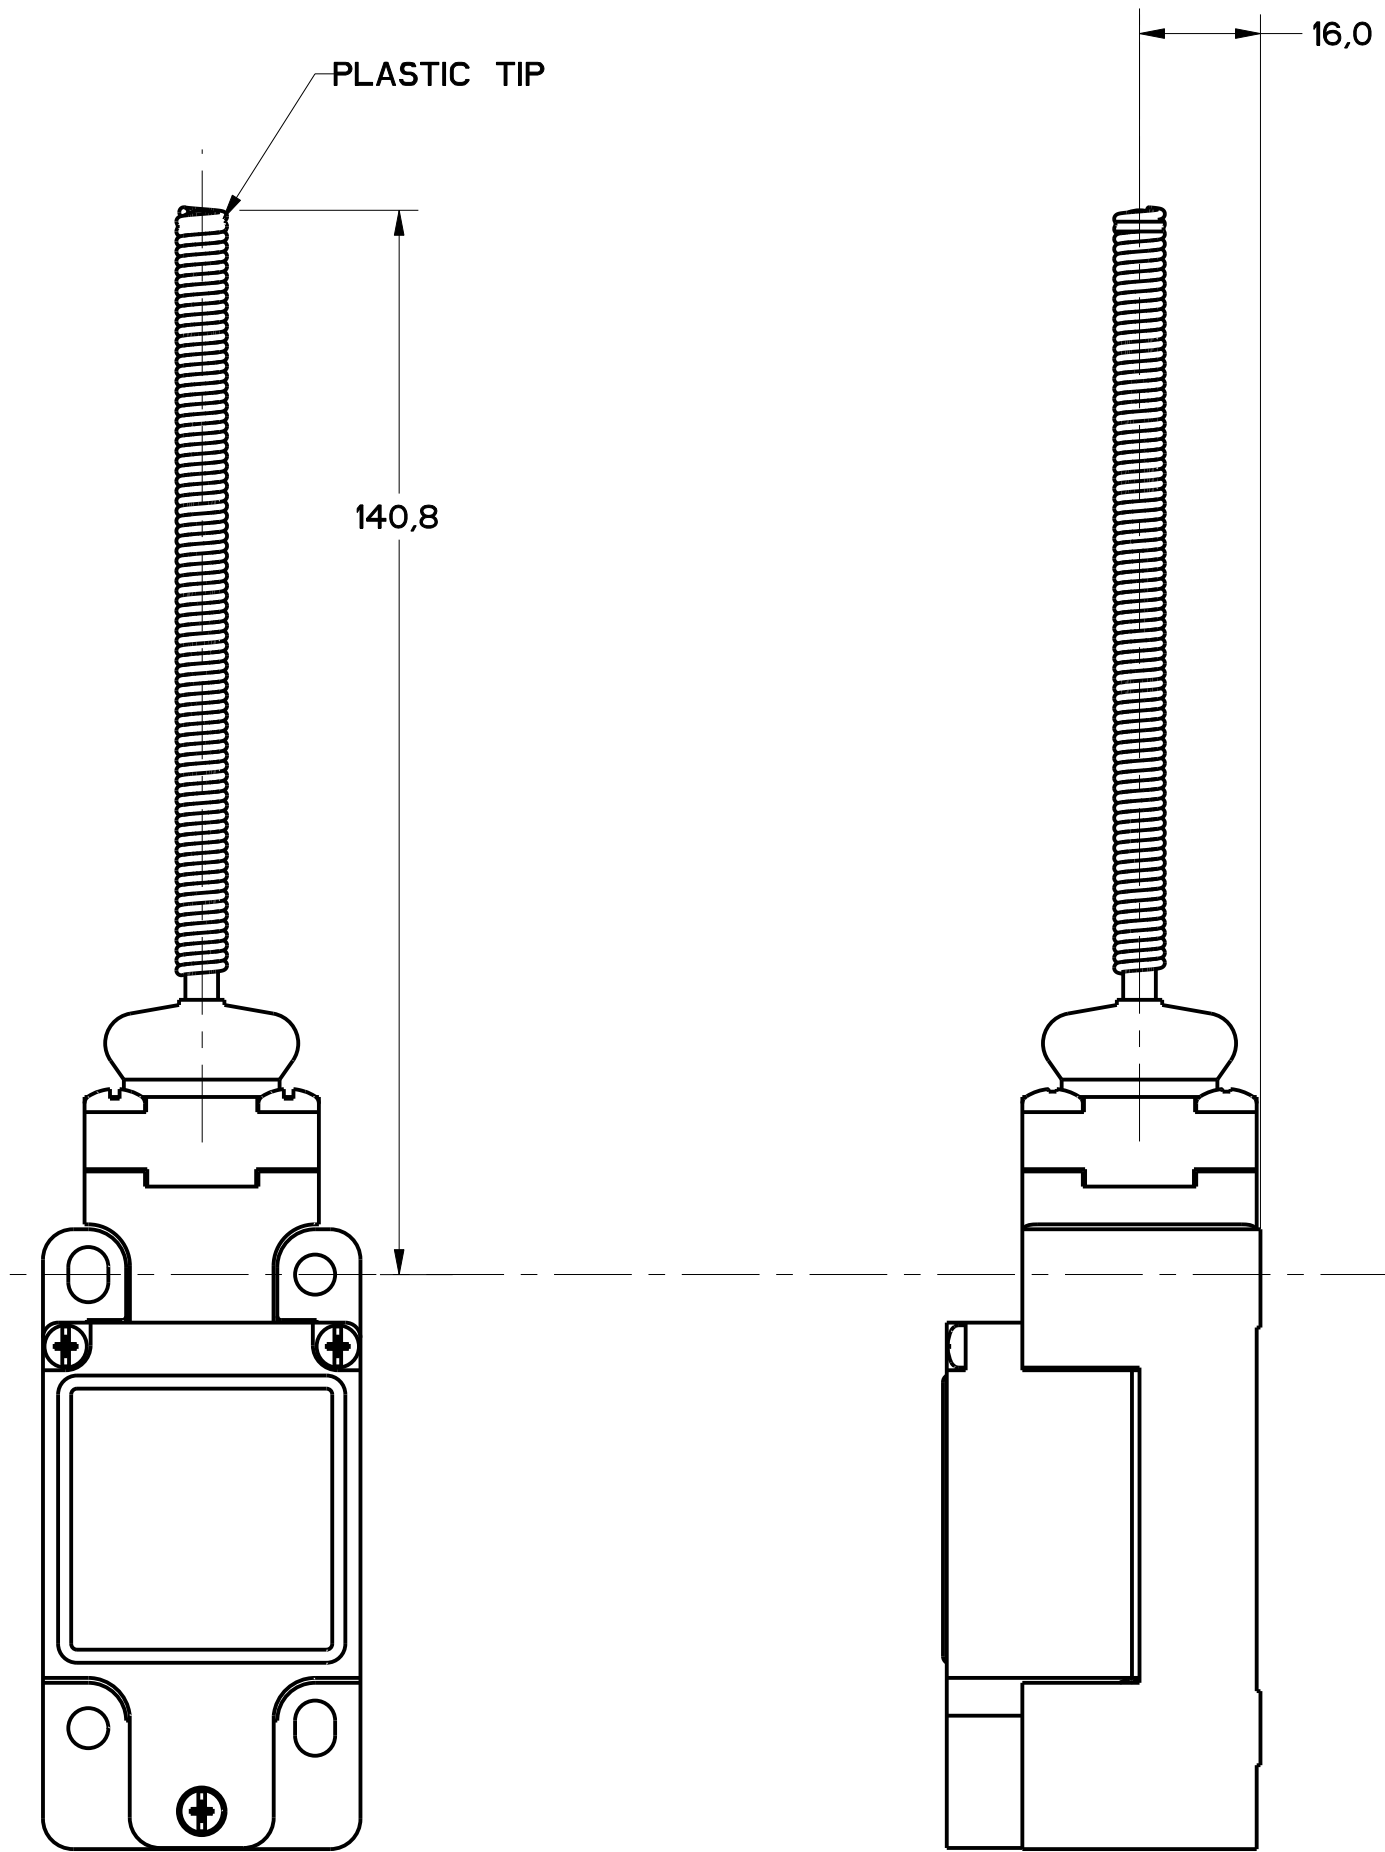


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

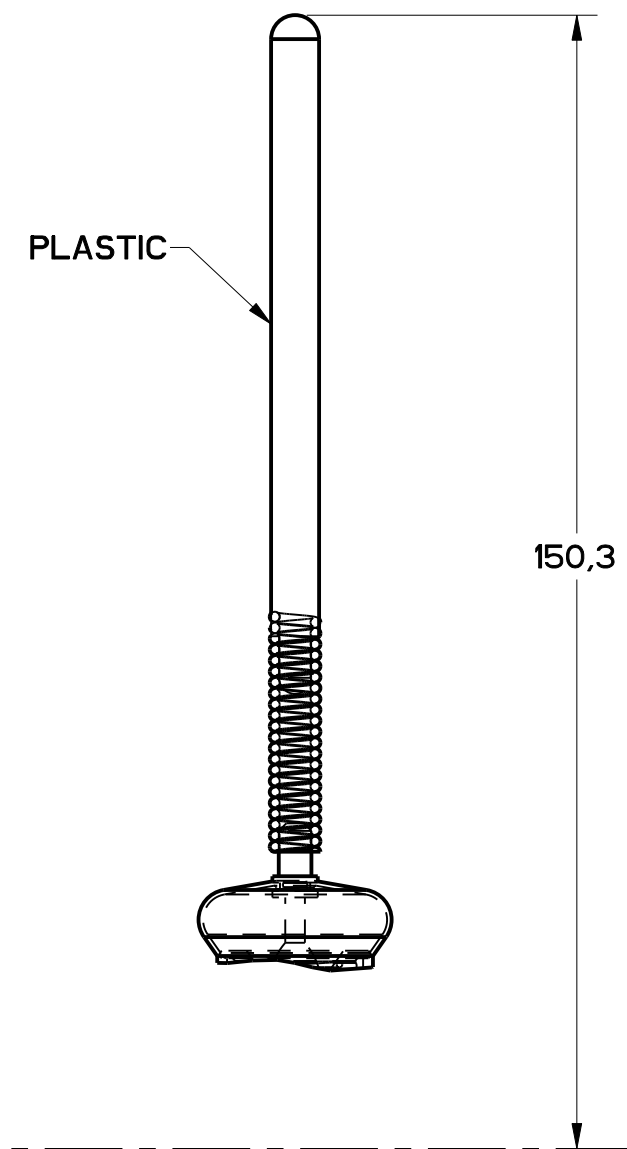


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

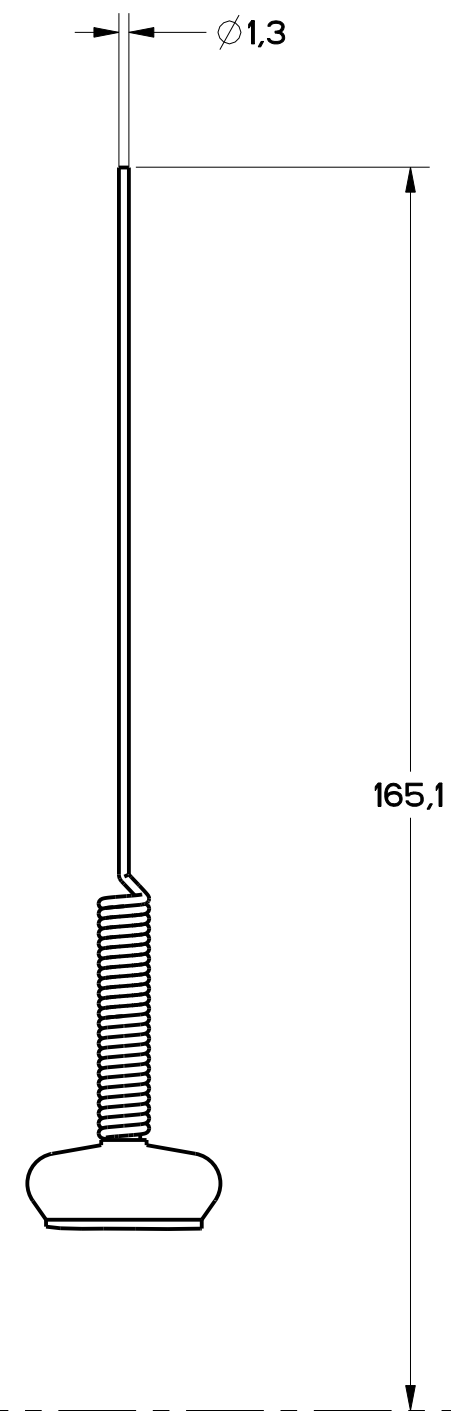


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

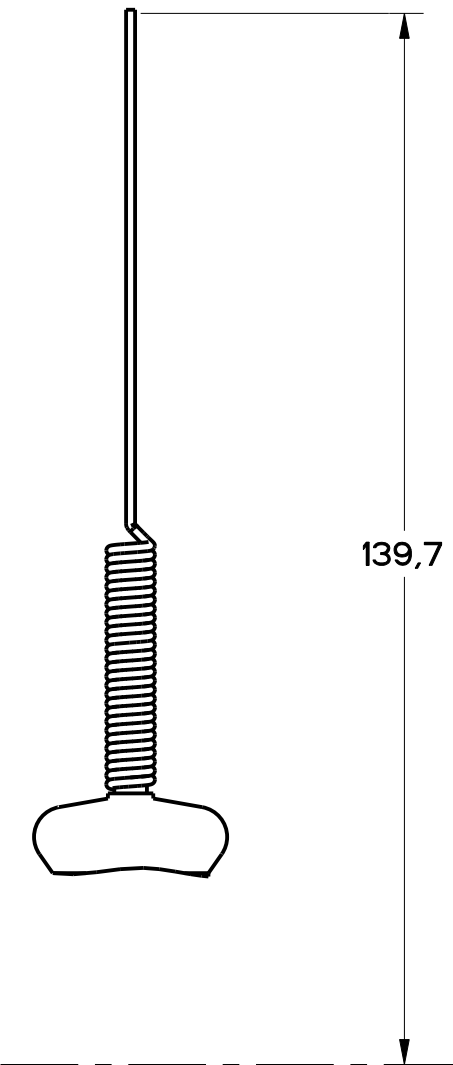


FIGURE 7C -
CAT WHISKER
ACTUATOR STAINLESS
STEEL SPRING
OTHERWISE SAME AS
FIGURE 7

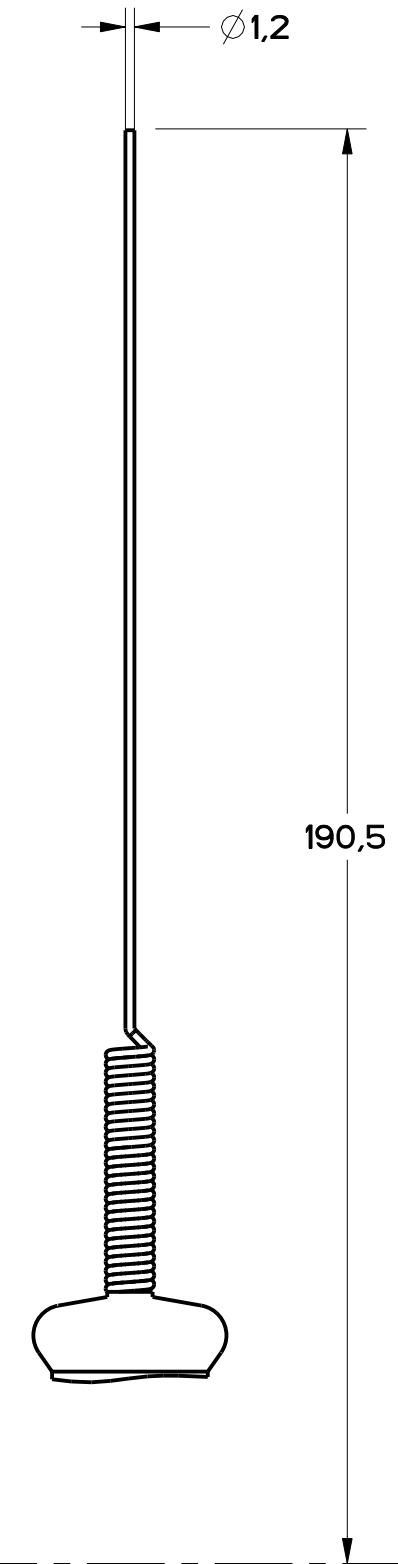


FIGURE 7D -
CAT WHISKER
ACTUATOR, STAINLESS
STEEL SPRING,
OTHERWISE SAME
AS FIGURE 7

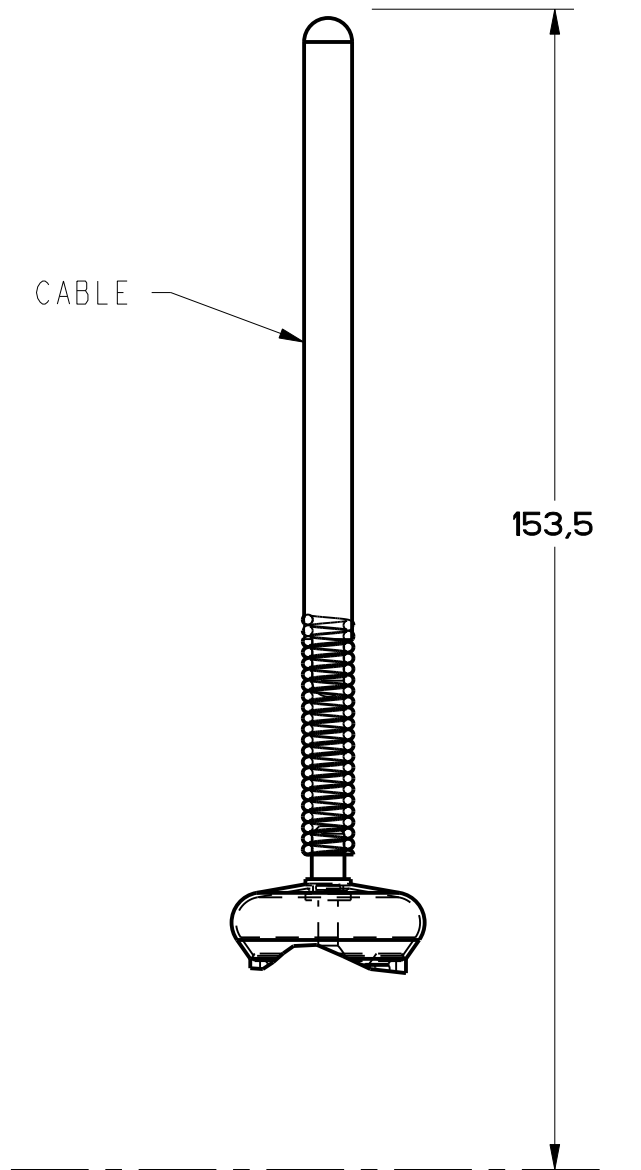


FIGURE 7E -
CABLE WOBBLE
ACTUATOR
OTHERWISE SAME
AS FIGURE 7

PTC/CAD		DRAWN		M		GL SERIES CHART 2		PAGE 3 OF 8		RELEASE NO: PR-21557		REVISED	
SAVT MAY 96		SAVT MAY 96		C		11		DRAWING NUMBER		C		REVISED	
C		C		A		REVISED		C		C		REVISED	
C		C		B		REVISED		C		C		REVISED	
C		C		C		REVISED		C		C		REVISED	
C		C		D		REVISED		C		C		REVISED	
C		C		E		REVISED		C		C		REVISED	
C		C		F		REVISED		C		C		REVISED	
C		C		G		REVISED		C		C		REVISED	
C		C		H		REVISED		C		C		REVISED	
C		C		I		REVISED		C		C		REVISED	
C		C		J		REVISED		C		C		REVISED	
C		C		K		REVISED		C		C		REVISED	
C		C		L		REVISED		C		C		REVISED	
C		C		M		REVISED		C		C		REVISED	
C		C		N		REVISED		C		C		REVISED	
C		C		O		REVISED		C		C		REVISED	
C		C		P		REVISED		C		C		REVISED	
C		C		Q		REVISED		C		C		REVISED	
C		C		R		REVISED		C		C		REVISED	
C		C		S		REVISED		C		C		REVISED	
C		C		T		REVISED		C		C		REVISED	
C		C		U		REVISED		C		C		REVISED	
C		C		V		REVISED		C		C		REVISED	
C		C		W		REVISED		C		C		REVISED	
C		C		X		REVISED		C		C		REVISED	
C		C		Y		REVISED		C		C		REVISED	
C		C		Z		REVISED		C		C		REVISED	
C		C		AA		REVISED		C		C		REVISED	
C		C		AB		REVISED		C		C		REVISED	
C		C		AC		REVISED		C		C		REVISED	
C		C		AD		REVISED		C		C		REVISED	
C		C		AE		REVISED		C		C		REVISED	
C		C		AF		REVISED		C		C		REVISED	
C		C		AG		REVISED		C		C		REVISED	
C		C		AH		REVISED		C		C		REVISED	
C		C		AI		REVISED		C		C		REVISED	
C		C		AJ		REVISED		C		C		REVISED	
C		C		AK		REVISED		C		C		REVISED	
C		C		AL		REVISED		C		C		REVISED	
C		C		AM		REVISED		C		C		REVISED	
C		C		AN		REVISED		C		C		REVISED	
C		C		AO		REVISED		C		C		REVISED	
C		C		AP		REVISED		C		C		REVISED	
C		C		AQ		REVISED		C		C		REVISED	
C		C		AR		REVISED		C		C		REVISED	
C		C		AS		REVISED		C		C		REVISED	
C		C		AT		REVISED		C		C		REVISED	
C		C		AU		REVISED		C		C		REVISED	
C		C		AV		REVISED		C		C		REVISED	
C		C		AW		REVISED		C		C		REVISED	
C		C		AX		REVISED		C		C		REVISED	
C		C		AY		REVISED		C		C		REVISED	
C		C		AZ		REVISED		C		C		REVISED	
C		C		BA		REVISED		C		C		REVISED	
C		C		BB		REVISED		C		C		REVISED	
C		C		BC		REVISED		C		C		REVISED	
C		C		BD		REVISED		C		C		REVISED	
C		C		BE		REVISED		C		C		REVISED	
C		C		BF		REVISED		C		C		REVISED	
C		C		BG		REVISED		C		C		REVISED	
C		C		BH		REVISED		C		C		REVISED	
C		C		BI		REVISED		C		C		REVISED	
C		C		BJ		REVISED		C		C		REVISED	
C		C		BK		REVISED		C		C		REVISED	
C		C		BL		REVISED		C		C		REVISED	
C		C		BM		REVISED		C		C		REVISED	
C		C		BN		REVISED		C		C		REVISED	
C		C		BO		REVISED		C		C		REVISED	
C		C		BP		REVISED		C		C		REVISED	
C		C		BQ		REVISED		C		C		REVISED	
C		C		BR		REVISED		C		C		REVISED	
C		C		BS		REVISED		C		C		REVISED	
C		C		BT		REVISED		C		C		REVISED	
C		C		BU		REVISED		C		C		REVISED	
C		C		BV		REVISED		C		C		REVISED	
C		C		BW		REVISED		C		C		REVISED	
C		C		BX		REVISED		C		C		REVISED	
C		C		BY		REVISED		C		C		REVISED	
C		C		BZ		REVISED		C		C		REVISED	
C		C		CA		REVISED		C		C		REVISED	
C		C		CB		REVISED		C		C		REVISED	
C		C		CC		REVISED		C		C		REVISED	
C		C		CD		REVISED		C		C		REVISED	
C		C		CE		REVISED		C		C		REVISED	
C		C		CF		REVISED		C		C		REVISED	
C		C		CG		REVISED		C		C		REVISED	
C		C		CH		REVISED		C		C		REVISED	
C		C		CI		REVISED		C		C		REVISED	
C		C		CJ		REVISED		C		C		REVISED	
C		C		CK		REVISED		C		C		REVISED	
C		C		CL		REVISED		C		C		REVISED	
C		C		CM		REVISED		C		C		REVISED	
C		C		CN		REVISED		C		C		REVISED	
C		C		CO		REVISED		C		C		REVISED	
C		C		CP		REVISED		C		C		REVISED	
C		C		CQ		REVISED		C		C		REVISED	
C		C		CR		REVISED		C		C		REVISED	
C		C		CS		REVISED		C		C		REVISED	
C		C		CT		REVISED		C		C		REVISED	
C		C		CU		REVISED		C		C		REVISED	
C		C		CV		REVISED		C		C		REVISED	
C		C		CW		REVISED		C		C		REVISED	
C		C		CX		REVISED		C		C		REVISED	
C		C		CY		REVISED		C		C		REVISED	
C		C		CZ		REVISED		C		C		REVISED	
C		C		DA		REVISED		C		C		REVISED	
C		C		DB		REVISED		C		C		REVISED	
C		C		DC		REVISED		C		C		REVISED	
C		C		DD		REVISED		C		C		REVISED	
C		C		DE		REVISED		C		C		REVISED	
C		C		DF		REVISED		C		C		REVISED	
C		C		DG		REVISED		C		C		REVISED	
C		C		DH		REVISED		C		C		REVISED	
C		C		DI		REVISED		C		C		REVISED	
C		C		DJ		REVISED		C		C		REVISED	
C		C		DK		REVISED		C		C		REVISED	
C		C		DL		REVISED		C		C		REVISED	
C		C		DM		REVISED		C		C		REVISED	
C		C		DN		REVISED		C		C		REVISED	
C		C		DO		REVISED		C		C		REVISED	
C		C		DP		REVISED		C		C		REVISED	
C		C		DQ		REVISED		C		C		REVISED	
C		C		DR		REVISED		C		C		REVISED	
C		C		DS		REVISED		C		C		REVISED	
C		C		DT		REVISED		C		C		REVISED	
C		C		DU		REVISED		C		C		REVISED	
C		C		DV		REVISED		C		C		REVISED	
C		C		DW		REVISED		C		C		REVISED	
C		C		DX		REVISED		C		C		REVISED	
C		C		DY		REVISED		C		C		REVISED	
C		C		DZ		REVISED		C		C		REVISED	
C		C		EA		REVISED		C		C		REVISED	
C		C		EB		REVISED		C		C		REVISED	
C		C		EC		REVISED		C		C		REVISED	
C		C		ED		REVISED		C		C		REVISED	
C		C		EE		REVISED		C		C		REVISED	
C		C		EF		REVISED		C		C		REVISED	
C		C		EG		REVISED		C		C		REVISED	
C		C		EH		REVISED		C		C		REVISED	
C		C		EI		REVISED		C		C		REVISED	
C		C		EJ		REVISED		C		C		REVISED	
C		C		EK		REVISED		C		C		REVISED	
C		C		EL		REVISED		C		C		REVISED	
C		C		EM		REVISED		C		C		REVISED	
C		C		EN		REVISED		C		C		REVISED	
C		C		EO		REVISED		C		C		REVISED	
C		C		EP		REVISED		C		C		REVISED	
C		C		EQ		REVISED		C		C		REVISED	
C		C		ER		REVISED		C		C		REVISED	
C		C		ES		REVISED		C		C		REVISED	
C		C		ET		REVISED		C		C		REVISED	
C		C		EU		REVISED		C		C		REVISED	
C		C		EV		REVISED		C		C		REVISED	
C		C		EW		REVISED		C		C		REVISED	
C		C		EX		REVISED		C		C		REVISED	
C		C		EY		REVISED		C		C		REVISED	
C		C		EZ		REVISED		C		C		REVISED	
C		C		FA		REVISED		C		C		REVISED	
C		C		FB		REVISED		C		C		REVISED	
C		C		FC		REVISED		C		C		REVISED	
C		C		FD		REVISED		C		C		REVISED	
C		C		FE		REVISED		C		C		REVISED	
C		C		FF		REVISED		C		C		REVISED	
C		C		FG		REVISED		C		C		REVISED	
C		C		FH		REVISED		C		C		REVISED	
C		C		FI		REVISED		C		C		REVISED	
C		C		FJ		REVISED		C		C		REVISED	
C		C		FK		REVISED		C		C		REVISED	
C		C		FL		REVISED		C		C		REVISED	
C		C		FM		REVISED		C		C		REVISED	
C		C		FN		REVISED		C		C		REVISED	
C		C		FO		REVISED		C		C		REVISED	
C		C		FP		REVISED		C		C		REVISED	
C		C		FQ		REVISED		C		C		REVISED	
C		C		FR		REVISED		C		C		REVISED	
C		C		FS		REVISED		C		C		REVISED	
C		C		FT		REVISED		C		C		REVISED	
C		C		FU		REVISED		C		C</			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		DIM mm TOL mm/1/2 DIM in TOL in/1/2 NO PLACES X 1.7/64 ONE PLACE X, X 0.4/1.016 TWO PLACES X, X 1.1/32-0.06 THREE PLACES X 1.5/64-0.05 ANGLES ± 1/2° SI METRIC DESIGN UNITS WEIGHT	
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED GL SERIES CHART 2	
		US CUSTOMARY ☐	

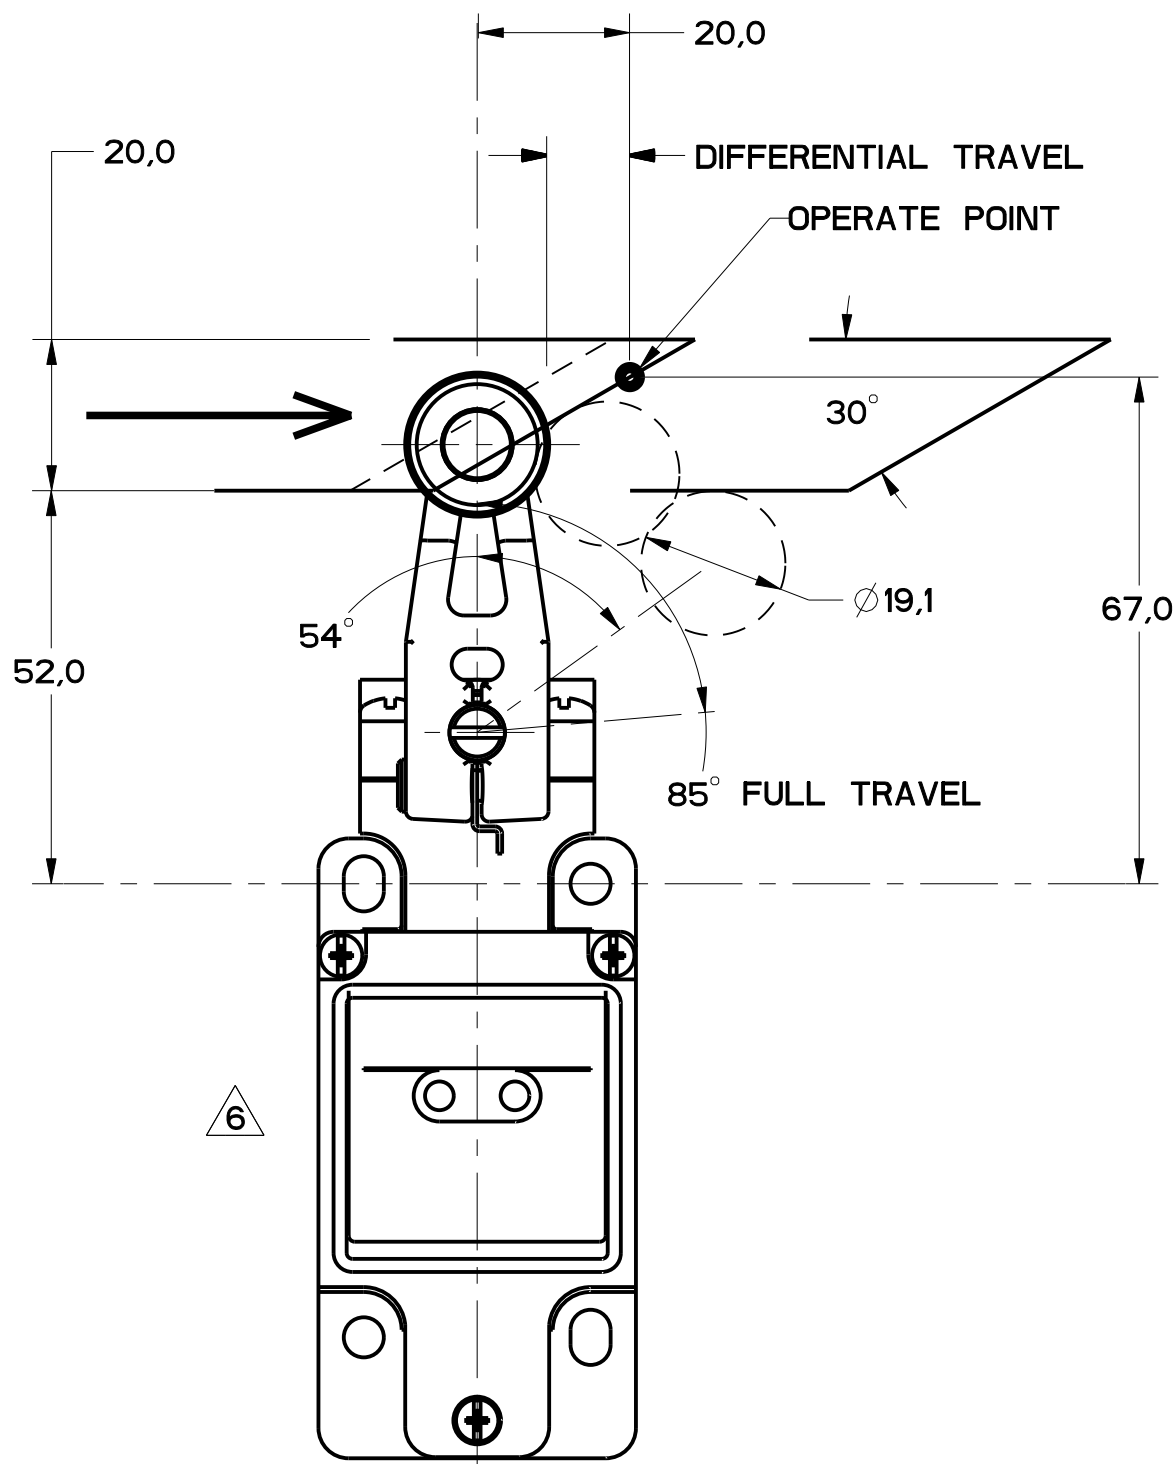


FIGURE 8

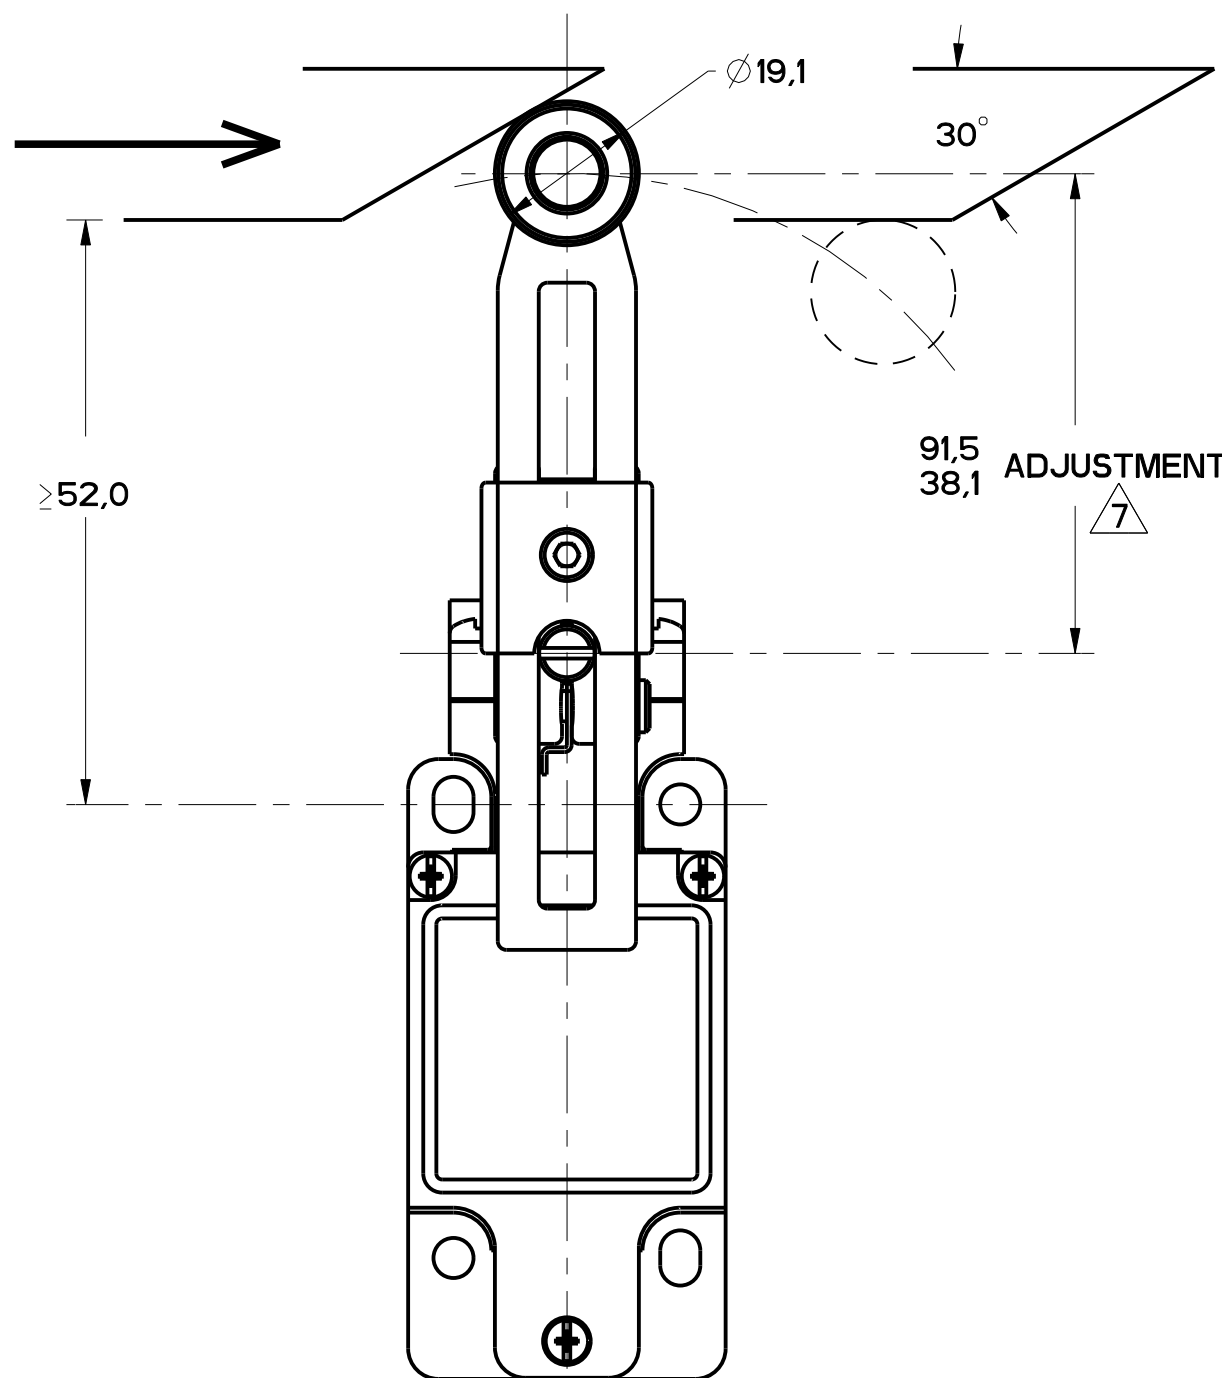


FIGURE 9

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

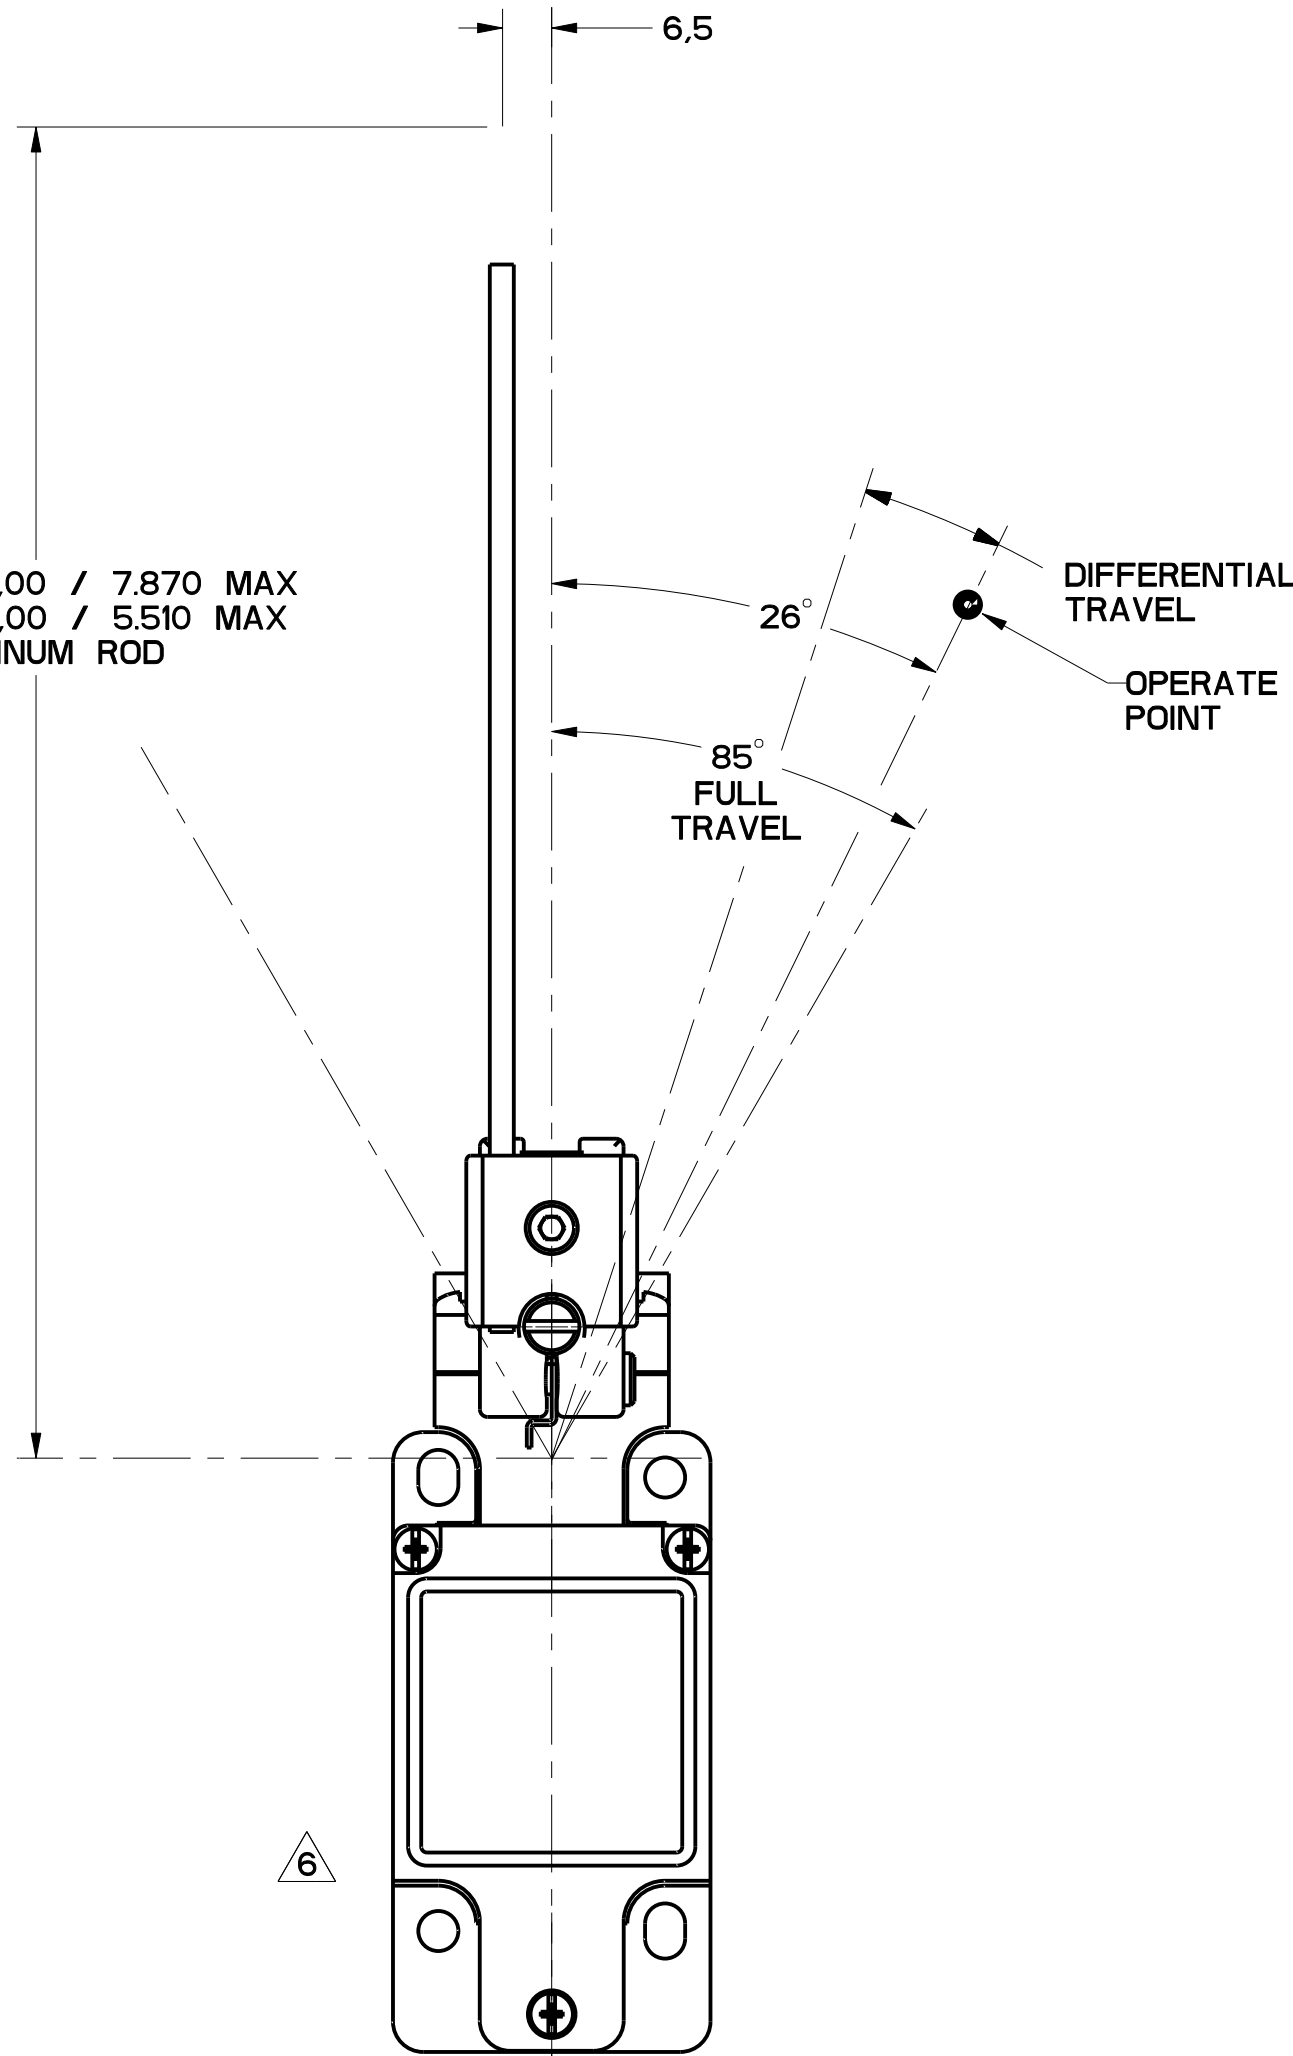


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE N- LB-IN	MAXIMUM DISCONNECT TORQUE N- LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 26° 55**° 85° 13-14 12° DIFFERENTIAL TRAVEL	330 2.9	385 3.4	1290	13	250


CAM ACTUATION PER EN50041, FIGURES 8 AND 9

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 0 20 56** 13-14 12 DIFFERENTIAL TRAVEL	9.7 2.2	11.4 2.6	.85 33.5	.8.5 .33	250



FIGURE 12



FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{MM/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :

	IN	MM	IN	MM
NO PLACES	0.1	0.1	0.1	0.1
ONE PLACE	0.01	0.01	0.01	0.01
TWO PLACES	0.001	0.001	0.001	0.001
THREE PLACES	0.0001	0.0001	0.0001	0.0001
ANGLES	± 0.1°	± 0.1°	± 0.1°	± 0.1°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

SI METRIC	US CUSTOMARY
☒	☐

DESIGN UNITS

REVISIONS		
A	CO	78529
B	CO	81184
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

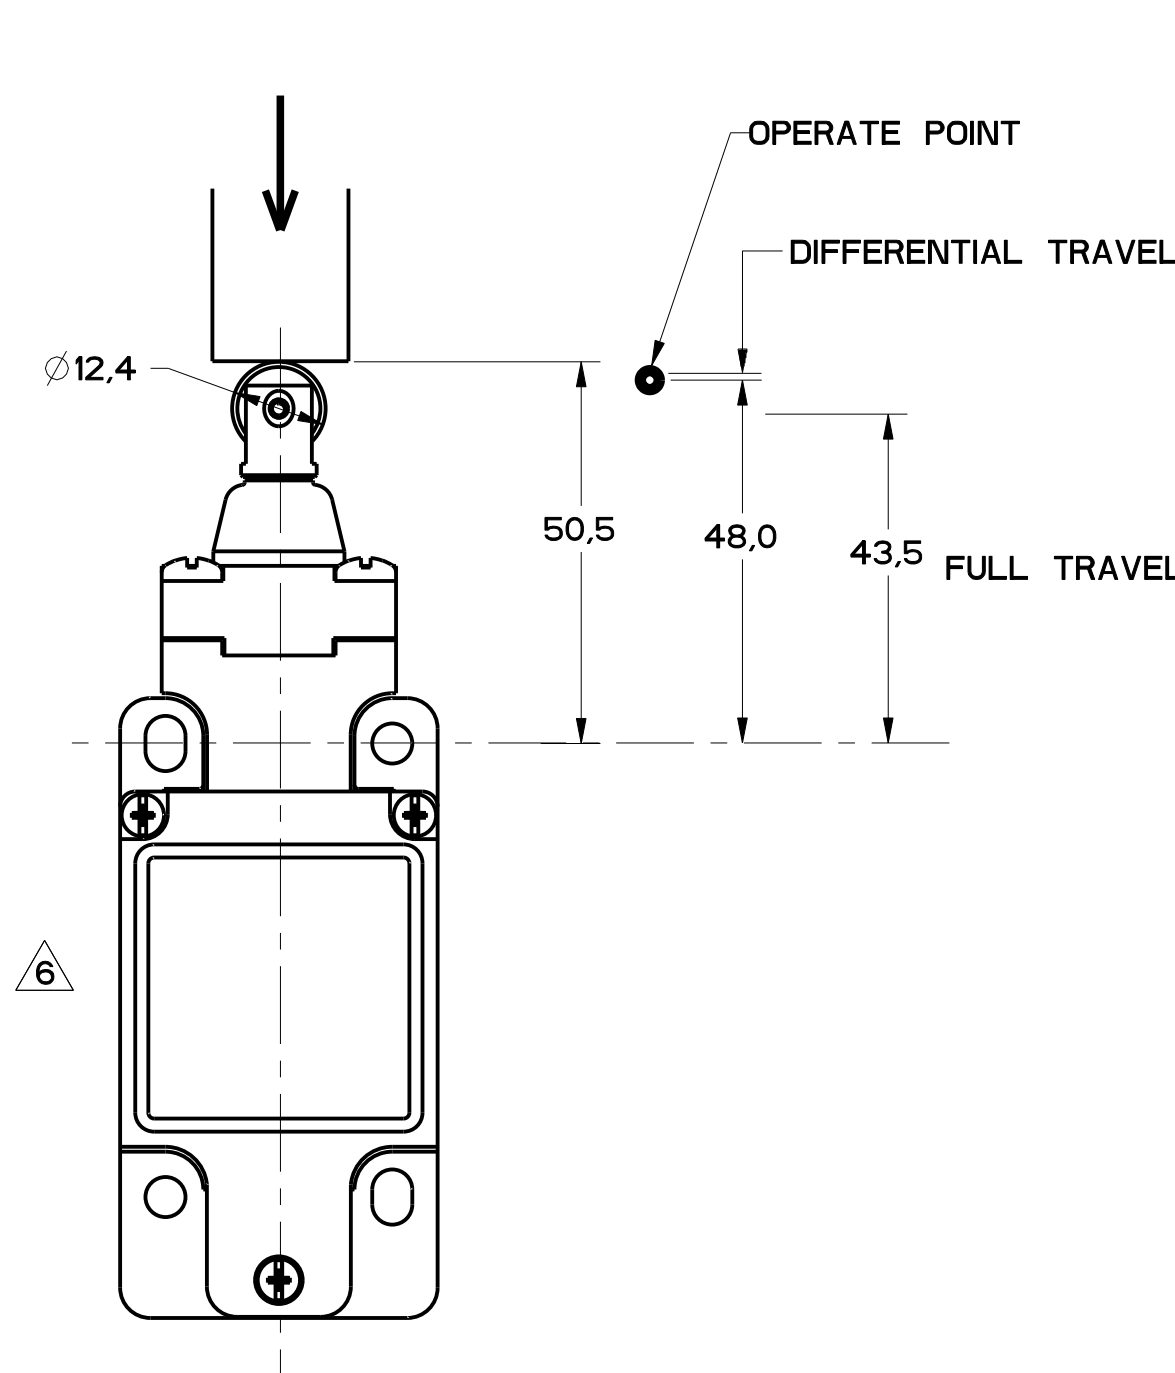


FIGURE 13A

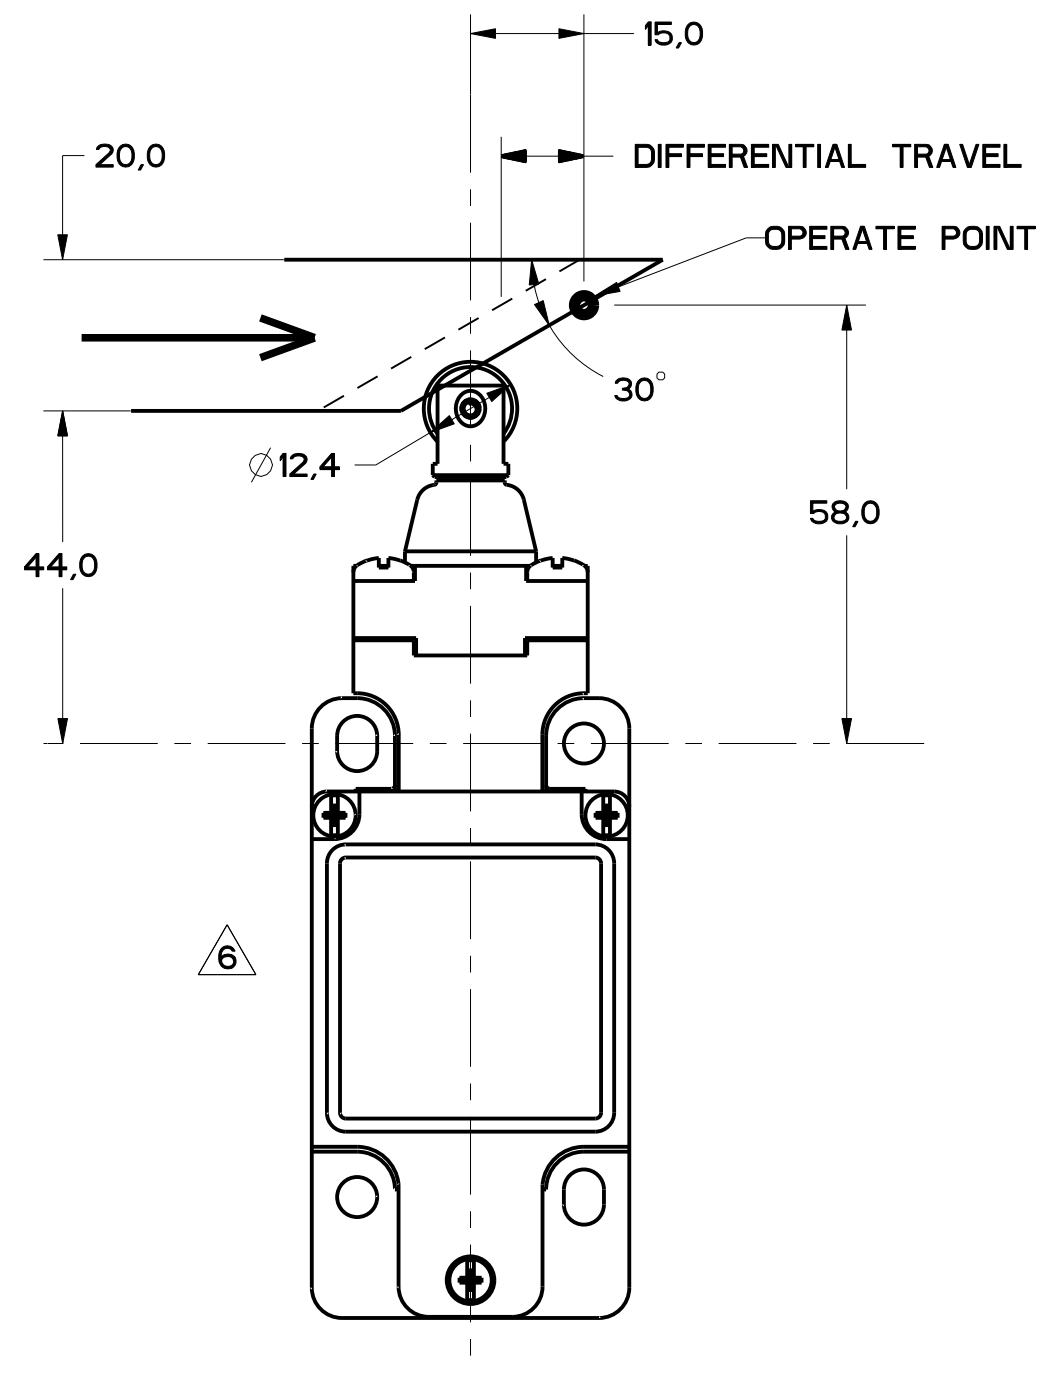


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	IN	TOL	MM	TOL
NO PLACES	X	1/16	1.0	0.01
ONE PLACE	X.X	0.0156	0.4	0.025
TWO PLACES	X.XX	0.0031	0.1	0.005
THREE PLACES	X.XXX	0.0008	0.025	0.001

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

REVISIONS		
A	1	180292
B	1	01
C	20	SEP 94
D	CO	93789
E	REV	200788
F	0000401	
G	011	2 JUN 93
H	0002986	
I	20	JAN 94
J	0017532	
K	0000005	

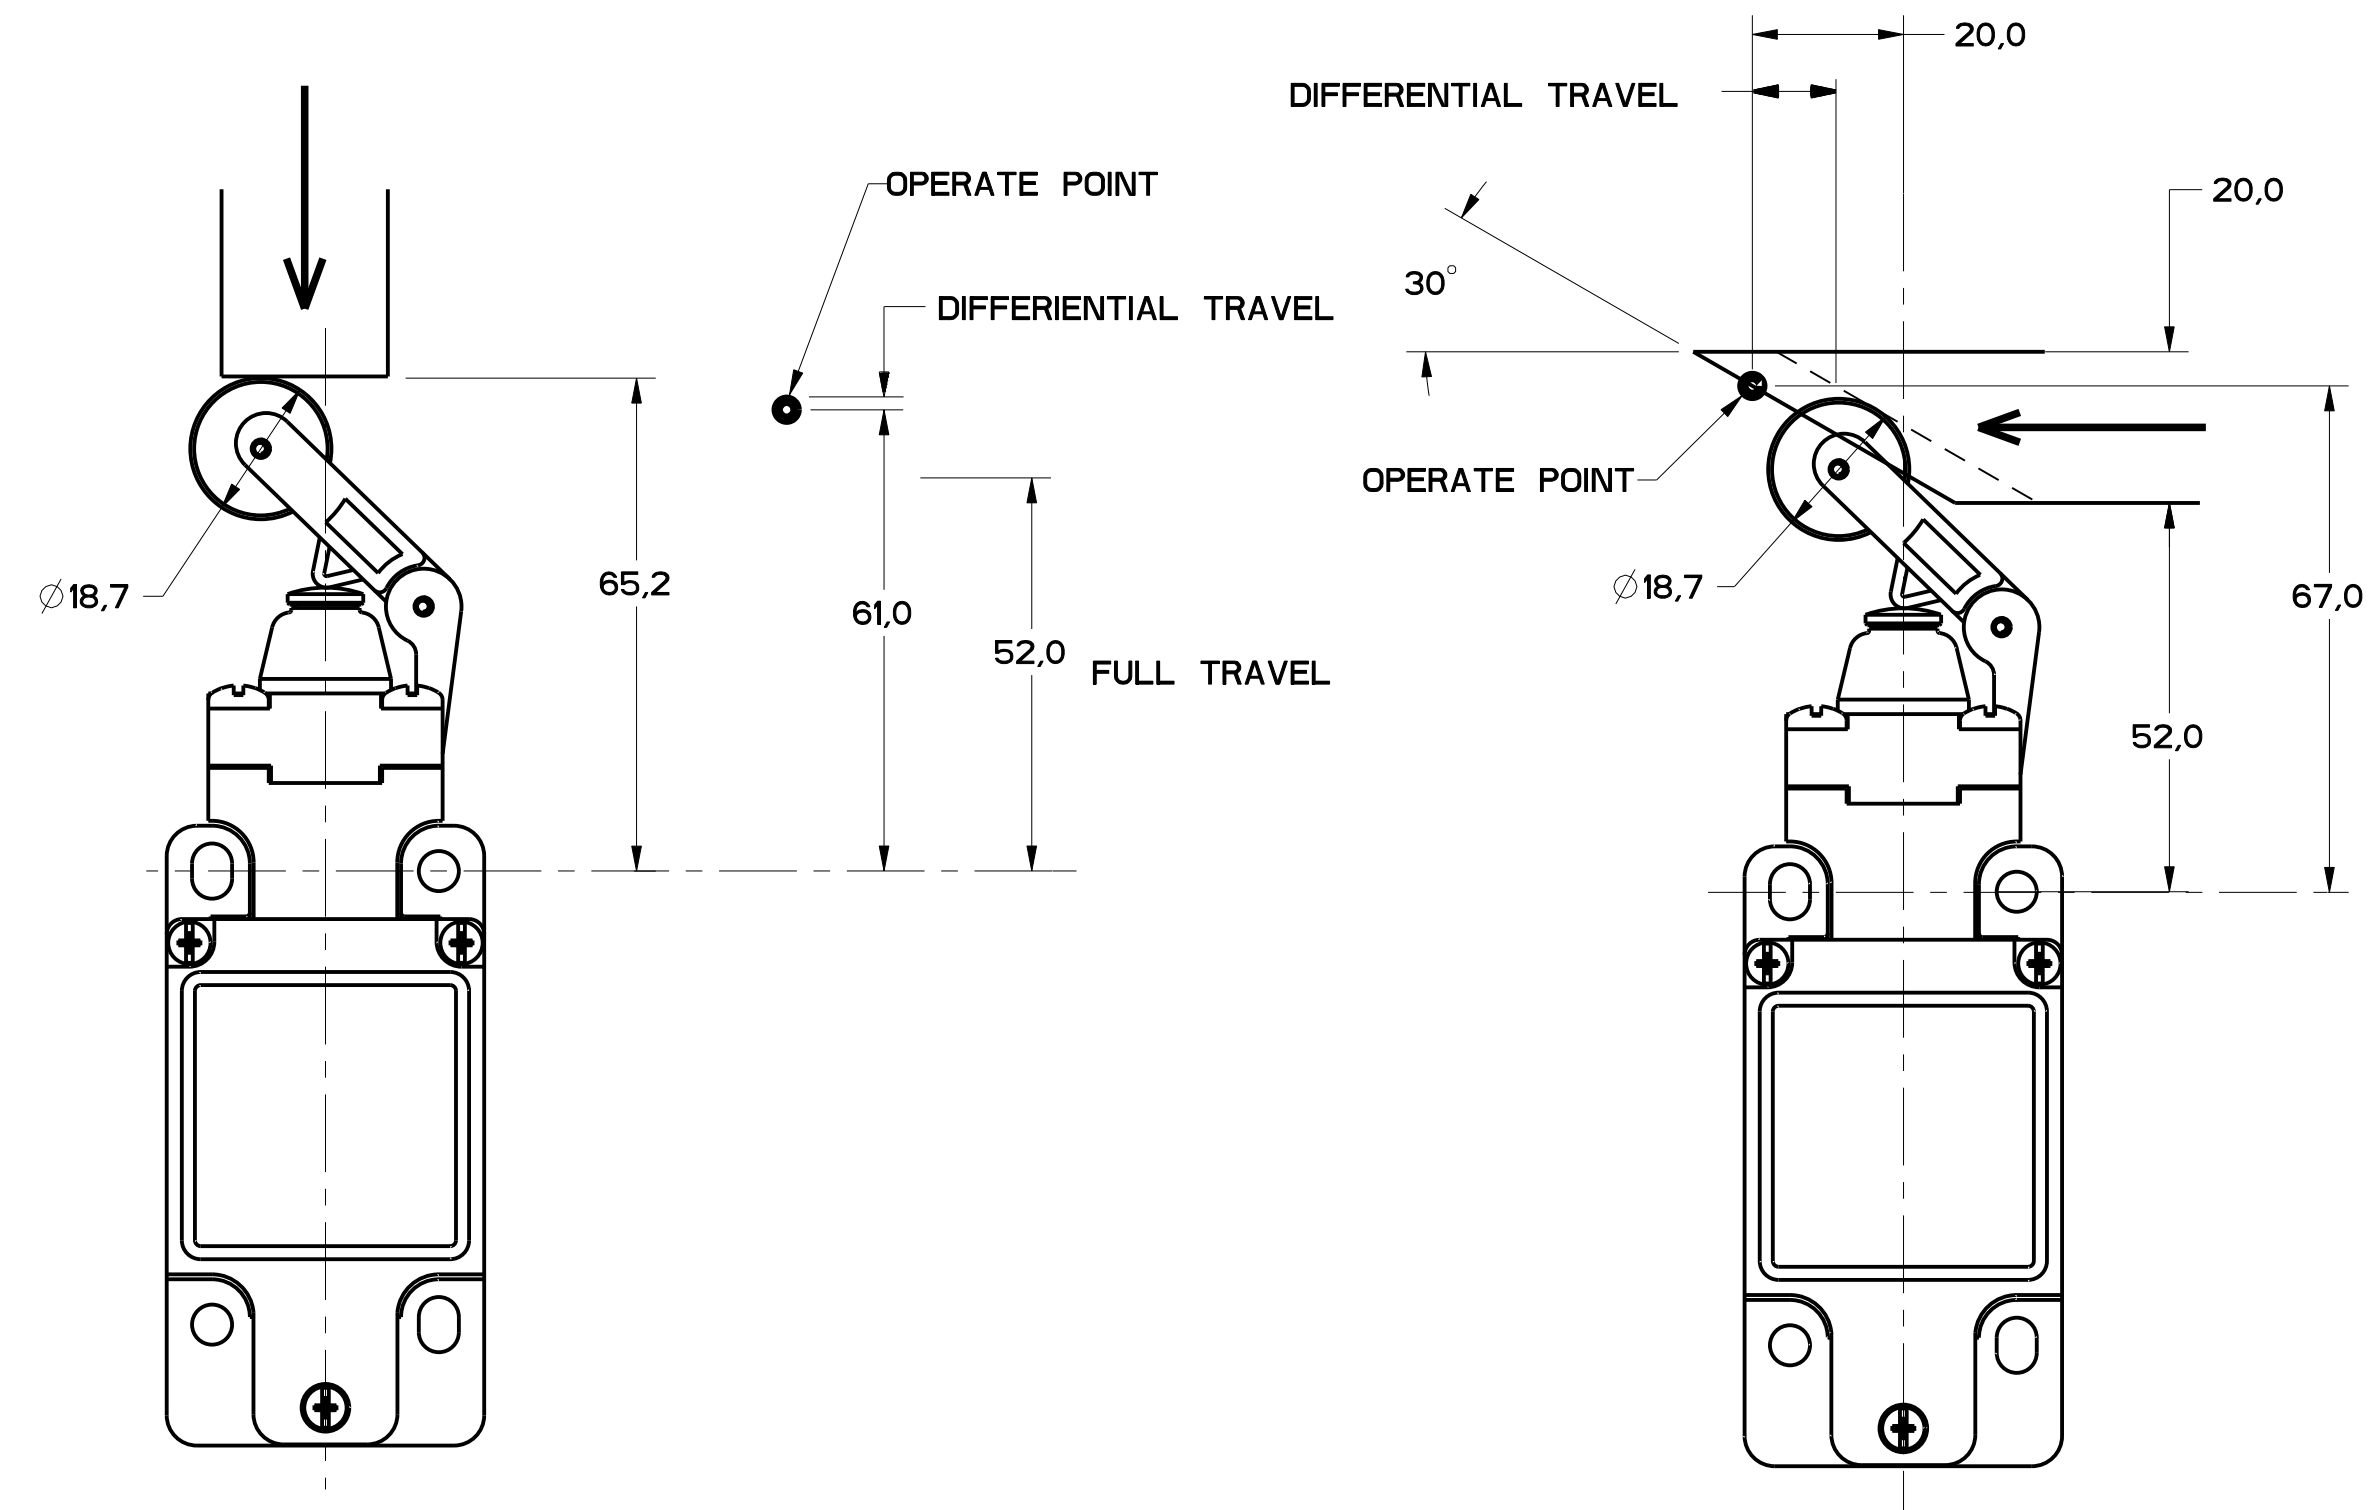


FIGURE 14A

FIGURE 14B

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	0.067 1.7



FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 1.1

THIRD ANGLE PROJECTION
SCALE: FULL
DO NOT SCALE PRINT
TOLERANCES:
APPLY TO DESIGN UNITS; CONVERSIONS ARE ONLY FOR REFERENCE; UNLESS NOTED, TOLERANCES ARE:
DIM TOL DIM TOL
NO PLACES X .04 .2 0.8/.05
ONE PLACE X.X 0.01/.016 0.39/.015
TWO PLACES X.XX 0.15/.008 0.39/.015
THREE PLACES X.XXX 0.13/.005
ANGLES ±Z
DESIGN UNITS: SI METRIC [X] US CUSTOMARY []
WEIGHT



ANSI Y14.5M-1982 APPLIES

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE N-m LB-IN	MAXIMUM DISCONNECT TORQUE N-m LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 		0.1 9	N/A	360	8	100

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL mm/s in/s	MIN OPERATE VEL mm/s in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{.11}{.43}$	100

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

CATALOG LISTING

GL SERIES CHART 2

THIRD ANGLE PROJECTION			
			
SCALE		FULL	
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
DIM mm	TOL mm/16	DIM in	TOL in/16
NO PLACES 2 2 3 XXX	0.15/04 0.40/16 0.17/06	0.1 0.001/013 0.003	0.001/013 0.001/013 0.013/005
$\pm$			
SI METRIC		US CUSTOMARY	
DESIGN UNITS		☒ ☐	