

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

CZ

Chip Type, High Reliability.
Low temperature ESR specification.
series




For SMD

Long Life

Anti-Solvent
Feature

Expanded

- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).






Specifications

Item	Performance Characteristics										
Category Temperature Range	−40 to +125°C										
Rated Voltage Range	10 to 100V										
Rated Capacitance Range	10 to 3300μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3μA, whichever is greater.										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C										
	Rated voltage (V)	10	16	25	35	50	63	80	100		
	tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10		
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.										
Stability at Low Temperature	Rated voltage (V)		10	16	25	35	50	63	80	100	Measurement frequency : 120Hz
	Impedance ratio ZT / Z20 (MAX.)	Z−40°C / Z+20°C	12	8	6	4	4	3	3	3	
	After continuous application of rated voltage at 125°C and then restoring down to 20°C, the readings of measurements shall meet below.										
Endurance	Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16,18 × 16.5L	φ16,18 × 21.5L					
	Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.					
	Capacitance change	Within ±30% of the initial capacitance value									
	tan δ	300% or less than the initial specified value									
	Leakage current	Less than or equal to the initial specified value									
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.					Capacitance change		Within ±10% of the initial capacitance value			
						tan δ		Less than or equal to the initial specified value			
						Leakage current		Less than or equal to the initial specified value			
Marking	Black print on the case top.										


Chip Type

(φ 6.3) 【Standard】 ※ φ6.3 × 5.8L : The vibration structure-resistant product can't support.
φ6.3 × 7.7L : The vibration structure-resistant product is available.

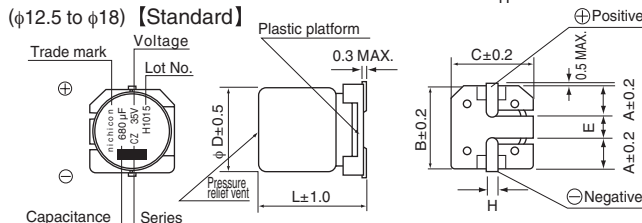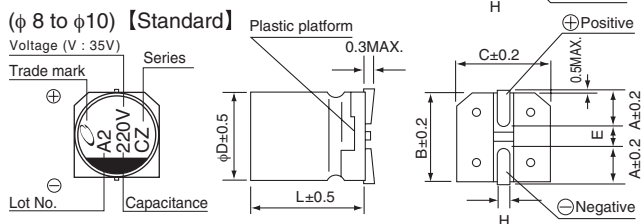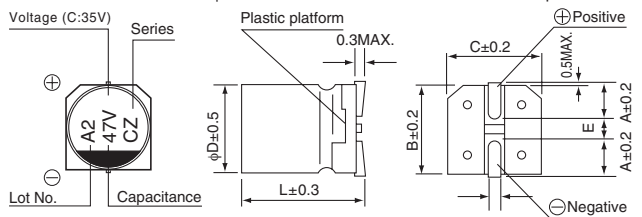


※φ12.5 to φ18 :
The vibration structure-resistant
product is also available upon
request, please ask for details.

Type numbering system (Example : 35V 47μF)

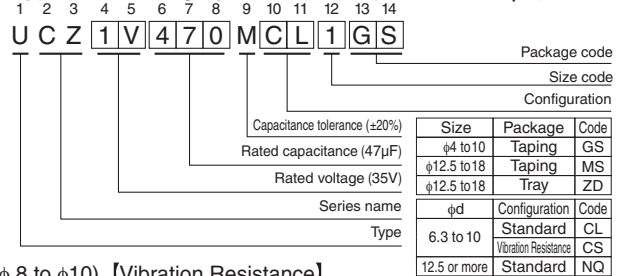

(φ 8 to φ10) 【Vibration Resistance】

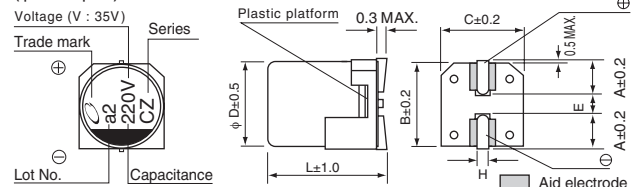

Standard	(mm)										Vibration Resistance (mm)	
	6.3X5.8	6.3X7.7	8X10	10X10	12.5X13.5	16X16.5	16X21.5	18X16.5	18X21.5		8X10	10X10
A	2.4	2.4	2.9	3.2	4.8	5.4	5.4	6.4	6.4	A	2.9	3.2
B	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	B	8.3	10.3
C	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	C	8.3	10.3
E	2.2	2.2	3.1	4.5	4	6.3	6.3	6.3	6.3	E	3.1	4.5
L	5.8	7.7	10	10	13.5	16.5	21.5	16.5	21.5	L	10	10
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	H	1.1 to 1.5	1.1 to 1.5

Rated Voltage								
V	10	16	25	35	50	63	80	100
Code	A	C	E	V	H	J	K	2A

CAT.8100D

■ Dimensions

Cap. (μF)	V Code	10				16				25				35				50												
		1A				1C				1E				1V				1H												
10	100														6.3×5.8	1.60	24	—	69	6.3×5.8	2.80	42	—	51						
22	220														6.3×5.8	1.60	24	—	69	6.3×7.7	0.50	5	40	197						
33	330									6.3×5.8	1.60	24	—	69	6.3×7.7	0.45	5	40	197	●6.3×7.7 8×10	0.50	5	40	197						
47	470									6.3×5.8	1.60	24	—	69	Recommend 35V ➡				●6.3×7.7 8×10	0.45	5	40	197	●6.3×7.7 8×10	0.50	5	40	197		
68	680														8×10	0.20	3	4.5	270											
100	101	Recommend 16V ➡				●6.3×7.7 8×10	0.45	5	40	197	●6.3×7.7 8×10	0.45	5	40	197	8×10	0.20	3	4.5	270	8×10	0.20	3	4.5	270	10×10	0.20	2.5	4.5	500
220	221	8×10	0.20	3	4.5	270	8×10	0.20	3	4.5	270	●8×10 10×10	0.20	3	4.5	270	10×10	0.15	2	3.5	500									
330	331	●8×10 10×10	0.20	3	4.5	270	10×10	0.15	2	3.5	500	10×10	0.15	2	3.5	500														
390	391																													
470	471	10×10	0.15	2	3.5	500	10×10	0.15	2	3.5	500									12.5×13.5	0.060	0.34	2.6	2000	16×16.5	0.080	0.34	2.6	2000	
560	561																			12.5×13.5	0.060	0.40	3.0	1700	16×16.5	0.080	0.34	2.6	2000	
680	681																			12.5×13.5	0.060	0.40	3.0	1700	18×16.5	0.078	0.32	2.6	12100	
820	821																			12.5×13.5	0.060	0.40	3.0	1700	16×16.5	0.047	0.28	1.4	2400	
1000	102																			12.5×13.5	0.060	0.40	3.0	1700	16×16.5	0.047	0.28	1.4	2400	
1200	122																			16×16.5	0.047	0.28	1.4	1700	18×16.5	0.045	0.28	1.4	2600	
1400	142																			16×16.5	0.047	0.28	1.4	2400	18×16.5	0.045	0.28	1.4	2600	
1600	162																			16×16.5	0.047	0.28	1.4	2400	16×21.5	0.034	0.20	0.6	3000	
2200	222																			18×16.5	0.045	0.23	1.3	2600	18×21.5	0.032	0.16	0.5	3250	
2700	272																			16×21.5	0.034	0.20	0.6	3000	Case size φD × L (mm)	Initial 20°C	Initial 40°C	after test 40°C	Rated ripple	
3300	332																			18×21.5	0.032	0.16	0.5	3250						

V Cap. (μF)	Code	63						80						100					
		1J						1K						2A					
10	100	6.3 × 7.7	2.00	100	—	60	8 × 10	0.75	50	—	70	8 × 10	0.75	50	—	70			
22	220	8 × 10	0.70	35	—	100	● 8 × 10	0.75	50	—	70	● 8 × 10	0.75	50	—	70			
							10 × 10	0.55	35	—	115	10 × 10	0.55	35	—	115			
33	330	● 8 × 10	0.70	35	—	100	● 8 × 10	0.75	50	—	70								
		10 × 10	0.50	25	—	170	10 × 10	0.55	35	—	115	10 × 10	0.55	35	—	115			
47	470	● 8 × 10	0.70	35	—	100													
		10 × 10	0.50	25	—	170	10 × 10	0.55	35	—	115								
82	820											12.5×13.5	0.28	1.9	22	700			
150	151	12.5 × 13.5	0.20	1.3	14	1000	12.5 × 13.5	0.28	1.9	14	700	16×16.5	0.19	1.4	4.8	1000			
180	181	12.5 × 13.5	0.20	1.3	14	1000						18×16.5	0.17	1.1	3.9	1100			
220	221	12.5 × 13.5	0.20	1.3	14	1000						16×21.5	0.12	0.8	2.6	1600			
270	271						16 × 16.5	0.19	1.4	4.8	1000								
300	301											18×21.5	0.11	0.7	2.4	1700			
330	331						18 × 16.5	0.17	1.1	3.9	1100								
390	391	16 × 16.5	0.13	0.9	4.8	1900	16 × 21.5	0.12	0.8	2.6	1600								
470	471	18 × 16.5	0.11	0.82	3.9	2000													
520	521						18 × 21.5	0.11	0.7	2.4	1700	Case size φD × L (mm)	Initial 20°C	Initial -40°C	after endurance test 40°C	Rate of ripple			
560	561	16 × 21.5	0.07	0.46	2.0	2500													
750	751	18 × 21.5	0.068	0.44	1.8	2600													
ESR																			

※ Guaranteed time of ESR after endurance test

Size	Guaranteed time
φ6.3 × 5.8L	—
φ6.3 × 7.7L, φ8 × 10L	10 to 50V 2000hrs.
φ10 × 10L	63 to 100V —
φ16, 18 × 16.5L	2000hrs.
φ16, 18 × 21.5L	3000hrs.

Max. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple Current (mA rms) at 125°C 100kHz

● : In this case, [G] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.