THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
J	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	RELEASED(FJ00-1433-01)	23APR01	K.R	S.M
	A	RIVISED(FJ00-0921-02)	25APR02	K.R	S.M
	B	REVISED(FJD0-0123-03)	01AUG03	K.R	S.M

-2 : AS SHOWN
-2 : 本図

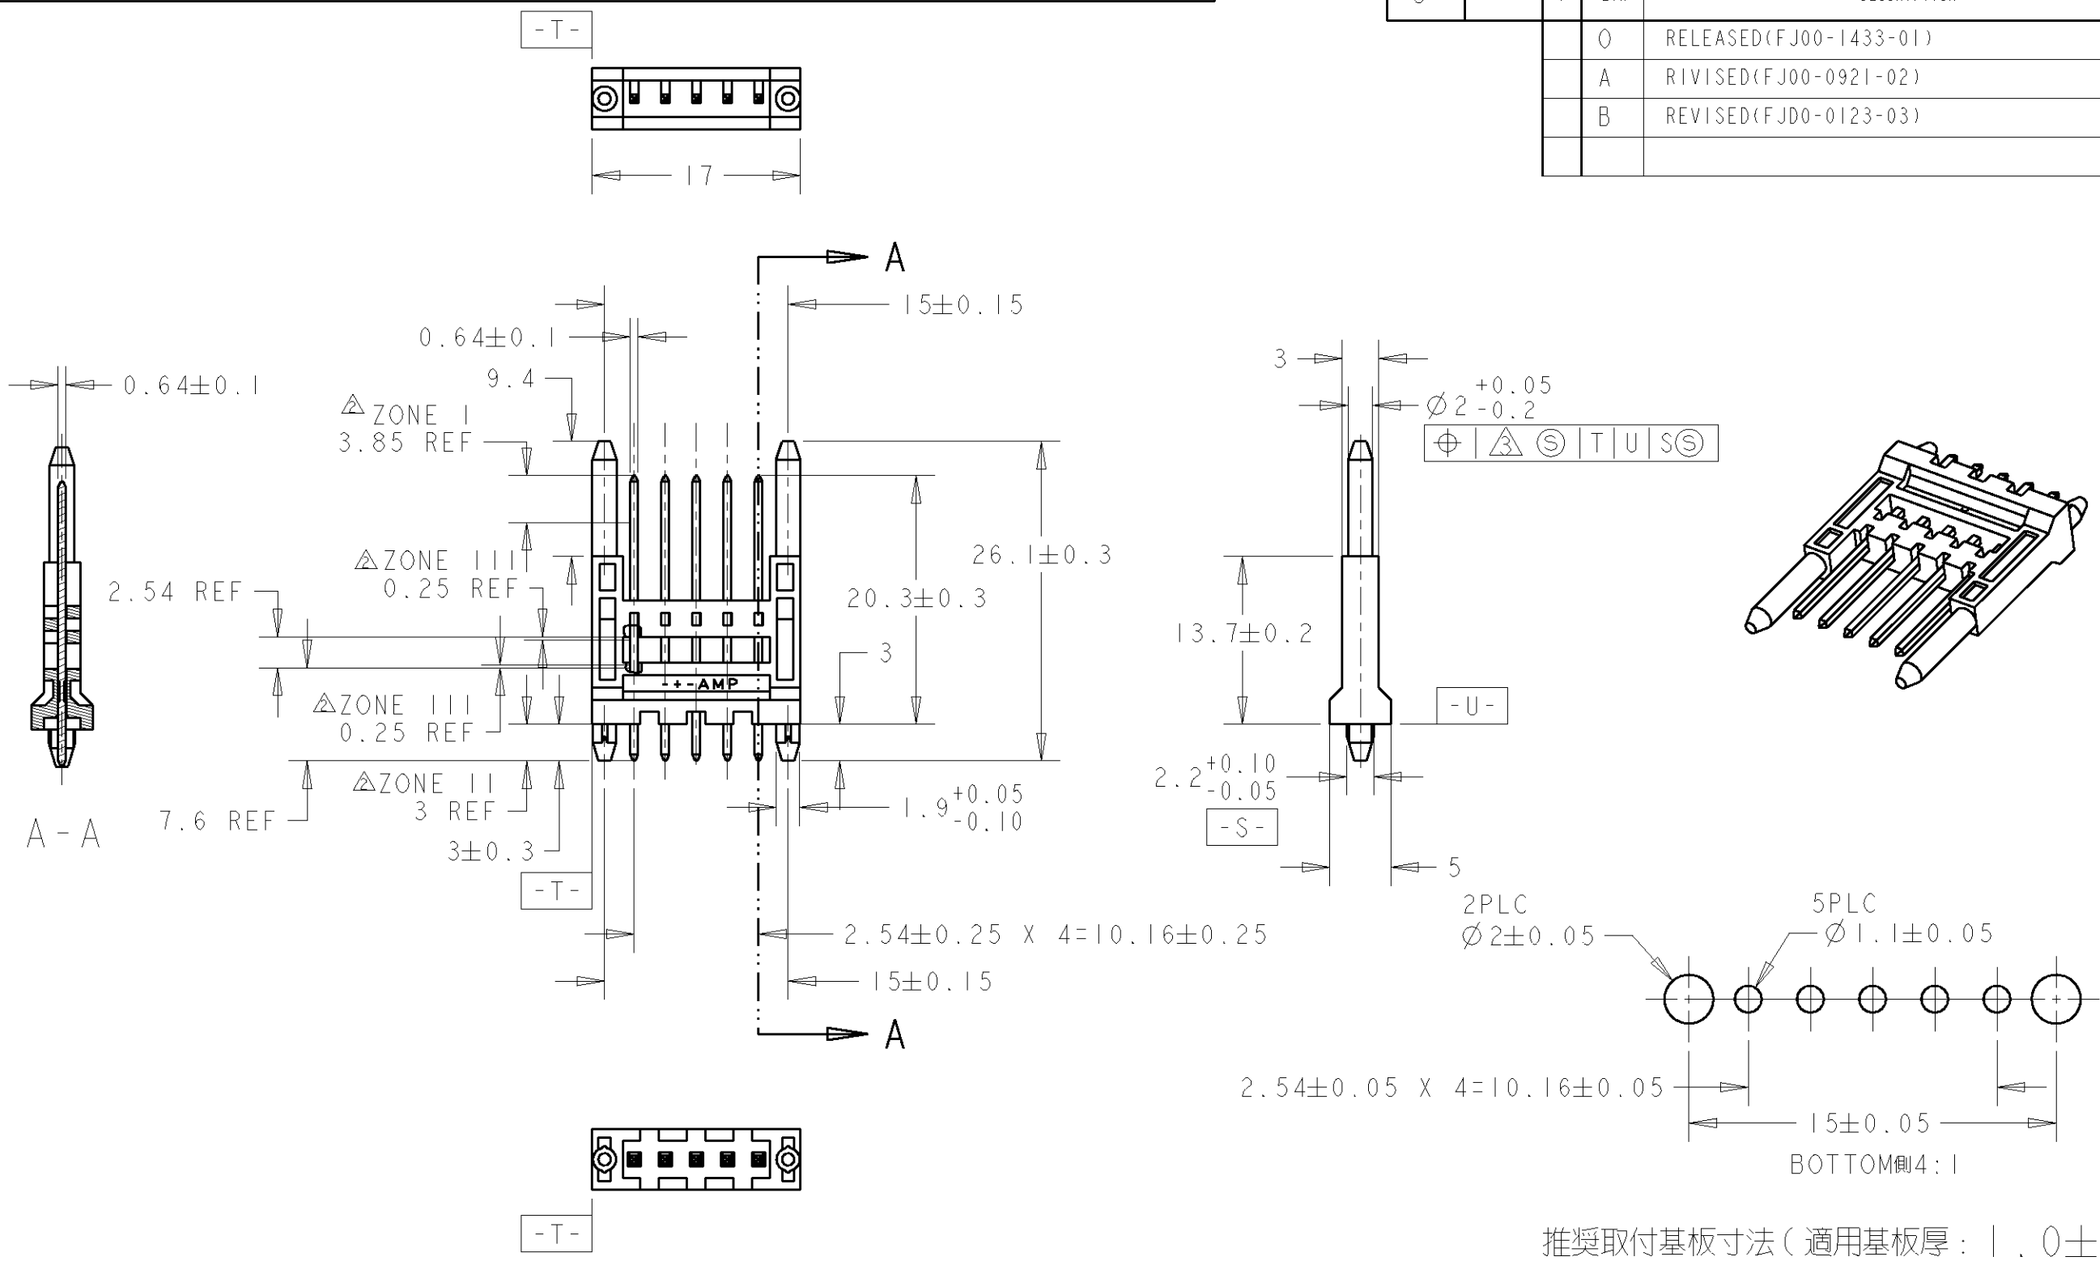

推奨取付基板寸法(適用基板厚:1.0±0.15)
RECOMMENDED P.C.BOARD LAYOUT(BOARD THICKNESS:1.0±0.15)

△1 材料 ハウジング:ガラス入り熱可塑性ポリエステル(UL94V-0)、色:黒
コンタクト:黄銅
△2 仕上げ 全面:ニッケルめっき下地 1.27μm以上
接触部(ZONE I):金めっき 0.2μm以上
基板取付部(ZONE II):錫めっき 2μm以上
非めっき部(ZONE III)
△3 AMPマーク側:1.76 , キャビティマーク側:0.4

△1 MATERIAL HOUSING;POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0), COLOR;BLACK
CONTACT;BRASS
△2 FINISH UNDER:Ni PLATING ALL SURFACE 1.27μm MIN
CONTACT AREA(ZONE I):Au PLATING 0.2μm MIN
P.C.BOARD ATTACHMENT AREA(ZONE II):TIN PLATING 2μm MIN
NOT PLATED AREA(ZONE III)
△3 AMP MARK SIDE:1.76 , CAVITY MARK SIDE:0.4

AMP 1470-19 REV 31MAR2000

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0.3
1 PLC	±0.25
2 PLC	±0.2
3 PLC	±-
4 PLC	±-
ANGLES	±-

MATERIAL SEE NOTE △1
FINISH SEE NOTE △2

DWN	K.RIKU	23APR01
CHK	S.MANABE	23APR01
APVD	S.MANABE	23APR01
PRODUCT SPEC	108-5727	
APPLICATION SPEC	-	
WEIGHT	1.14g	

CUSTOMER DRAWING

tyco Electronics
Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
BE CONN. POST HEADER ASSY
(13.7mm HEIGHT)
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1376778	-

SCALE 2:1 SHEET 1 OF 1 REV B

Pro/ENGINEER DRAWING