



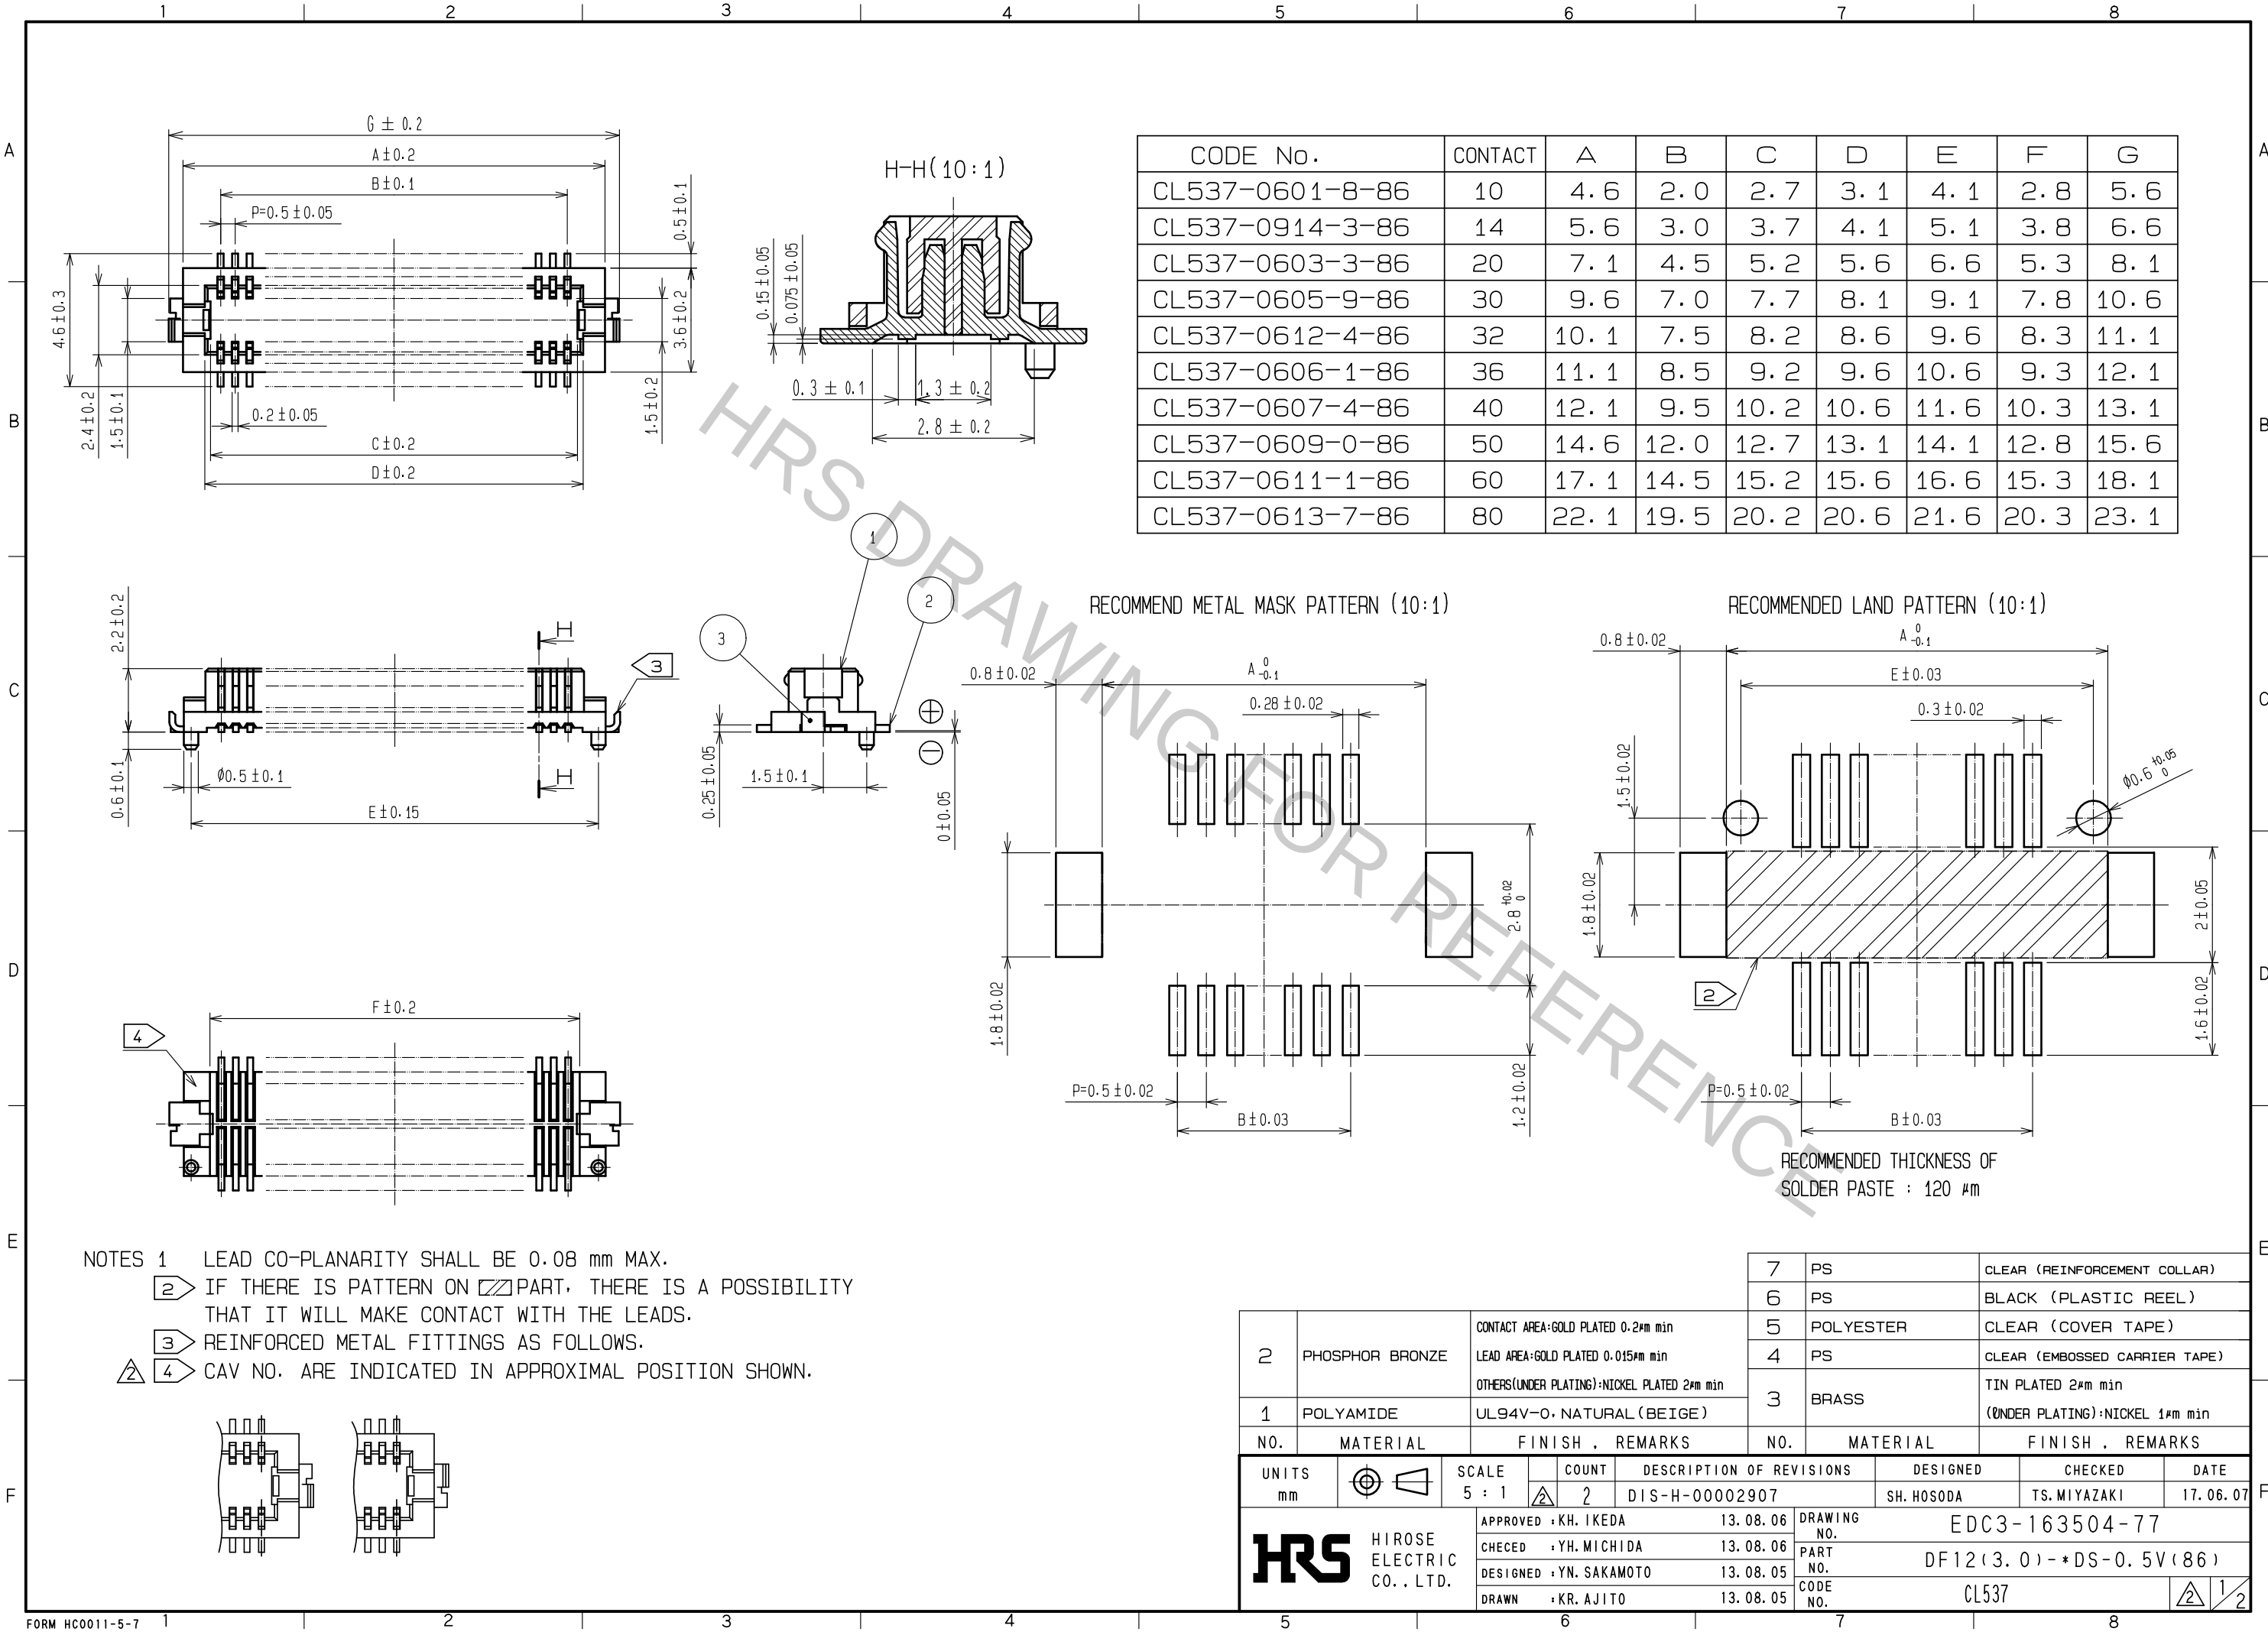

CODE No.	CONTACT	A	B	C	D	E	F	G
CL537-0601-8-86	10	4.6	2.0	2.7	3.1	4.1	2.8	5.6
CL537-0914-3-86	14	5.6	3.0	3.7	4.1	5.1	3.8	6.6
CL537-0603-3-86	20	7.1	4.5	5.2	5.6	6.6	5.3	8.1
CL537-0605-9-86	30	9.6	7.0	7.7	8.1	9.1	7.8	10.6
CL537-0612-4-86	32	10.1	7.5	8.2	8.6	9.6	8.3	11.1
CL537-0606-1-86	36	11.1	8.5	9.2	9.6	10.6	9.3	12.1
CL537-0607-4-86	40	12.1	9.5	10.2	10.6	11.6	10.3	13.1
CL537-0609-0-86	50	14.6	12.0	12.7	13.1	14.1	12.8	15.6
CL537-0611-1-86	60	17.1	14.5	15.2	15.6	16.6	15.3	18.1
CL537-0613-7-86	80	22.1	19.5	20.2	20.6	21.6	20.3	23.1



NOTES 1 LEAD CO-PLANARITY SHALL BE 0.08 mm MAX.
2 IF THERE IS PATTERN ON  PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE LEADS.
3 REINFORCED METAL FITTINGS AS FOLLOWS.
4 CAV NO. ARE INDICATED IN APPROXIMAL POSITION SHOWN.



2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2 μ m min LEAD AREA:GOLD PLATED 0.015 μ m min OTHERS(UNDER PLATING):NICKEL PLATED 2 μ m min	7	PS	CLEAR (REINFORCEMENT COLLAR)
1	POLYAMIDE	UL94V-0, NATURAL (BEIGE)	6	PS	BLACK (PLASTIC REEL)
NO. MATERIAL		FINISH, REMARKS	NO. MATERIAL		FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 2		DESCRIPTION OF REVISIONS DIS-H-00002907
APPROVED : KH. IKEDA		13.08.06	DESIGNED SH. HOSODA		CHECKED TS. MIYAZAKI
CHECED : YH. MICHIDA		13.08.06	DRAWING NO. EDC3-163504-77		DATE 17.06.07
DESIGNED : YN. SAKAMOTO		13.08.05	PART NO. DF12(3.0)-*DS-0.5V(86)		
DRAWN : KR. AJITO		13.08.05	CODE NO. CL537		

HRS	DRAWING NO. EDC3-163504-77	
	PART NO. DF12(3.0)-*DS-0.5V(86)	
	CODE NO. CL537	$\triangle$ 2 / 2

NOTES 5 1 REEL 1000 CONNECTORS.
6 AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
7 WHEN THE TAPE WIDTH IS 32 mm OR 44 mm, SPROCKET HOLES SHALL BE SET ON
BOTH SIDE OF REEL AS SHOWN ON THIS DRAWING.
8 PEEL FORCE REFERS TO JIS C 0806. (IEC 60286-3)
9 THE REEL IS PACKED WITH A POLYETHYLENE MATERIAL,
TOGETHER WITH A DRYING AGENT.
10 AFTER PACKING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER
CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

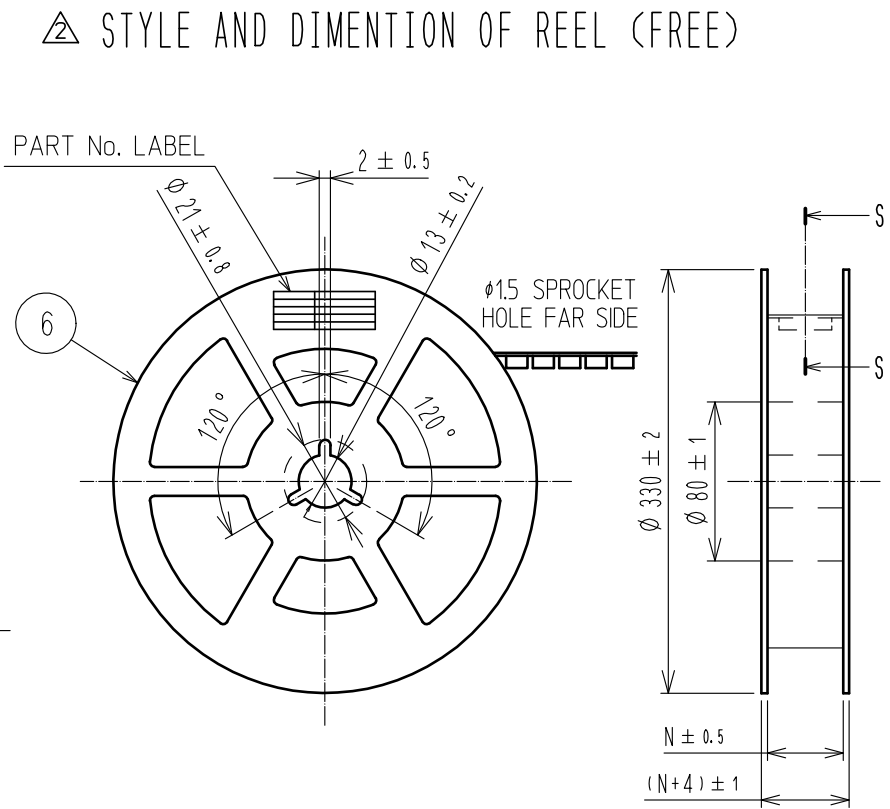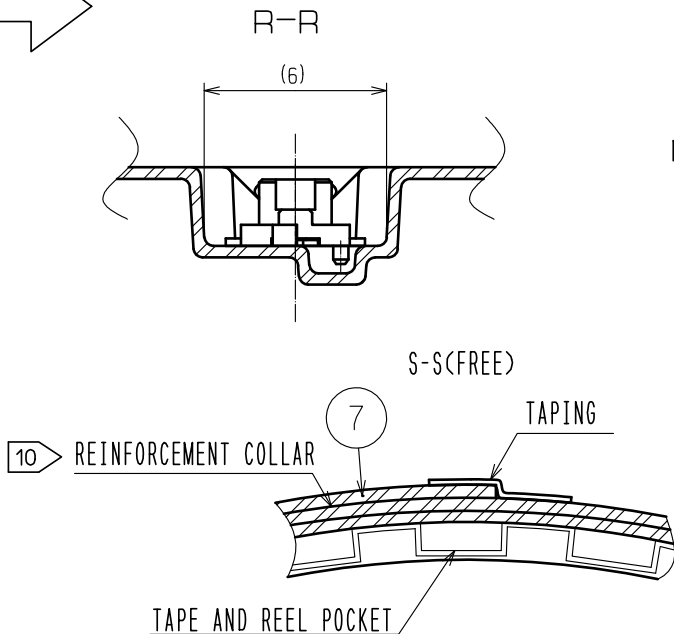

SUPPLIER
QUANTITY
PART No.
CODE No.
DATE OF MANUFACTURED

DETAIL OF PART No. LABEL

生産月日	年 月 日
図番	CL537-*****-*-86
品名	DF12(3.0)-*DS-0.5V(86)
納入数量	1000K口
納入者	ヒロセ電機(株)