

W53SF4BT


Features

- MECHANICALLY AND SPECTRALLY MATCHED TO THE W51P3C PHOTOTRANSISTOR.
- BOTH WATER CLEAR LENS AND BLUE TRANSPARENT LENS AVAILABLE

Description

SF4 Made with Gallium Aluminum Arsenide Infrared Emitting diodes.

Package Dimensions

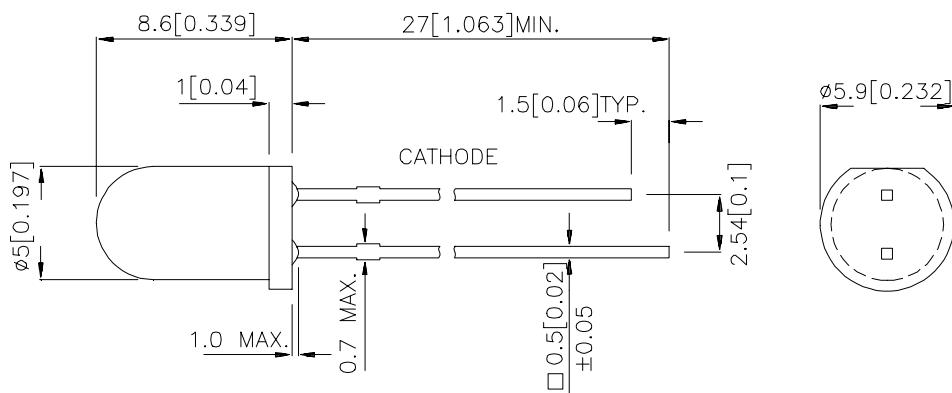

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 (0.01") unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Po(mW/sr) @ 20 mA *50mA		Viewing Angle
			Min.	Typ.	
W53SF4BT	GaAlAs	BLUE TRANSPARENT	4	20	20°
			*7	*30	20°

Notes:

1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. * Luminous intensity with asterisk is measured at 50mA.

Electrical / Optical Characteristics at $T_A=25^\circ C$


Parameter	P/N	Symbol	Typ.	Max.	Unit	Condition
Forward Voltage	SF4	V_F	1.3	1.6	V	$I_F=20mA$
Reverse Current	SF4	I_R	-	10	uA	$V_R=5V$
Capacitance	SF4	C	90	-	pF	$V_F=0V; f=1MHz$
Wavelength at peak emission	SF4	λ_P	880	-	nm	$I_F=20mA$
Spectral line half-width	SF4	$\Delta\lambda_{1/2}$	50	-	nm	$I_F=20mA$

Absolute Maximum Ratings at $T_A=25^\circ C$

Item	Symbol	SF4	Units
Power Dissipation	P_T	100	mW
Forward Current	I_F	50	mA
Peak Forward Current[1]	i_{FS}	1.2	A
Reverse Voltage	V_R	5	V
Operating Temperature	T_A	-40~+85	°C
Storage Temperature	T_{STG}	-40~+85	°C
Lead Solder Temperature[2]		260°C For 5 Seconds	

Notes:

1. 1/100 Duty Cycle, 10us Pulse Width.
2. 2mm below package base.

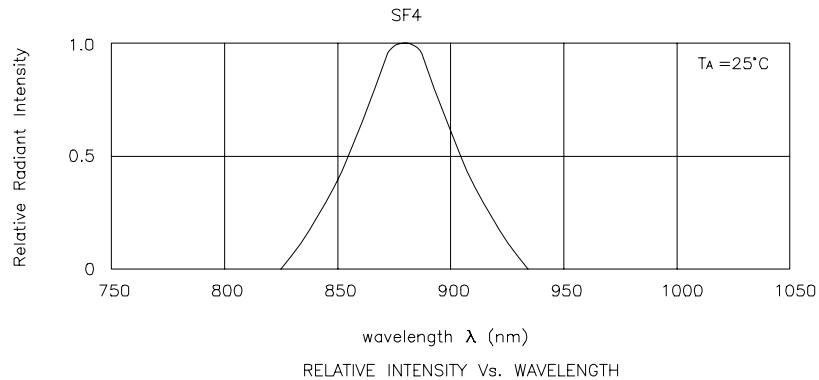

W53SF4BT

