



Tous droits strictement reserves. Reproduction ou communication a des tiers int
sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Droits de reproduction BERG ELECTRONICS by

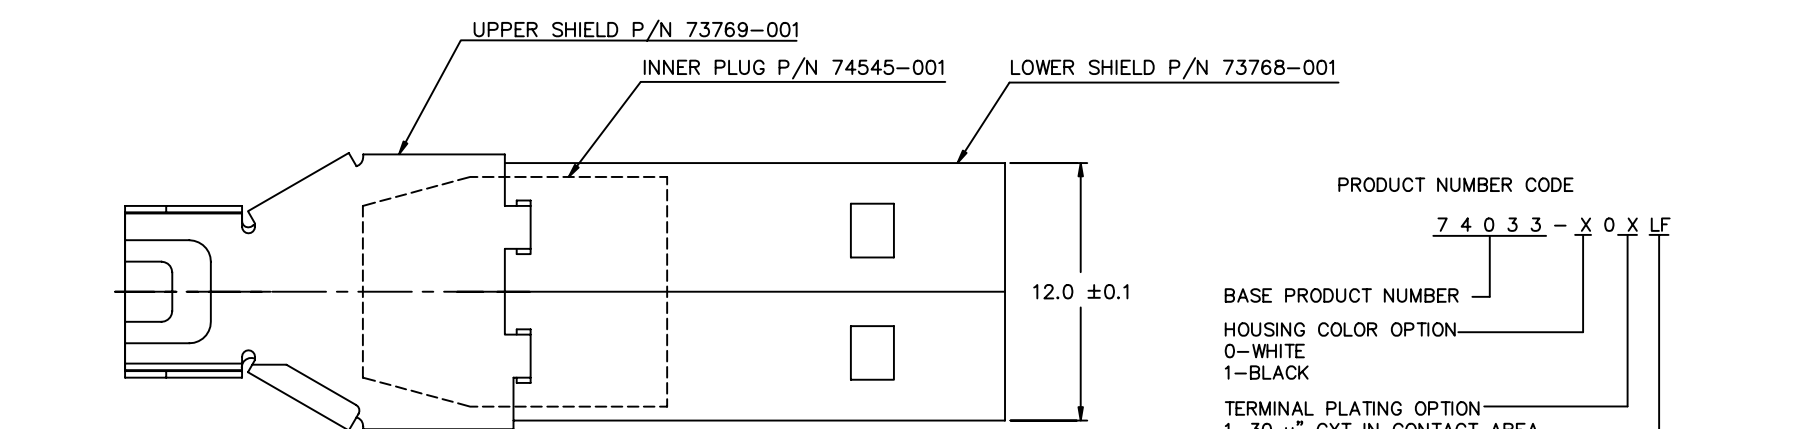

All rights strictly reserved. Reproduction or issue to third parties in any for
without written authority from the proprietor.
Property of c BERG ELECTRONICS.
Copyright BERG ELECTRONICS by

PRODUCT NO.
74033

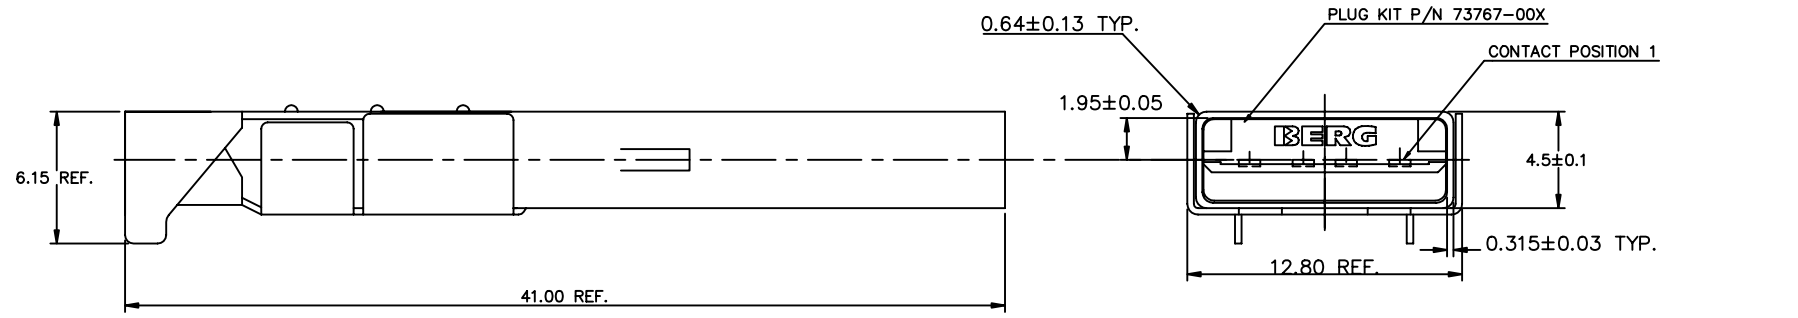

PRODUCT NUMBER CODE
7 4 0 3 3 - X 0 X LF

BASE PRODUCT NUMBER
HOUSING COLOR OPTION
0-WHITE
1-BLACK

TERMINAL PLATING OPTION
1-30 u" GXT IN CONTACT AREA
100u" TIN/LEAD IN SOLDER AREA
3-30 u" Au IN CONTACT AREA
100u" TIN/LEAD IN SOLDER AREA

LEAD FREE OPTION
IF LEAD FREE OPTION SELECTED, THE TIN/LEAD
PLATING WERE REPLACED BY PURE TIN

- NOTES:
- 1.MATERIAL:
SHIELD: SPCC
CONTACTS :COPPER ALLOY
HOUSING :UL 94V-0 THERMOPLASTIC COLOR:SEE PRODUCT NUMBER CODE
 - 2.CONTACT PLATING : SEE PRODUCT NUMBER CODE
 - 3.SHIELD PLATING : 2.5 um MINIMUM NICKEL.
 - 4.PRINT IS ONLY FOR ASSEMBLY REFERENCE
 6. PACKING STANDARD GS-14-920 WILL BE APPLIED FOR LEAD FREE P/N'S
 7. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
 8. FOR LEAD FREE P/N'S, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A HAND SOLDERING OR WAVE SOLDERING PROCESS.

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com						
rev.	ecn no.	dr	date	linear	.0 ± 0.3		projection 	title USB A TYPE PLUG KIT SUB-ASS'Y	product family USB	code				
A	T70418	P P	10/06/97		.00 ± 0.20									
B	T80026	P P	01/20/98		.000± 0.10									
C	T80068	P P	02/16/98	angles	± 2°									
D	T80388	P P	08/27/98	dr	PETER	08/14/97					unit	mm	size	dwg no.
E	T80579	P P	12/21/98	engr	R Y LIU	08/14/97					scale 4 : 1			
F	N05-0247	P H	08/30/05	chr	R Y LIU	08/14/97								
G	N08-0162	R.B	2008/08/08	appd	JENN TSAO	08/14/97								
sheet		revision		G										
index		sheet		1										