


SPECIFICATIONS		
SILIKROME®	GRADE	
	COMMERCIAL	MILITARY
Material	Silicone Rubber ASTM D 1418	Silicone Rubber conforming toA-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

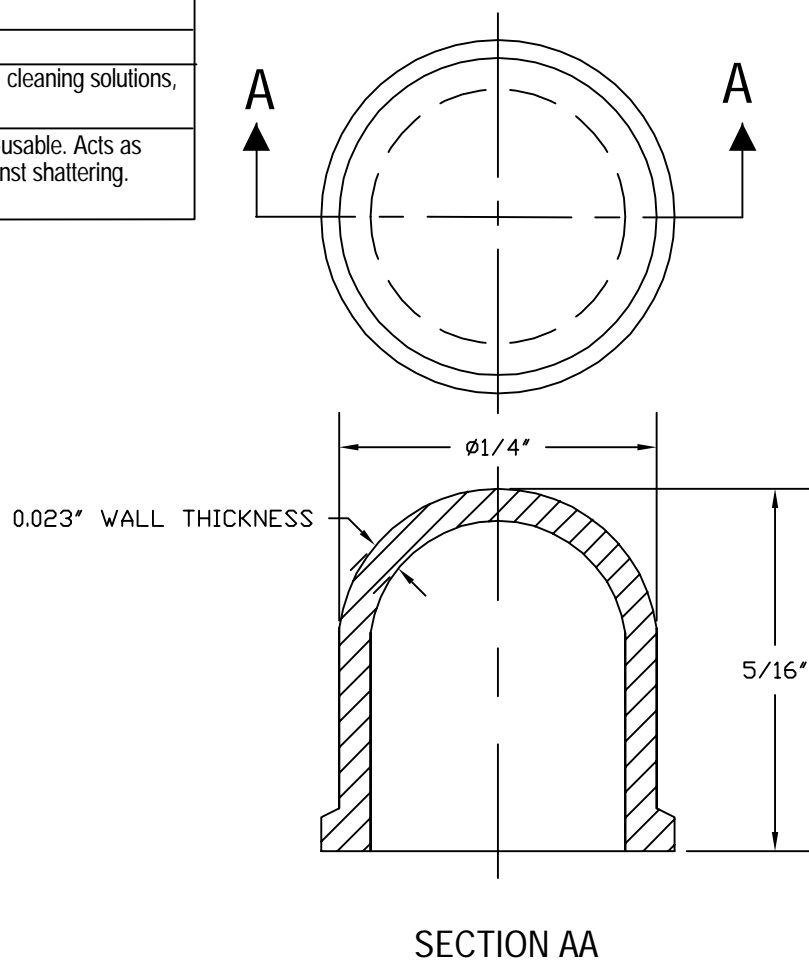

NOTE:  
ALL DIMENSIONS ARE  
REFERENCE ONLY

B	REDRAWN and MAT'L CHANGED		S. GOK	05.28.09
A	CAD COMPUTER GENERATED			01.10.03
REV.	DESCRIPTION			DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE	SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-1 3/4 LAMPS	ENG.	S. GOK 05.28.09
			DWN.	ED 09.26.62
			CHKD.	J. CELLA 05.28.09
MAT'L: SEE ABOVE	APM-HEXSEAL CORPORATION	SCALE 6 : 1	DWG. NO. 1813/2	
COLOR: SPECIFY				

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.  
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## APM HEXSEAL:

[1813/2](#) [1813/2 A2 C](#) [1813/2 B1 C](#) [1813/2 G1 C](#) [1813/2 LW1 C](#) [1813/2 R1 C](#) [1813/2 Y1 C](#)