


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	DWN
						APVD
		G2		REVISED PER ECO-11-004820	11MAR11	RK
						HMR

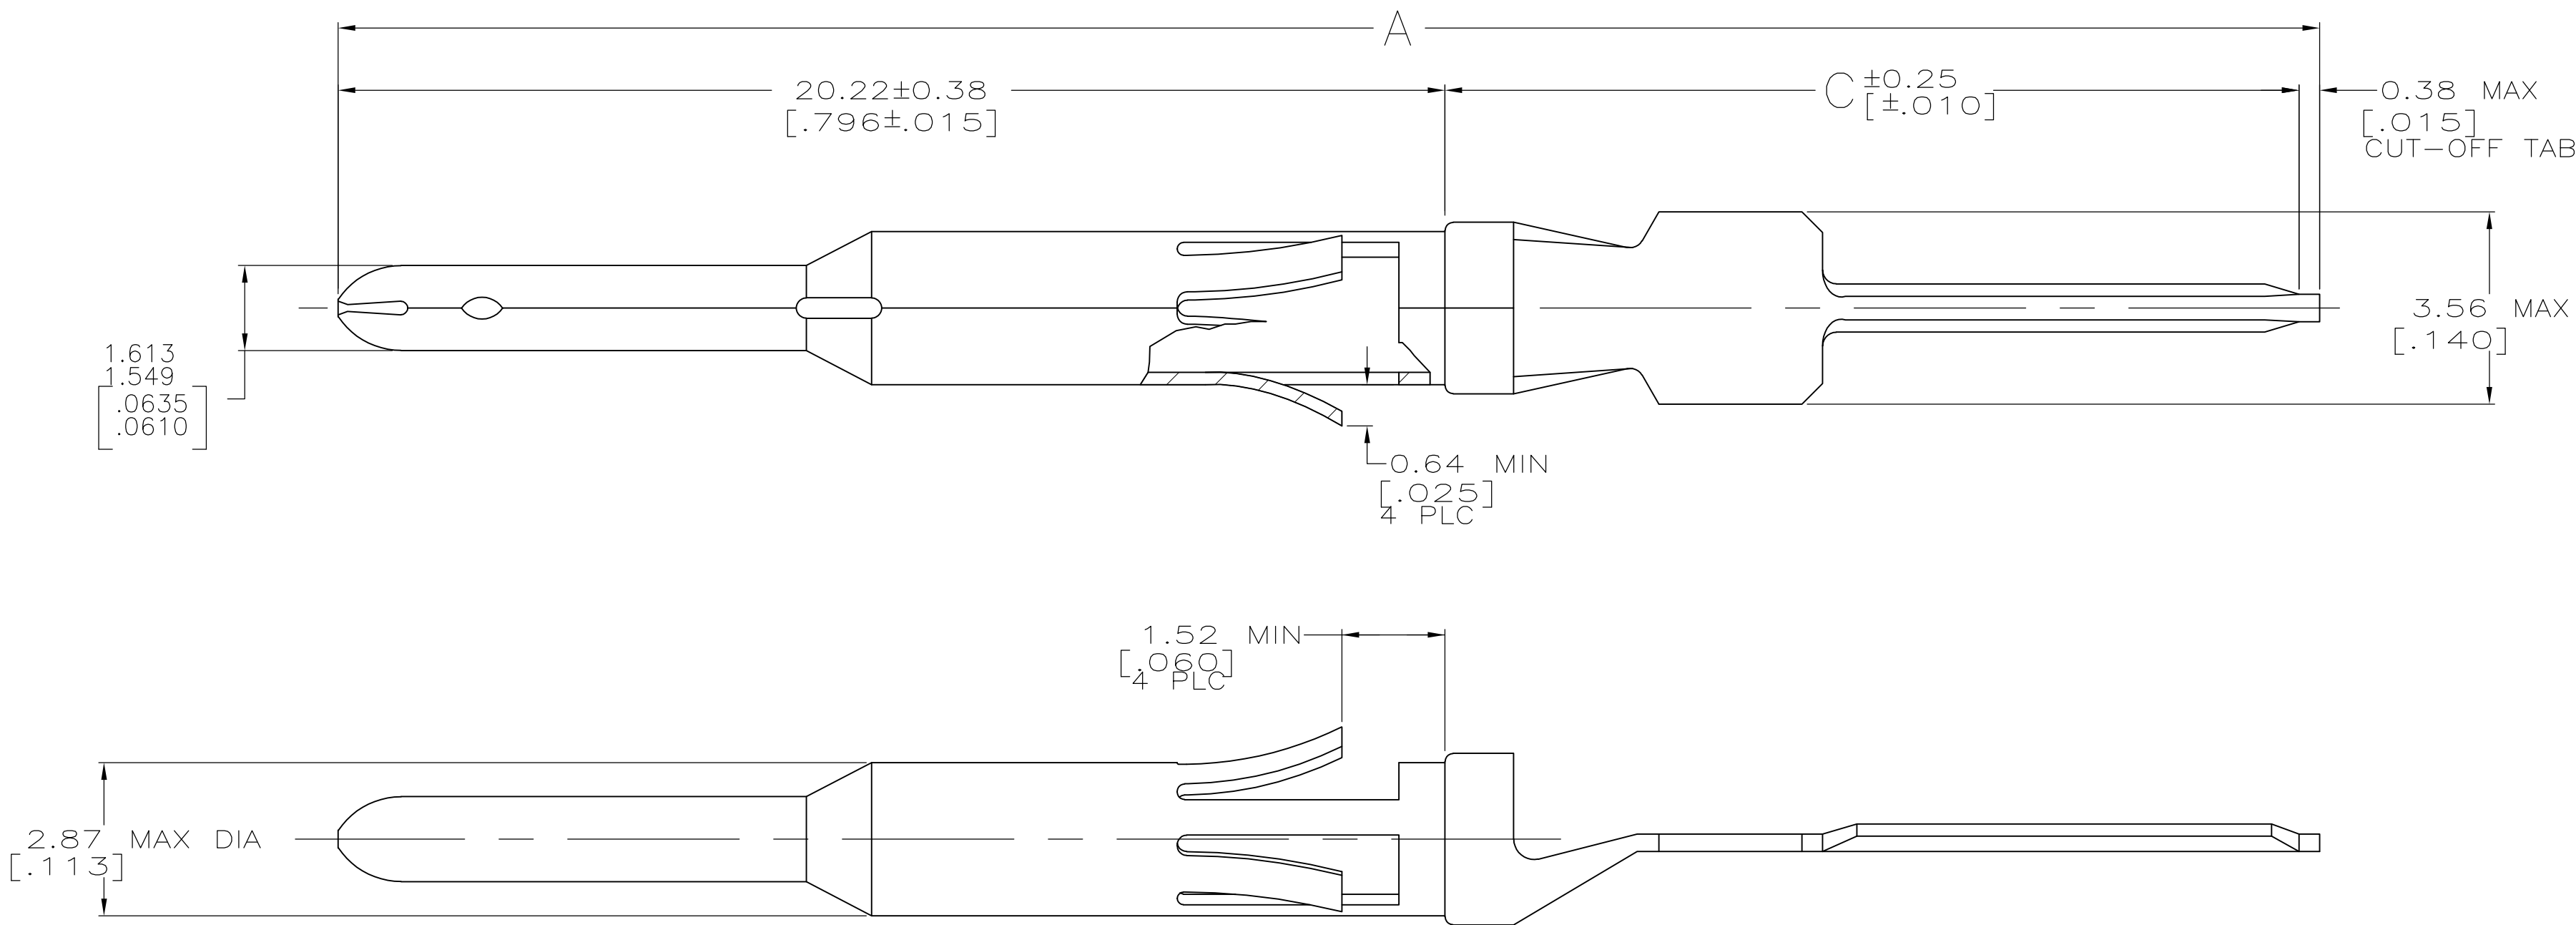

1. BRASS PER MIL-C-50.
2. 0.76um [0.00030] MIN GOLD FOR A LENGTH OF 3.81 [0.150] MIN ON CONTACT END, 1.27um [0.00050] MIN TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um [0.00050] MIN NICKEL ON ENTIRE CONTACT.
3. GOLD PLATING PER MIL-G-45204; TIN PLATING PER MIL-T-10727; NICKEL PLATING PER QQ-N-290.
4. 0.76um [0.00030] MIN GOLD FOR A LENGTH OF 3.81 [0.150] MIN ON CONTACT END, 1.27um [0.00050] MIN TIN ON OPPOSITE END, BOTH OVER 1.27um [0.00050] MIN NICKEL ON ENTIRE CONTACT.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5	OBSOLETE	25.91 [1.020]	46.51 [1.831]	2-66730-1
5	OBSOLETE	21.11 [.831]	41.71 [1.642]	1-66730-9
5	OBSOLETE	15.80 [.622]	36.40 [1.433]	1-66730-7
		25.91 [1.020]	46.51 [1.831]	66730-9
		21.11 [.831]	41.71 [1.642]	66730-6
		15.80 [.622]	36.40 [1.433]	66730-3
		C	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	07/09/92	TE Connectivity	
		CHK	7-10-92		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		CONTACT, PIN, TYPE VI, POSTED	
				-	
MATERIAL		WEIGHT		SIZE	RESTRICTED TO
				A2	-
		CUSTOMER DRAWING		CAGE CODE	REV
				00779	G2
				DRAWING NO	
				C-66730	
				SCALE	SHEET
				10:1	1 OF 1