

BZH1-2RN2

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. DR-365-1

CHECK

REVISIONS

A	PR-1342	L S D	2 JUL 70	5 MAR 70
B	CO28612	M B S	11 FEB 71	W H E
C	CO37675	K P K	23 SEP 76	W H E
D	CO55989	W J M	1 NOV 84	W H E
E	CO72977	J A K	11 MAR 97	W H E
F	CO77179	MAM	12 MAR 94	W H E
G	CO81513B	J A K	11 MAR 97	W H E


CHECK

CHECK

CHECK

CHECK

CHECK

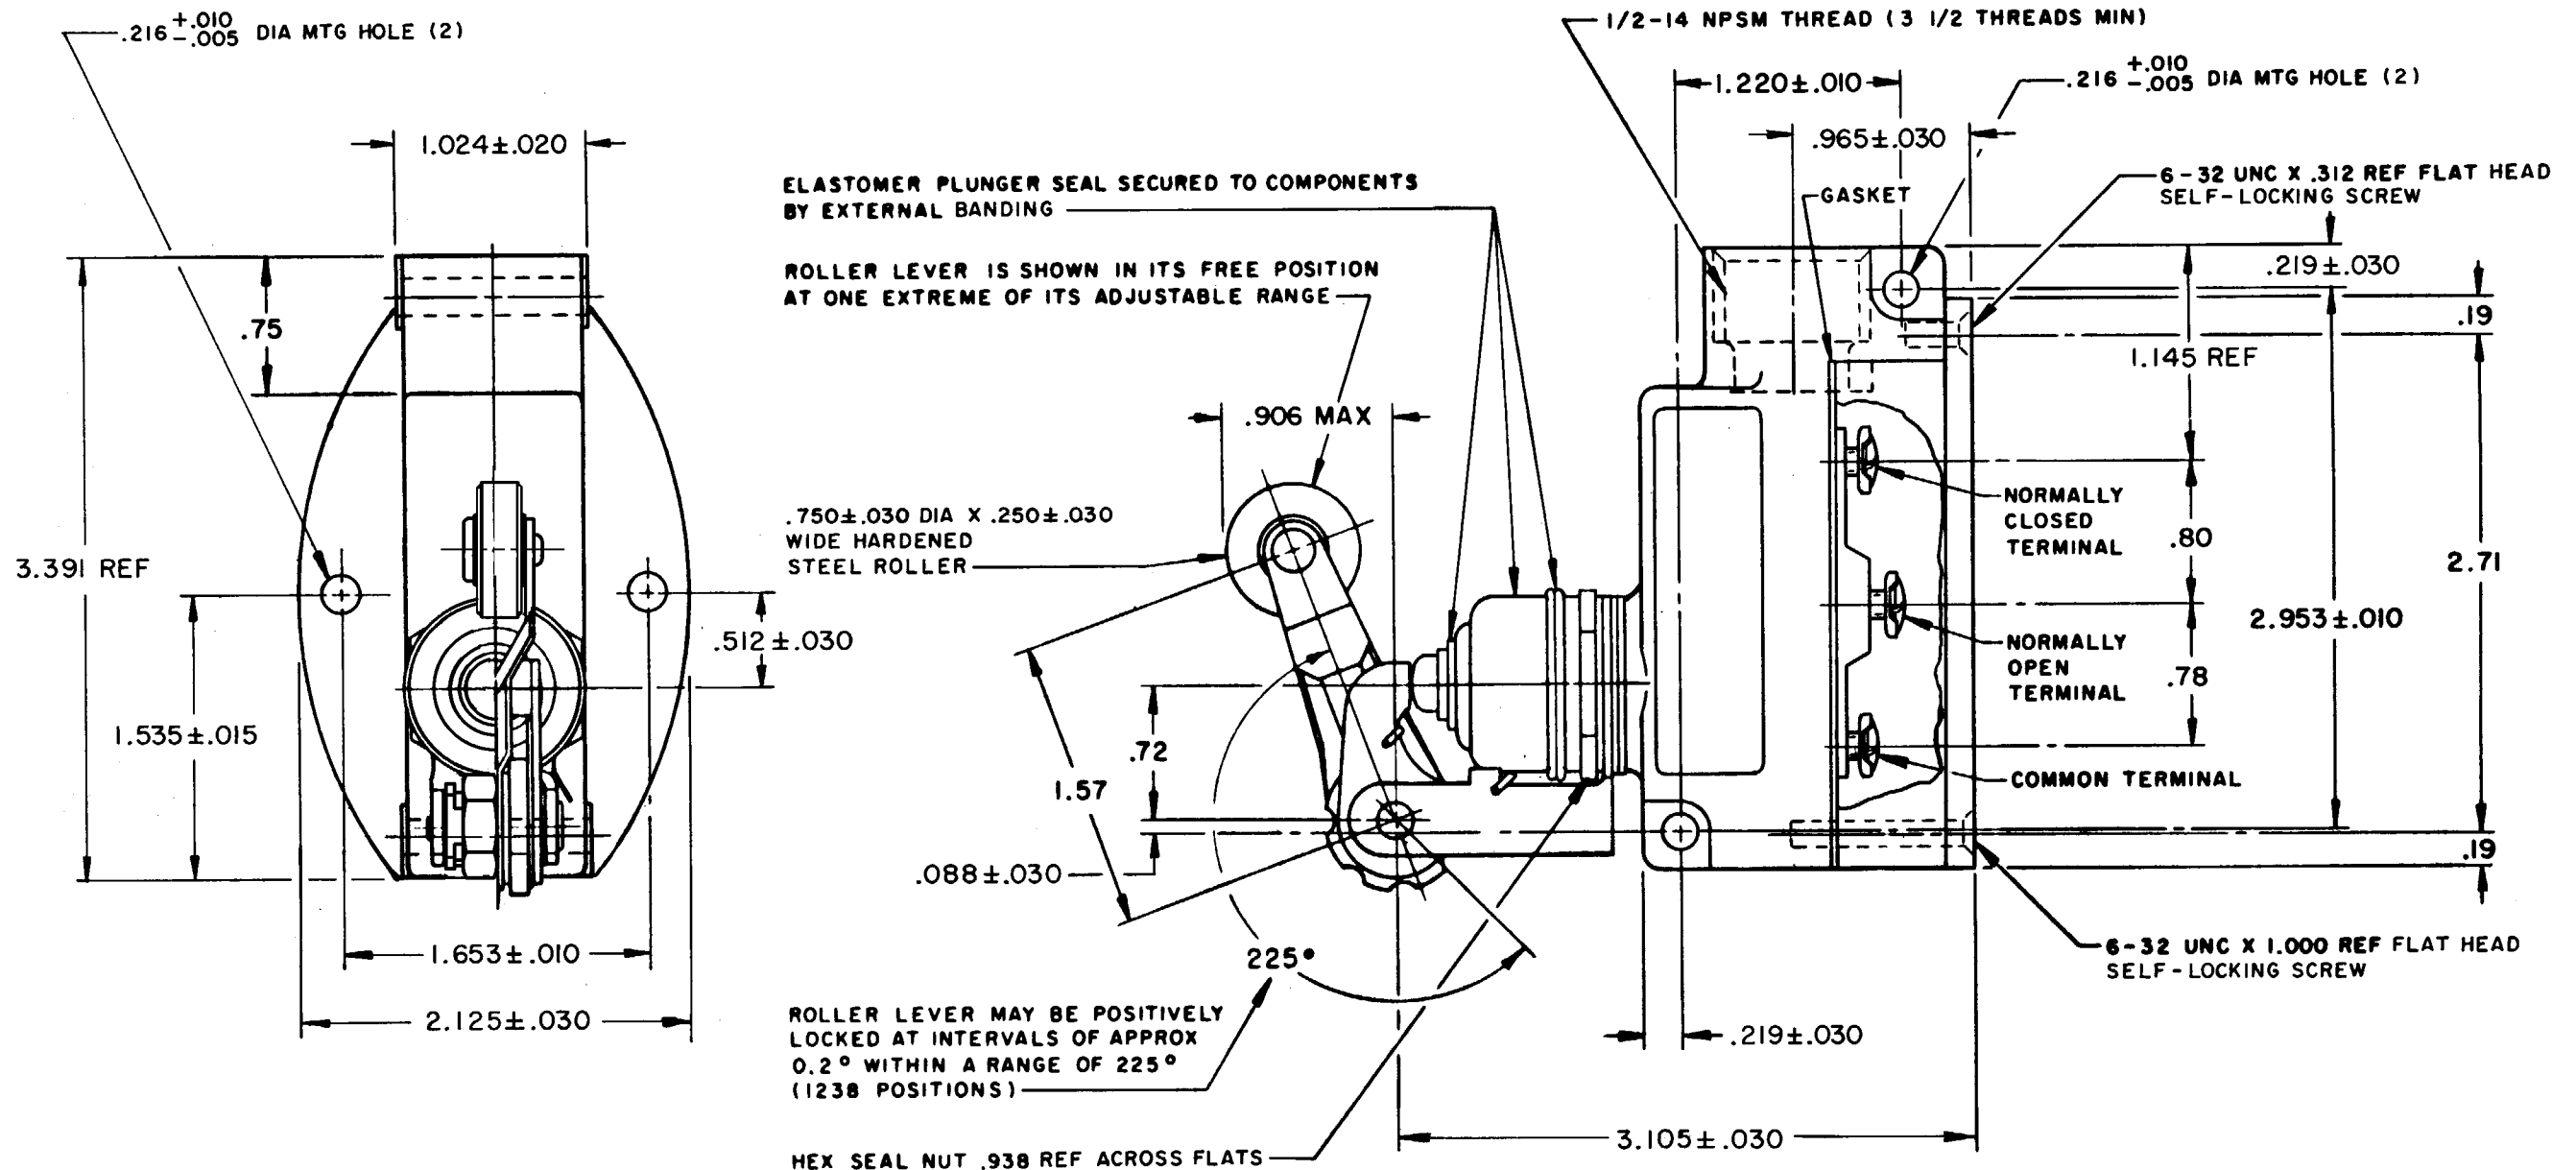

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 10-20 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 6 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8HP-125 VAC; 1/4HP-250 VAC CODE L74 1/2A-125 VDC; 1/4A-250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.008 ANGLES ±
PRETRAVEL - - - - - .188 MAX		WEIGHT
DIFFERENTIAL TRAVEL - - - - .006 MAX		
OVERTRAVEL - - - - - .219 MIN		
SWITCH-BASIC REPLACEMENT - - - BZ-2RN702		

- NOTES**
 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

FORMTEK

DRAWN

OMW

26 FEB 70