


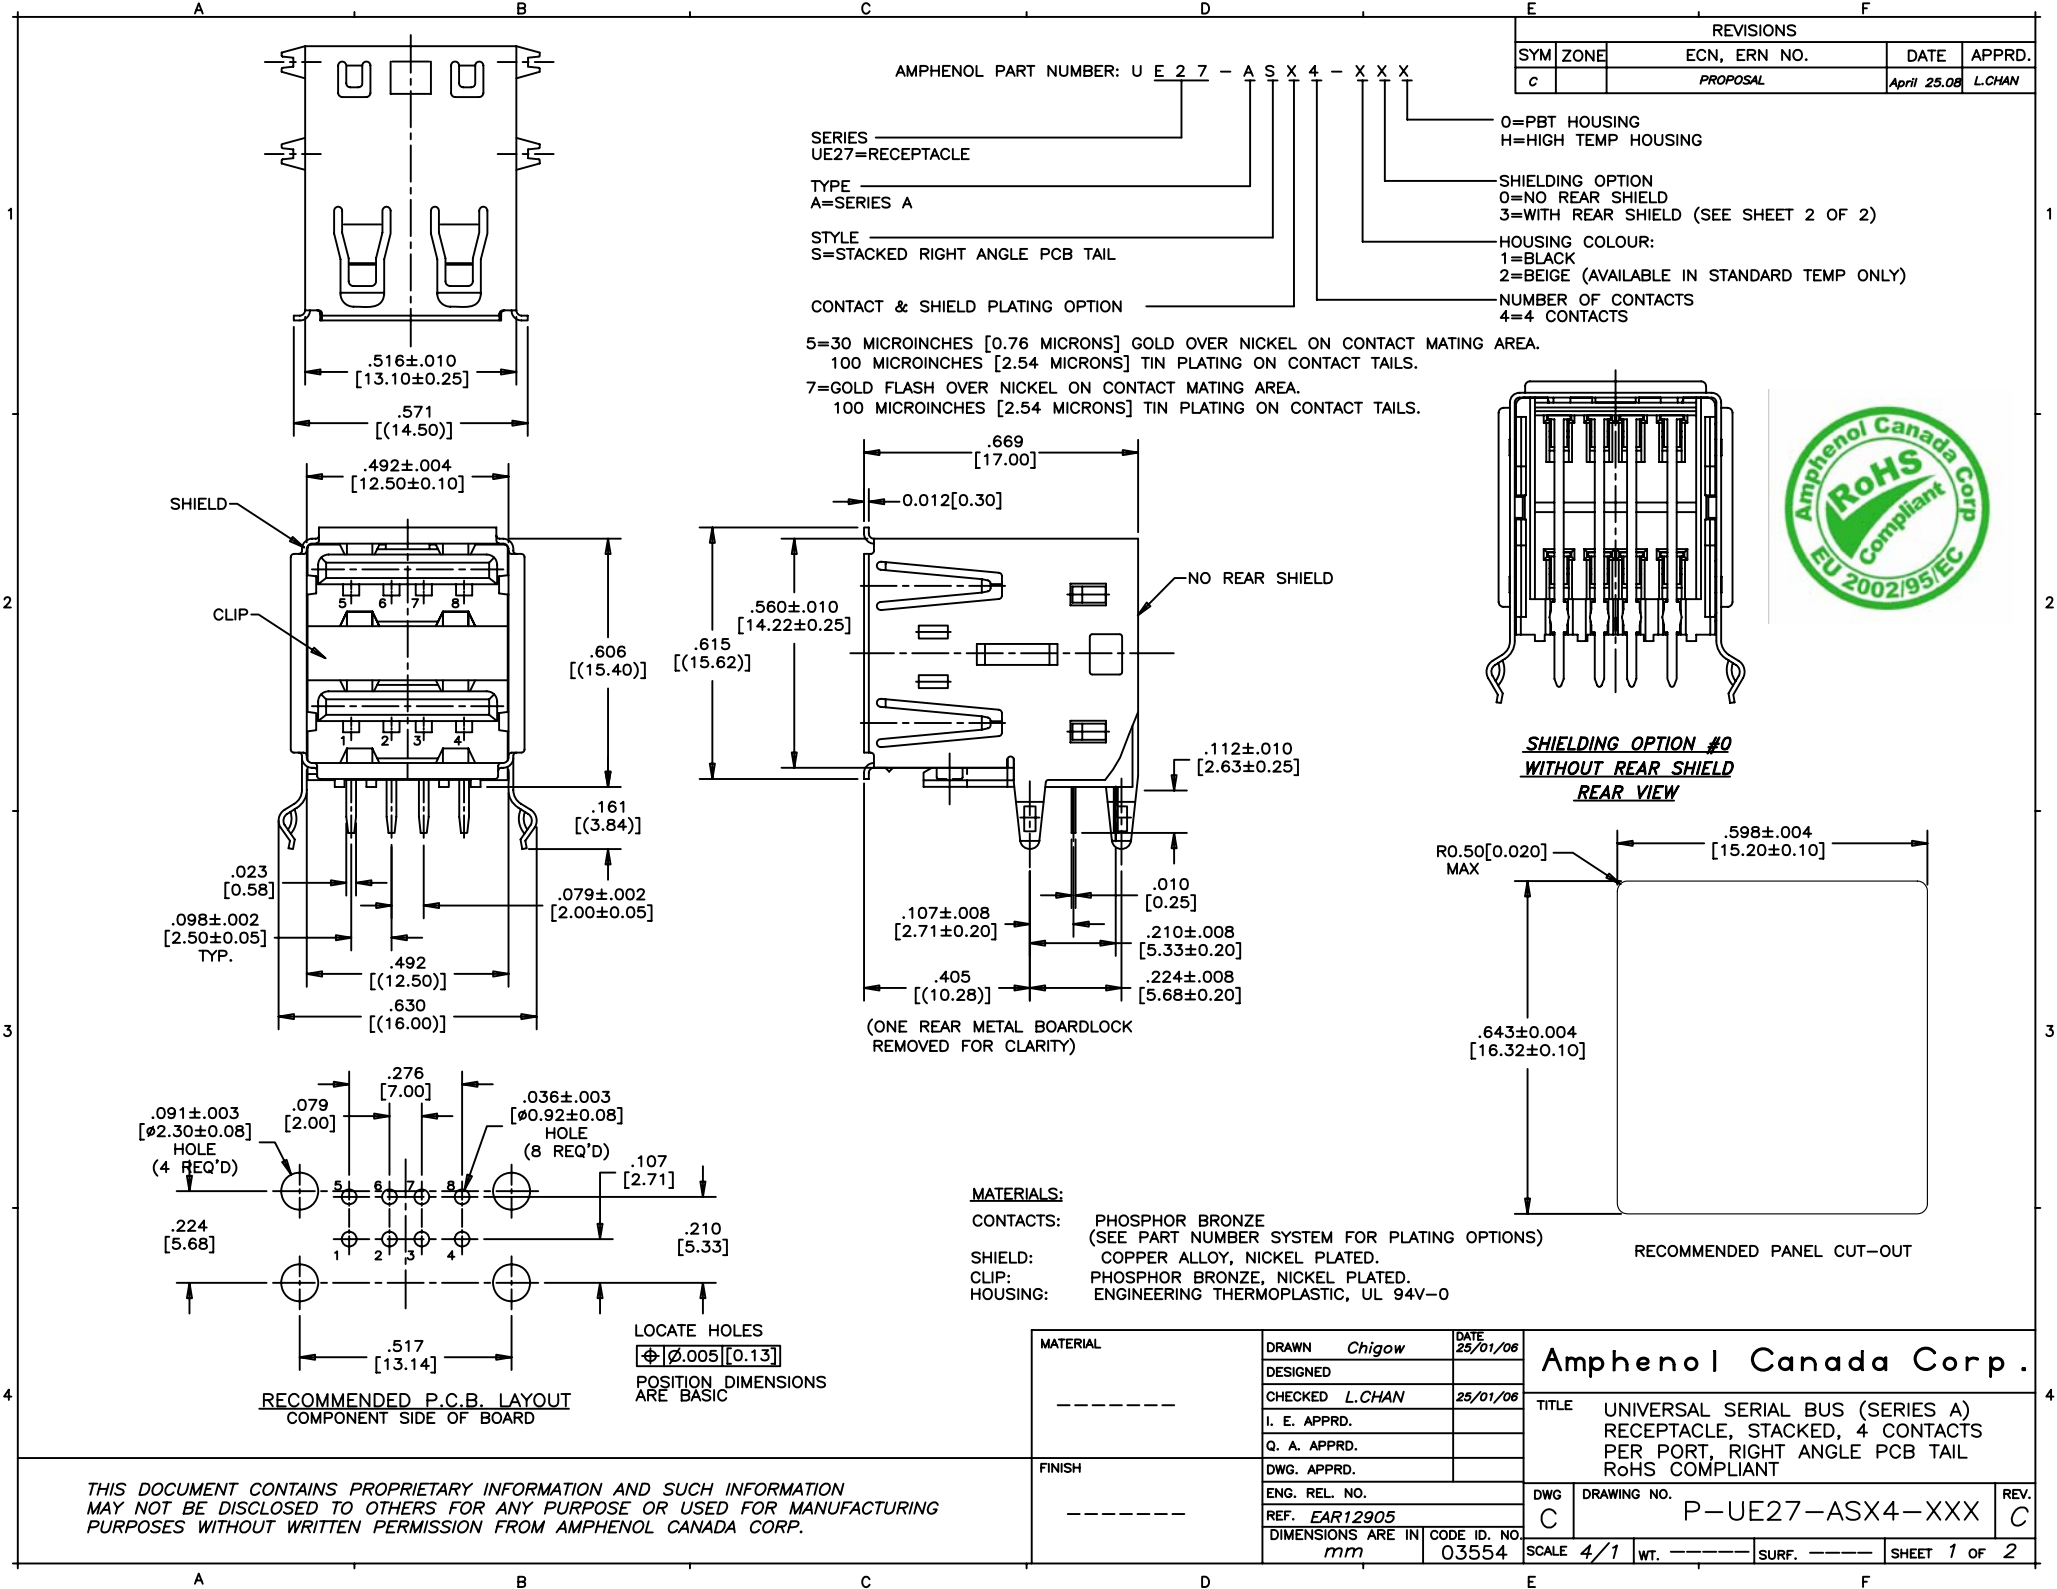

REVISIONS			
SYM	ZONE	ECN, ERN NO.	DATE APPRD.
C		PROPOSAL	APR 25.08 L.CHAN

AMPHENOL PART NUMBER: U E 2 7 - A S X 4 - X X X

SERIES _____
UE27=RECEPTACLE

TYPE _____
A=SERIES A

STYLE _____
S=STACKED RIGHT ANGLE PCB TAIL

CONTACT & SHIELD PLATING OPTION _____




5=30 MICROINCHES [0.76 MICRONS] GOLD OVER NICKEL ON CONTACT MATING AREA.
100 MICROINCHES [2.54 MICRONS] TIN PLATING ON CONTACT TAILS.
7=GOLD FLASH OVER NICKEL ON CONTACT MATING AREA.
100 MICROINCHES [2.54 MICRONS] TIN PLATING ON CONTACT TAILS.

0=PBT HOUSING
H=HIGH TEMP HOUSING

SHIELDING OPTION
0=NO REAR SHIELD (SEE SHEET 1 OF 2)
3=WITH REAR SHIELD

HOUSING COLOUR:
1=BLACK
2=BEIGE (AVAILABLE IN STANDARD TEMP ONLY)


NUMBER OF CONTACTS
4=4 CONTACTS

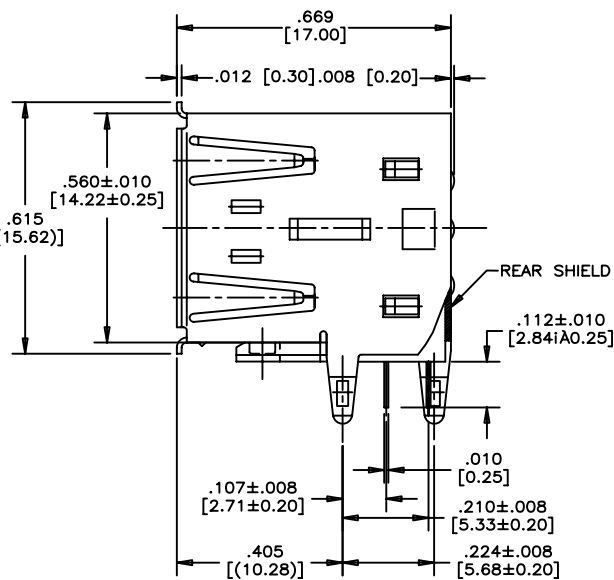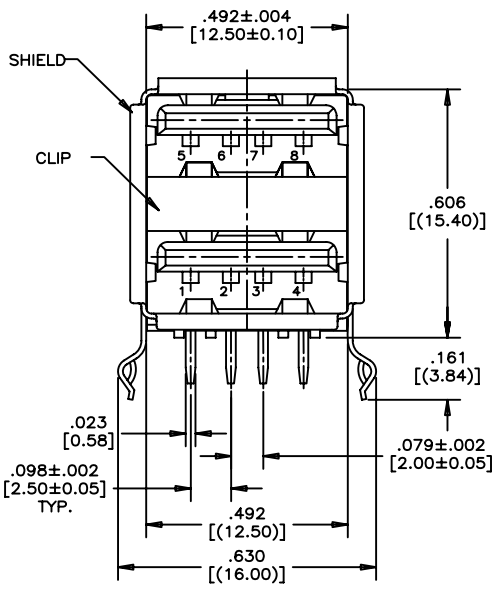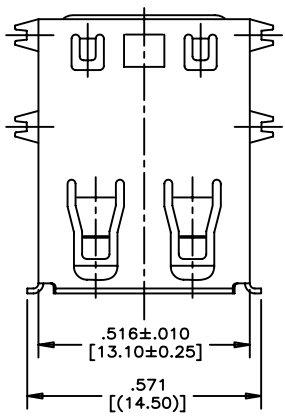


(ONE REAR METAL BOARDLOCK REMOVED FOR CLARITY)

MATERIALS:


CONTACTS: PHOSPHOR BRONZE (SEE PART NUMBER SYSTEM FOR PLATING OPTIONS)
SHIELD: COPPER ALLOY, NICKEL PLATED.
CLIP: PHOSPHOR BRONZE, NICKEL PLATED.
REAR SHIELD: STEEL, NICKEL PLATED.
HOUSING: ENGINEERING THERMOPLASTIC, UL 94V-0.



**SHIELDING OPTION #3
WITH REAR SHIELD
REAR VIEW**

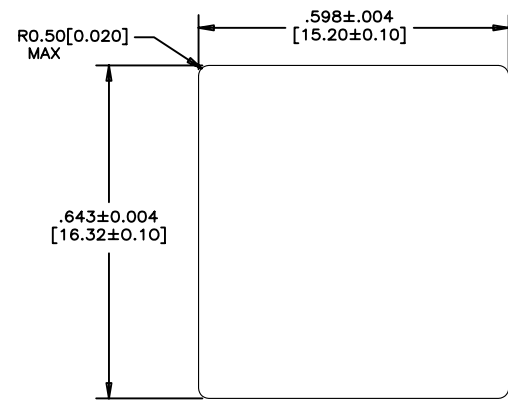

RECOMMENDED PANEL CUT-OUT

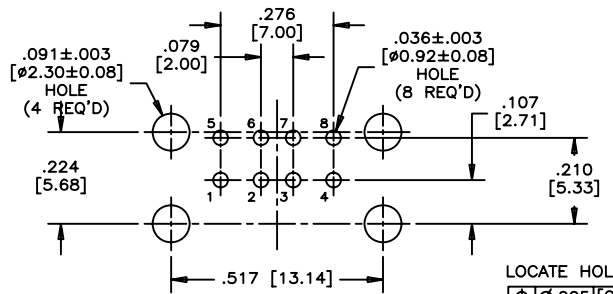

RECOMMENDED P.C.B. LAYOUT
COMPONENT SIDE OF BOARD

LOCATE HOLES
Ø.005 [0.13]
POSITION DIMENSIONS
ARE BASIC

MATERIAL -----	DRAWN Chigow	DATE 25/01/06
	DESIGNED	
	CHECKED L.CHAN	25/01/06
	I. E. APPRD.	
FINISH -----	Q. A. APPRD.	
	DWG. APPRD.	
	ENG. REL. NO.	
	REF. EAR12905	
	DIMENSIONS ARE IN mm	CODE ID. NO. 03554

Amphenol Canada Corp.			
TITLE UNIVERSAL SERIAL BUS (SERIES A) RECEPTACLE, STACKED, 4 CONTACTS PER PORT, RIGHT ANGLE PCB TAIL RoHS COMPLIANT			
DWG C	DRAWING NO. P-UE27-ASX4-XXX	REV. C	
SCALE 4/1	WT. -----	SURF. -----	SHEET 2 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[UE27-AS54-130](#) [UE27-AS54-230](#)