



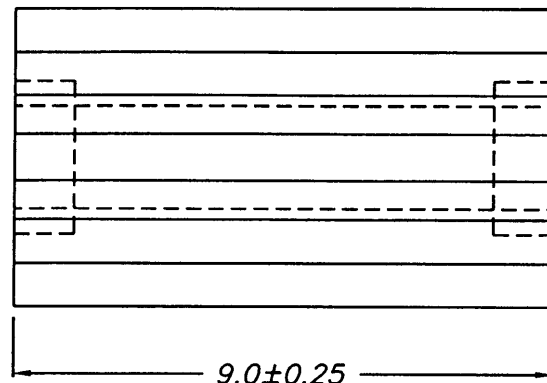

E I DUPONT DE NEMOURS & CO INC
DUPONT POLYMERS, ENGINEERING POLYMERS
NYLON RESINS PO BOX 80713, CHESTNUT RUN
PLAZA, WILMINGTON DE 19880

E41938 (M)

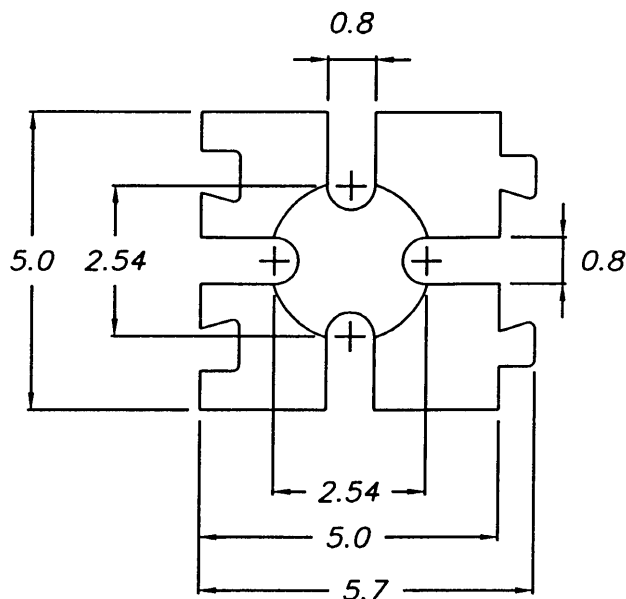

Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI Mech with Imp	H w/o Imp	H I	H A	D V R	C 4 5	T 9 I
Polyamide, Type 66 nylon (PA66), designated "Zytel", furnished in the form of pellets.											
132F	All	0.71	94V-2	125	65	65	4	0	—	—	—
133L 135F		1.5	94V-2	125	75	85	3	0	0	—	—
		3.0	94V-2	125	75	85	2	0	0	6	0
		6.0	94V-2	125	75	85	2	0	0	—	—
✓ 101(I/2), 101F, 101L, E101L, E101(I/1)	All	0.71	94V-2	125	65	65	4	0	—	—	—
		1.5	94V-2	125	75	85	3	0	0	—	—
101(I/2), 101F, 101L, E101L, E101(I/1)	All	3.0	94V-2	125	75	85	2	0	0	6	0
		6.0	94V-2	125	75	85	2	0	0	—	—
EFE1068	All	0.71	94V-2	125	65	65	4	0	—	—	—
		1.5	94V-2	125	75	85	3	0	0	—	—
		3.0	94V-2	125	75	85	2	0	0	6	0
		6.0	94V-2	125	75	85	2	0	0	—	—
EFE1030	All	0.71	94V-2	125	—	—	4	0	—	—	—
		1.5	94V-2	125	75	85	3	0	0	—	—
		3.0	94V-2	125	75	85	2	0	0	6	0
		6.0	94V-2	125	75	85	2	0	0	—	—
FE-3370	NC, GY	0.84	94HB	65	65	65	—	—	—	—	—
FE-3397	NC, GY	0.85	94HB	65	65	65	—	—	—	—	—

TOLERANCE:		
L ≤ 10	±0.2	
10 < L ≤ 30	±0.3	
30 < L ≤ 50	±0.5	
50 < L ≤ 100	±0.7	
100 < L ≤ 250	±1.2	
ABOVE 250	±1.5	

APPROVED BY	張道陽	87.5.06.
REVIEWED BY	蕭存桂	87.5.06.
DRAWN BY	蕭存桂	87.5.06.

MATERIAL: NYLON 66(UL)
FLAME CLASS: 94V-2
COLOR: BLACK

品固企業有限公司
品基電子塑膠製品廠
PINGOOD ENTERPRISE CO., LTD.

PART NAME:
LED 套
LED HOLDER

PART NO:
LEDX-9-B

REV.
A
SIZE
1

SHEET 1 OF 1



UNIT SCALE
mm 8:1

EF0404505